



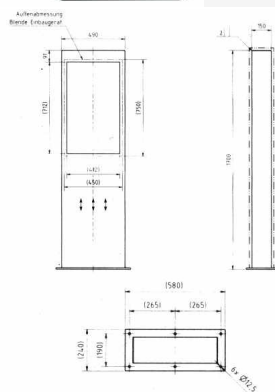

Order number: 599B-VAR-KSDB2101E
Manufacturer: Briefkasten Manufaktur Lippe

ab **€2,800.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

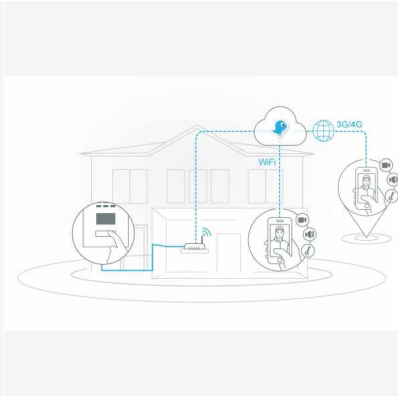

Stainless steel mailbox column designer model BIG with DoorBird D2100E or D1100E video intercom - RAL of your choice

Stylish stainless steel column made of stainless steel V2A 1.4301, powder coated in RAL fine structure matt. The column is fully welded, so no rivets or screws are visible. The letterbox module is also inserted into the pillar with invisible screws. The letterbox module is also made of 2mm stainless steel V2A 1.4301, powder coated in RAL fine structure matt and can be exchanged for a new letterbox module even after many years. Integrated DoorBird IP video door station D2100E or D1100E. The DoorBird IP Video Door Station D2100E or D1100E is the smart solution for your entrance door. The IP Video Door Station can be operated as a standalone unit or integrated into an existing smart home platform. Even existing, classic installations such as a door chime or an electric door and gate opener can continue to be used with DoorBird and controlled via the app.

This is a real eye-catcher among mailboxes. Clean lines and no-frills design characterize the designer mailbox. Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur. Also the DoorBird was not only invented and developed in Germany, but is also produced in Berlin to this day. At DoorBird, "Made in Germany" is not just a seal, but a lived philosophy. The IP video door stations are manufactured in the DoorBird manufactory to guarantee the highest quality, durability and customer satisfaction.

- The mailbox module is made of 2mm stainless steel V2A 1.4301, powder coated in RAL color.
- Front mail removal door 350 mm x 300 mm, to open from top to bottom. Incl. 2 keys with key number.
- Mail slot from front, dimensions of slot: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending.
- The columns are equipped with modules that can be replaced later.
- Optionally with house number, backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0.1-4W for the LED lighting of the house number.
- The fully welded column is made of 1.5mm stainless steel V2A 1.4301, powder coated in RAL color. Construction height is 1.70 m.
- Invisible cable feed through the body is possible.
- The pillar is equipped with a base plate made of VA. This is 10 mm thick and is finished with a cover plate. Thus, the mounting dowels are concealed.
- Incl. DoorBird IP video door station D2100E or D1100E installed.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.

Water protection

To achieve optimum water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible. Mail is only protected from water when it is completely deposited in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Connection technology:	LAN
Height single box in cm:	71,0 75,0
Width single box in cm:	41,0 45,0
Volume single box in liters:	31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Overall height in cm:	170,0
Total width in cm:	49.0 (footplate 58.0)
Depth in cm:	15.0 (footplate 24.0)
Weight in kg:	65,0
Delivery condition:	Delivery is assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.