
Stainless steel intercom for flush-mounting - GIRA System 106 - 1-gang - RAL of your choice | ? Colour of your choice | Gira System 106 complete set Audio 2DB

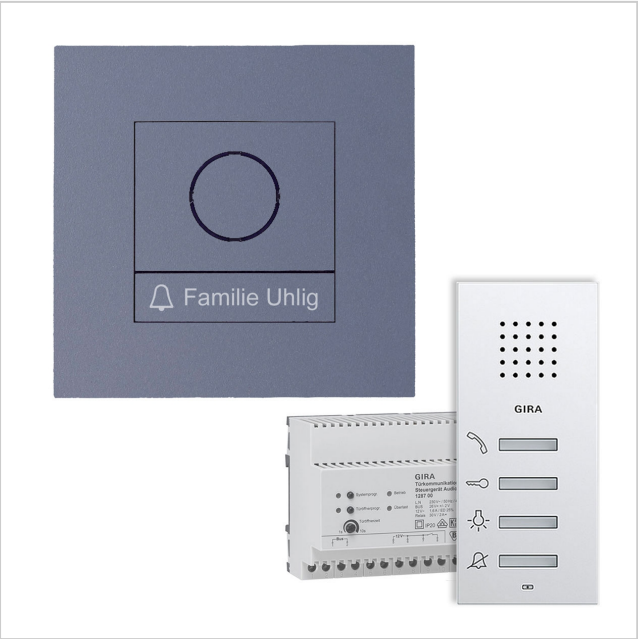

Product number 527-R-UP-1-KSAGI106

Product description

Stainless steel intercom for flush mounting - GIRA System 106 - 1-gang - RAL of your choice

Intercom system for flush-mounted installation of the GIRA System 106. Seamlessly integrated Gira System 106 in flush-mounted design. 1 GIRA system module is included, so the intercom can be used directly. The matching GIRA home station and the control unit to complete this intercom set are included.

- Front panel made of 2 mm stainless steel V2A _1.4301, powder-coated in RAL colour of choice.
- Invisible fixing with bolts on the back.
- Recommended cut-out dimensions: H 143mm x W 143mm x D 50mm.
- Incl. GIRA home station & control unit enclosed, System 106 door station module installed.

Gira System 106 door station module - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with power via the door station module.

Surface-mounted home station Gira 1250XX, enclosed

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Completely pre-assembled surface-mounted home station for quick and clean installation.
- Design diversity through integration into the switch range, resulting in a uniform appearance of door communication and electrical installation.
- Installation both with and without cover frame.
- Simple installation thanks to plug-in screw terminals on the mounting plate. Contact is made to the home station when the home station is plugged onto the mounting plate.
- Easy removal of the home station during renovation work.
- Fixing holes for mounting.
- Signal transmission and power supply to the home station via reverse-polarity protected and short-circuit-proof 2-wire bus.
- Parallel connection of up to three home stations possible (with power supply via 2-wire bus).
- One-man commissioning thanks to simple commissioning procedure.
- Ring tone differentiation between door call, internal call and storey call.
- Choice of five different ring tone melodies that can be individually assigned to individual call buttons.
- Hands-free function (voice-controlled intercom with echo and background noise cancellation).
- Enforcement function for loud ambient noise during voice communication.
- Listen-in blocking.
- Operating buttons with integrated LEDs for status display.

Audio REG control device Gira 128700, enclosed

- Supply of the reverse-polarity protected and short-circuit-proof 2-wire bus.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door release programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for the power supply of a standard electric strike.
- Permanent AC 12 V output for supplying power to a DCS-TC gateway.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301
Mounting type	Flush-mounted

Dimensions

Width in mm	190
Height in mm	190
Total width in mm	190
Depth in mm	20,0
Delivery condition	Delivery is assembled


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



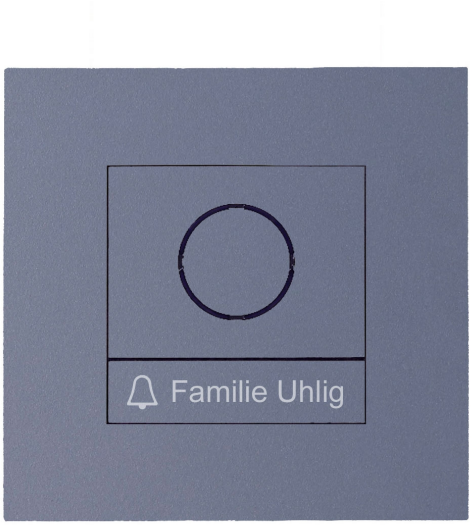

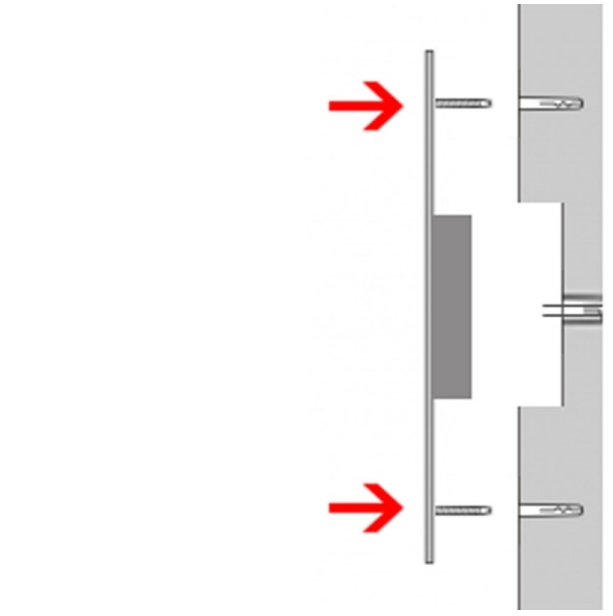


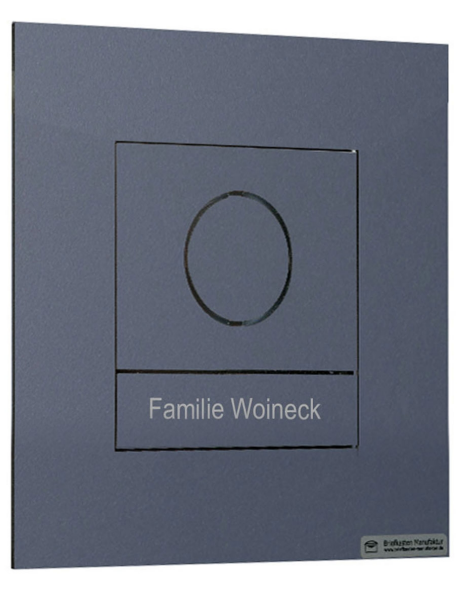

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

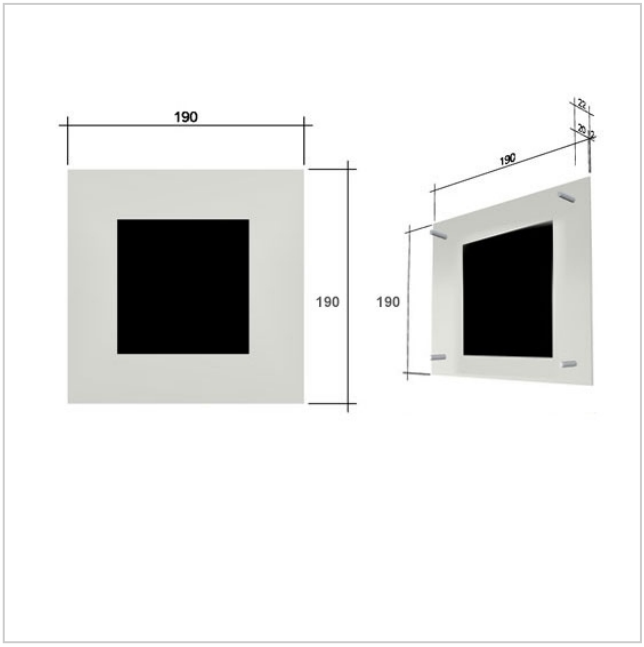

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618