


# Gira surface-mounted home station chrome 1250605 | Chrome

Product number 1250.9

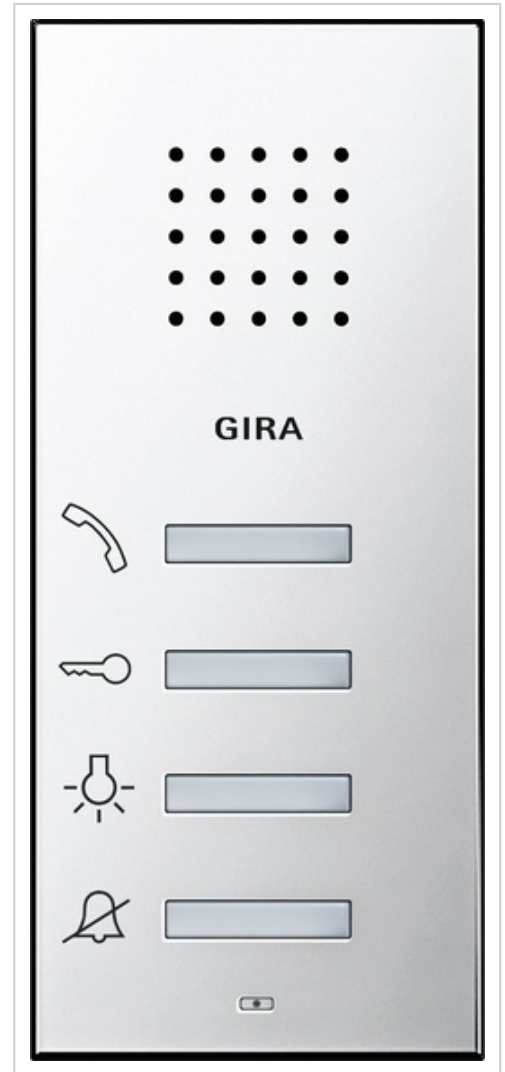

## Product description

### Surface-mounted home station

Hands-free home station as a pre-assembled unit for surface mounting.

- Completely pre-assembled surface-mounted home station for quick and clean installation.
- Design diversity through integration into the switch programme, resulting in a uniform appearance of door communication and electrical installation.
- Installation both with and without cover frame.
- Simple installation thanks to plug-in screw terminals on the mounting plate. The contact to the home station is made when the home station is plugged onto the mounting plate.
- Easy removal of the home station during renovation work.
- Fastening holes for mounting.
- Signal transmission and power supply to the home station via reverse polarity protected and short-circuit proof 2-wire bus.
- Parallel connection of up to three home stations possible (with power supply via 2-wire bus).
- One-man commissioning thanks to simple commissioning procedure.
- Ring tone differentiation between door call, internal call and storey call.
- Choice of five different ring tone melodies that can be individually assigned to individual call buttons.
- Hands-free function (voice-controlled intercom with echo and background noise suppression).
- Enforcement function for loud ambient noise during the voice connection.
- With call blocking.
- Operating buttons with integrated LEDs for status display.

**The operating buttons of the surface-mounted home station control the following functions in conjunction with the switching actuator or the flush-mounted switching actuator:**

- Switching of light and other functions.
- Activation of the door opener.
- Setting the ring tone melody.
- Switching the ring tone on and off.
- Call acceptance.
- Activating the assertion function.
- Setting the ring tone and speech volume.

## Technical data

**Power supply:** 26 V DC &plusmn; 2 V (bus voltage)

### Connections:

2 screw terminals 2-wire bus

2 screw terminals Storey call button

**Temperature range:** -5 &deg;C to +50 &deg;C

## Notes

- Installation without cover frame possible.
- A 2-gang cover frame without centre bar is required for installation with System&nbsp;55 or the switch ranges FI&auml;lschenschalter and E22.
- A cover frame is required for mounting on a device box
- This component can be used to set up telecommunications systems with up to 70 users  
(e.g. 1&nbsp;x built-in loudspeaker, 5&nbsp;x extension module for built-in loudspeaker, 68 x surface-mounted home station).

## Product properties

**Connection technology** 2-wire

**Mounting type** Surface-mounted

## Dimensions

Width in mm 55

Height in mm 127

Depth in mm 20,0

Weight in kg 1