


**Order number:** 306-9007VA-STL  
**Manufacturer:** Briefkasten Manufaktur Lippe  
**Erscheinungsdatum:** 2024-05-13

ab **€199.90 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

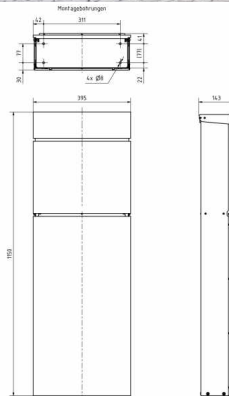

## free-standing letterbox LESSING Edition - Design Elegance 1 - RAL 9007 gray aluminum

The free-standing letterbox LESSING Edition combines elegant, minimalist design with functional excellence. Equipped with an invisible lock and stylish labeling option, it blends seamlessly into any modern living environment. The use of galvanized steel, powder-coated, as well as a stainless steel cover, guarantees long-lasting quality and durability.

With a capacity of approx. 19 liters and a top-access slot, the LESSING Edition ensures that your mail remains crease-free. The insertion flap is equipped with high-quality axle dampers that allow it to close gently. The simple self-assembly and optional personalization make it the ideal letterbox for discerning users who value design, quality and convenience.

Thanks to the design, self-assembly is uncomplicated.

- High-quality letterbox column made of galvanized steel, powder-coated in RAL 9007 grey aluminium fine structure matt.
- Elegance 1 design: Stainless steel front panel, 240 grit polished.
- The door can be opened from top to bottom.
- Insertion from above, insertion flap with high-quality axle dampers for silent closing.
- Includes 2 keys with key number.
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 33.5 cm) for C4 landscape, even large letters fit in here without creasing.
- Generous capacity of approx. 19 liters.
- Optional name lettering approx. 8-25 mm high.
- Optional house number lettering approx. 60-80mm high.
- Letterbox pillar with base plate for screw mounting.

### Important information:

To achieve optimum water protection for your mail, the letterbox or letterbox system should be located under a canopy if possible. The mail is only protected from water if it is fully inserted in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the letterbox. This system is protected against the ingress of water in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

### Abmessungen & Details

<b>Number of parties:</b>	1
<b>Item withdrawal:</b>	Front
<b>Base material:</b>	Steel galvanized
<b>Height single box in cm:</b>	40,0
<b>Width single box in cm:</b>	37,5
<b>Volume single box in liters:</b>	19,0
<b>Height letter slot in cm:</b>	3,5
<b>Width letter slot in cm:</b>	33,5
<b>Height letterbox system in cm:</b>	115,0
<b>Width letterbox system in cm:</b>	39,3
<b>Depth in cm:</b>	12,0 + 2,3 Blende
<b>Weight in kg:</b>	12,0
<b>Delivery condition:</b>	Delivery is completely assembled
<b>Shipping information:</b>	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).