


Stainless steel intercom for flush mounting - GIRA System 106 - 1-gang | Gira System 106 complete set audio | Stainless steel, ground

Product number 527-UP-1-KSAGI106

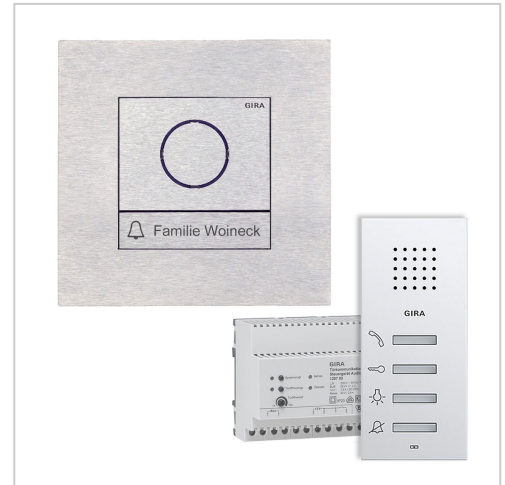

Product description

Stainless steel intercom for flush-mounted installation - GIRA System 106 - 1-gang

Intercom system for flush-mounted installation of the GIRA System 106. Seamlessly integrated Gira System 106 in flush-mounted design. 1 GIRA system module is included, so the intercom can be used directly. The matching GIRA home station and the control unit to complete this intercom set are included.

- Front panel made of 2 mm stainless steel V2A _1.4301, 240 grain polished.
- Invisible fixing with bolts on the back.
- Recommended cut-out dimensions: H 143mm x W 143mm x D 50mm.
- Incl. GIRA home station & control unit enclosed, System 106 door station module installed.

Gira System 106 door station module - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with power via the door station module.

Surface-mounted home station Gira 1250XX, enclosed

- Completely pre-assembled surface-mounted home station for quick and clean installation.
- Design diversity through integration into the switch range, resulting in a uniform appearance of door communication and electrical installation.
- Installation both with and without cover frame.
- Simple installation thanks to plug-in screw terminals on the mounting plate. Contact is made to the home station when the home station is plugged onto the mounting plate.
- Easy removal of the home station during renovation work.
- Fixing holes for mounting.
- Signal transmission and power supply to the home station via reverse-polarity protected and short-circuit-proof 2-wire bus.
- Parallel connection of up to three home stations possible (with power supply via 2-wire bus).
- One-man commissioning thanks to simple commissioning procedure.
- Ring tone differentiation between door call, internal call and storey call.
- Choice of five different ring tone melodies that can be individually assigned to individual call buttons.
- Hands-free function (voice-controlled intercom with echo and background noise cancellation).
- Enforcement function for loud ambient noise during voice communication.
- Listen-in blocking.
- Operating buttons with integrated LEDs for status display.

Audio REG control device Gira 128700, enclosed

- Supply of the reverse-polarity protected and short-circuit-proof 2-wire bus.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door release programming.
- LED status indicators for operation, overload, system programming and door opener programming.
- AC 12 V output for the power supply of a standard electric strike.
- Permanent AC 12 V output for supplying power to a DCS-TC gateway.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your trusted electrician for planning, fitting and installation.

Product properties

Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Camera, Intercom
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301
Surface/colour	Brushed
Mounting type	Flush-mounted

Dimensions

Width in mm	190
Height in mm	190
Total width in mm	190
Depth in mm	20,0
Delivery condition	Delivery is assembled

More images

