




Order number: 592CAR-4-SP-IND-R

Manufacturer: Briefkasten Manufaktur Lippe

ab **€1,799.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

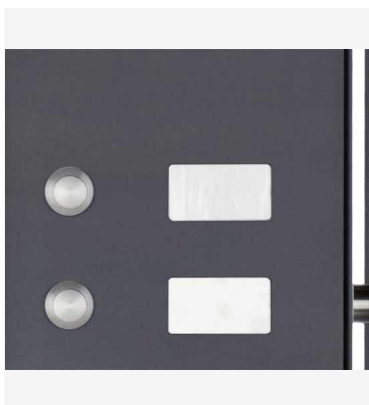

4-compartment Stainless steel surface mailbox Design BASIC Plus 592C AP powder coated - Bell box - INDIVIDUAL

This 4-compartment surface-mounted mailbox system combines the highest quality and modern design. The mailbox system consists entirely of stainless steel V2 A 1.4301, powder coated in RAL color. The grinding pattern impresses with the appearance of the highest elegance. Extremely high quality workmanship and the sophisticated concept make this 4compartment letterbox system our top seller. A rain drainage edge for optimal water protection, rubber bumpers for quiet insertion and the very robust change name plate distinguish this mailbox system.

Thanks to the construction method, self-assembly is uncomplicated.

The letterbox system is created by the letterbox manufactory. 100% Made in Germany, Bad Salzufen.

• Surface-mounted mailbox system for 4 parties with mailboxes made of stainless steel V2A 1.4301, powder coated in RAL color.

- The withdrawal doors can be opened from left to right with rain drainage edge for optimal water protection.
- Insertion flap with noise-damping rubber buffers for very quiet insertion of mail.
- With changeable name plate and 2 keys per individual mailbox.
- The mailboxes comply with DIN EN 13724. Insert size (3.5 cm x 32.5 cm) for DIN C4 landscape, here fit even large letters without bending.

• Incl. close-fitting side panel + rain cover made of stainless steel V2A, powder-coated in RAL color.

• Incl. mounting material for wall mounting.

• Bell intercom unit for 4 rental parties made of 2mm stainless steel V2A 1.4301, powder coated in RAL color

• Dimensions intercom & bell unit: W 170 mm x H 660 mm x D 100 mm. Optionally also mounted on the left side. Please specify.

• 4x bell push buttons, round, stainless steel, max. 24 V AC/DC, 1.5 A, IP 54.

• The inscriptions of the name plates can be exchanged as desired .

• Optionally with house number, white illuminated.

• Preparation (built-in speaker not included) for intercom possible.

• Optional with universal adapter for all commercially available built-in speakers.

• Optional preparation (camera not included) for a camera.

Important information

Camera or intercom preparation

We recommend that the electrical installation is always carried out by an electrician.

We offer preparation of cameras & intercoms from various manufacturers for our mailboxes. The preparation does not include terminal equipment, it is the provision of the screw mounts, holes & perforations. So that you can mount your terminal device without any problems.

Water protection

In order to achieve optimal water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	4
Item withdrawal:	Front
Base material:	Stainless steel
Height single box in cm:	33,0
Width single box in cm:	35,5
Volume single box in liters:	12,0
Height letter slot in cm:	3,5
Width letter slot in cm:	32,5
Height letterbox system in cm:	66,0
Width letterbox system in cm:	88,8
Depth in cm:	10,0
Weight in kg:	32,0
Delivery condition:	Delivery is partially disassembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).