




Order number: 599-KSCSWIFI

Manufacturer: Briefkasten Manufaktur Lippe

ab **€2,899.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

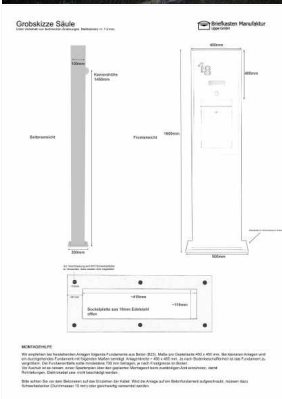

Stainless steel mailbox column designer model - pillar Tower - Comelit VIDEO Komplettsset Wifi

High quality manufactured mailbox column of the brand Briefkasten Manufaktur. Integrated Comelit VIDEO complete set Wifi. Comelit video intercom is an innovative solution with features such as facial recognition, Voice commands and operation via app with your smartphone. Completely pre-programmed for easy installation - connect 2 wires and DONE!

A real eye-catcher among mailboxes. Clear lines and sleek design characterize the designer mailbox pillar Tower. Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur. This system cuts a fine figure everywhere. A modern letterbox made of stainless steel V2A 1.4301, ground as free-standing letterbox.

- The letterbox module is made of 2mm stainless steel V2A 1.4301, 240 grain ground.
- Front mail removal door 240 mm x 300 mm, to open from top to bottom. Incl. 2 keys with key number.
- Mail slot from front, dimensions of slot: W 24 cm x H 3.5 cm, C4 high.
- With built-in damping elements, these let the throw-in flap close slowly and quietly.
- Bell button made of stainless steel with changeable name plate, illuminated.
- The columns are equipped with modules that can be replaced later.
- Optionally, a rear newspaper compartment made of stainless steel V2A 1.4301 is possible.
- The fully welded column is made of 1,5mm stainless steel V2A 1.4301, ground. Construction height is 1.60 m.
- The pillar is equipped with a base plate made of VA. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body is possible.

Important information

Camera or intercom preparation

Intercom systems must be connected by an electrician. Contact your trusted electrician for planning, installation and wiring.

Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely deposited in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

| | |
|-------------------------------------|--|
| Number of parties: | 1 |
| Item withdrawal: | Front |
| Base material: | Stainless steel |
| Connection technology: | 2-wire bus technology |
| Height single box in cm: | 71,0 75,0 |
| Width single box in cm: | 31,0 35,0 |
| Volume single box in liters: | 16,0 |
| Height letter slot in cm: | 3,5 |
| Width letter slot in cm: | 24,0 |
| Overall height in cm: | 160,0 |
| Total width in cm: | 40.0 (footplate 50.0) |
| Depth in cm: | 10.0 (foot plate 20.0) |
| Weight in kg: | 48,0 |
| Delivery condition: | Delivery is assembled |
| Shipping information: | Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date. |