




**Order number:** 515-VAR-KSCSWIFI-UP100


**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€2,039.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users  
with VAT ID and Non-EU countries)

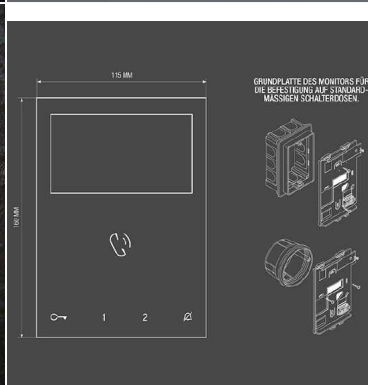

Alle Angaben unter Vorbehalt von technischen Änderungen in mm. Maßtoleranzen möglich +/- 2mm.

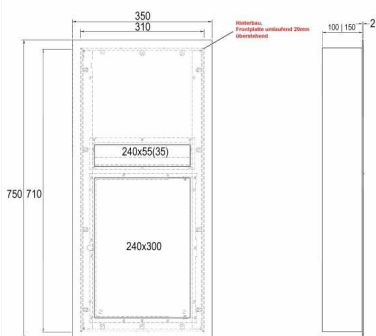

## **Stainless steel mailbox designer model - RAL of your choice - Comelit VIDEO Komplettsset Wifi**

High quality manufactured mailbox of the brand Mailbox Manufacture. Integrated Comelit VIDEO complete set Wifi. Comelit video intercom is an innovative solution with features such as face recognition, voice commands and operation via app with your smartphone. Completely pre-programmed for easy installation - connect 2 wires and DONE!

A real eye-catcher among mailboxes. Clear lines and sleek design characterize the designer mailbox. Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Designer stainless steel single-wall mailbox made of 2 mm stainless steel V2A 1.4301, front panel powder-coated in RAL of your choice. Optionally also as surface-mounted variant.
- Frontal mail removal door 240 mm x 300 mm, to open from top to bottom. Incl. 2 keys with key number.
- Mail slot from front, dimensions of slot: W 24 cm x H 3.5 cm, C4 high.
- With built-in damping elements, these let the throw-in flap close slowly and quietly.
- Bell button made of stainless steel with changeable name plate, illuminated.
- Dimensions of flush-mounted or surface-mounted box: H 710 mm x W 310 x D 100 | 150 mm. Flush-mounted box with pre-punched cable inlets and fixing points on all sides. Surface box for wall mounting with perforation on the back, surface box for fence mounting without perforation (must be done on site). ATTENTION: The front panel of the surface-mounted box also protrudes by 2 cm.
- Plaster box made of galvanized steel. Surface box made of stainless steel V2A, ground on all sides without visible screw connection.
- Plaster box with pre-punched cable inlets on all sides.

### **Important information**

#### **Camera or intercom preparation**

**Intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.**

#### **Water protection**

To achieve optimum water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible. Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### **Abmessungen & Details**

<b>Number of parties:</b>	1
<b>Item withdrawal:</b>	Front
<b>Base material:</b>	Stainless steel
<b>Connection technology:</b>	2-wire bus technology
<b>Height single box in cm:</b>	71,0   75,0
<b>Width single box in cm:</b>	31,0   35,0
<b>Volume single box in liters:</b>	16,0   24,0
<b>Height letter slot in cm:</b>	3,5
<b>Width letter slot in cm:</b>	24,0
<b>Depth in cm:</b>	10,0   15,0
<b>Weight in kg:</b>	28,0
<b>Delivery condition:</b>	Delivery is assembled
<b>Shipping information:</b>	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).