




Order number: 592CAR-2-SPDB-R

Manufacturer: Briefkasten Manufaktur Lippe

ab **€2,409.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

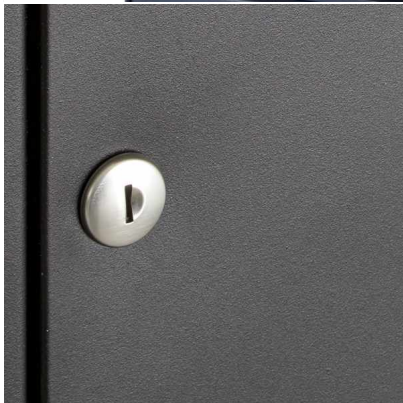

Doppelwandsystem
Enganliegende Seitenverkleidung
Enganliegendes Regendach
aus 1,5mm Edelstahl V2A

2-compartment Surface mount mailbox BASIC Plus 592C AP with DoorBird D2100E video intercom - RAL of your choice

This 2-compartment mailbox system combines the highest quality and modern design. The system is made entirely of stainless steel V2 A 1.4301, powder coated in RAL color. Extremely high quality workmanship and the sophisticated concept make this 2-compartment surface mailbox our top seller. A rain drainage edge for optimal water protection, rubber bumpers for quiet insertion and the very robust change name plate distinguish this surface mailbox. Integrated DoorBird IP Video Door Station D2100E. The DoorBird IP Video Door Station D2100E is the smart solution for your front door. The IP Video Door Station can be operated as a standalone unit or integrated into an existing smart home platform. Even existing, classic installations such as a door chime or an electric door and gate opener can continue to be used with DoorBird and controlled via the app.

Thanks to the construction method, self-assembly is uncomplicated.

Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur. DoorBird was also not only invented and developed in Germany, but is also produced in Berlin to this day. At DoorBird, "Made in Germany" is not just a seal, but a lived philosophy. The IP video door stations are manufactured in the DoorBird manufactory to guarantee the highest quality, durability and customer satisfaction.

• **Surface-mounted mailbox for 2 parties with mailboxes made of stainless steel V2A 1.4301, powder coated in RAL color.**

- The removal doors can be opened from left to right with rain drainage edge for optimum water protection.
- Insertion flap with noise-damping rubber buffers for very quiet insertion of mail.
- With changeable name plate and 2 keys per individual mailbox.
- The mailboxes comply with DIN EN 13724. Insert size (3.5 cm x 32.5 cm) for DIN C4 landscape, here fit even large letters without bending.
- Incl. close-fitting side paneling + rain roof made of stainless steel V2A, powder-coated in RAL color.
- **Bell intercom unit for 2 rental parties made of 2mm stainless steel V2A 1.4301, RAL color**
- Dimensions intercom & bell unit: W 170 mm x H 660 mm x D 100 mm.
- Optionally with house number, white illuminated.
- Incl. DoorBird IP video door station D2100E with button illuminated installed.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, installation and installation.

Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	2
Item withdrawal:	Front
Base material:	Stainless steel
Connection technology:	LAN
Height single box in cm:	33,0
Width single box in cm:	35,5
Volume single box in liters:	12,0
Height letter slot in cm:	3,5
Width letter slot in cm:	32,5
Height letterbox system in cm:	66,0
Width letterbox system in cm:	53,3
Depth in cm:	10,0
Weight in kg:	22,0
Delivery condition:	Delivery is partially disassembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).