




**Order number:** 599B-2-KSCSWIFI

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€4,339.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users  
with VAT ID and Non-EU countries)

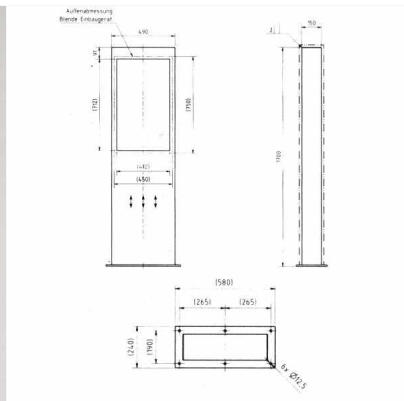

## 2-compartment Stainless steel mailbox column designer BIG - Comelit VIDEO Komplettsset Wifi

Stylish stainless steel column made of stainless steel V2A 1.4301, polished. Integrated Comelit VIDEO complete set Wifi. Comelit video intercom is an innovative solution with features such as facial recognition, Voice commands and operation via app with your smartphone. Completely pre-programmed for easy installation - connect 2 wires and DONE!

The column is fully welded, so no rivets or screws are visible. The letterbox module is also inserted into the pillar with invisible screws. The letterbox module is also made of 2mm stainless steel V2A 1.4301, ground and can be exchanged for a new letterbox module even after many years. This letterbox stele is manufactured at Briefkasten Manufaktur. Made in Germany, Bad Salzufen.

- The letterbox module is made of 2mm stainless steel V2A 1.4301, ground.
- Front-side mail removal doors 350 mm x 300 mm, to open from top to bottom. Incl. 2 keys with key number.
- Mail slot from front, dimensions of slot: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending.
- With built-in damping elements, these let the insertion flap close slowly and quietly.
- Bell button made of stainless steel with changeable name plate, illuminated.
- The columns are equipped with modules that can be replaced later.
- Removal doors to open from top to bottom.
- Optionally with house number, backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0.1-4W for the LED lighting of the house number.
- The fully welded column is made of 1.5 mm stainless steel V2A 1.4301, ground. Construction height is 1.70 m.
- Invisible cable feed through the body is possible.
- The pillar is equipped with a base plate made of VA. This is 10 mm thick and is finished with a cover plate. This way the fixing dowels are concealed.

### Important information

#### Camera or intercom preparation

**The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.**

#### Water protection

To achieve optimum water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible. Mail is only protected from water when it is completely deposited in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

<b>Number of parties:</b>	2
<b>Item withdrawal:</b>	Front
<b>Base material:</b>	Stainless steel
<b>Connection technology:</b>	2-wire bus technology
<b>Height single box in cm:</b>	51,0   55,0
<b>Width single box in cm:</b>	41,0   45,0
<b>Volume single box in liters:</b>	31,0
<b>Height letter slot in cm:</b>	6,3
<b>Width letter slot in cm:</b>	35,0
<b>Overall height in cm:</b>	170,0
<b>Total width in cm:</b>	49.0 (footplate 58.0)
<b>Depth in cm:</b>	15.0 (footplate 24.0)
<b>Weight in kg:</b>	75,0
<b>Delivery condition:</b>	Delivery is assembled
<b>Shipping information:</b>	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.