


**Order number:** 3894AR-2-SP-7016-R

**Manufacturer:** Briefkasten Manufaktur Lippe



ab **€3,041.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

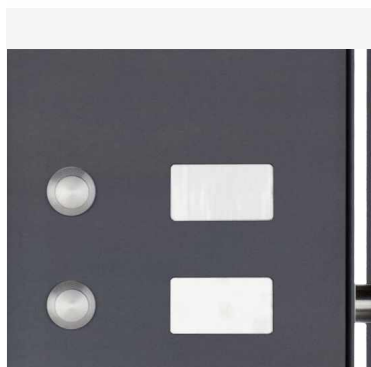

## 2-compartment Surface mount mailbox with showcase BASIC Plus 389 AP with bell box - 710x660 - RAL color

High quality surface mailbox made in Germany by Briefkasten Manufaktur. The ideal solution for simple poster display indoors and outdoors.

The showcase is completely made of aluminum, powder coated in RAL color. The showcase is suitable for 2x DIN A-4 sheets, the showcase has a white, magnetic back wall and a white text panel in the upper viewing area. The glazing is made of single-pane safety glass, the integrated ventilation openings prevent the pane from fogging up.

The letterboxes are made of stainless steel V2A, powder coated in RAL color. The very high-quality processing and the thought-out concept make this free-standing letterbox our top seller. A rain drainage edge for optimal water protection, a continuous rubber lip for quiet insertion, the solid interchangeable name plate, a practical mail holding bracket and the very robust lock characterize this free-standing letterbox. The side panel with protruding rain cover made of stainless steel V2A offers optimum protection against the weather and guarantees a very long service life.

The letterboxes of the BASIC Plus collection are characterized by the consistent use of stainless steel V2A. The result is a very high durability and sustainability. The design has been developed by our own engineers with a view to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus units.

### • 2-compartment Surface-mounted mailbox with aluminum showcase and bell box, powder coated in RAL color.

- The system is made at the letterbox manufactory. German quality production "Made in Germany".
- Suitable for 2x DIN A-4 sheets.
- Glazing made of single-pane safety glass / ESG. Integrated ventilation openings against fogging of the pane.
- The viewing area has a surface of W 560 x H 520mm minus text panel H 80mm.
- Text panel made of white acrylic text panel, removable, without text. The text panel can be easily covered with labeling foil. Illumination in environmentally friendly, energy-saving LED technology possible.
- The door can be opened from left to right with safety lock incl. 2 keys.
- Magnetic back panel in RAL color.
- Angular aluminum frame construction with internal corner connectors (no plastic!).
- **Letterboxes made of stainless steel V2A, powder coated in RAL color**
- The mailboxes comply with DIN/EN 13724. Insert size (3.5 cm x 32.5 cm) for C4 crosswise, large letters also fit in here without bending.
- Insertion flaps with noise-absorbing rubber buffers for very quiet insertion of mail.
- Incl. side panel + rain cover made of stainless steel V2A, powder coated in RAL color.
- Incl. 2 keys with key number, changeable name plate under the access flap and mail holding bracket.
- **Bell intercom unit for 2 rental parties made of 2mm stainless steel V2A 1.4301, powder coated in RAL color**
- Dimensions intercom & bell unit: W 170 mm x H 660 mm x D 100 mm. Optionally also mounted on the left side. Please specify.
- 2x bell push buttons, round, stainless steel, max. 24 V AC/DC, 1.5 A, IP 54.
- The inscriptions of the name plates can be exchanged as desired.
- Optionally with house number, white illuminated.
- Preparation (built-in speaker not included) for intercom possible.
- Optional with universal adapter for all commercially available built-in loudspeakers.
- Optional preparation (camera not included) for a camera.

### Important information

#### Camera or intercom preparation

**We recommend that the electrical installation is always carried out by an electrician.**

We offer preparation of cameras & intercoms from different manufacturers for our mailboxes. The preparation does not include terminal equipment, it is the provision of the screw mounts, holes & perforations. So that you can mount your terminal device without any problems.

#### Water protection

In order to achieve optimal water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1cm). This is not a reason for complaint.

### Abmessungen & Details

Number of parties:	2
Item withdrawal:	Front
Base material:	Stainless steel, Aluminum
Height single box in cm:	BK 33.0   SK 66.0   SP 66.0
Width single box in cm:	BK 35.5   SK 71.0   SP 17.0
Volume single box in liters:	12,0
Height letter slot in cm:	3,5
Width letter slot in cm:	32,5
Height letterbox system in cm:	66,0
Width letterbox system in cm:	123,5
Depth in cm:	10,0
Weight in kg:	62,0
Delivery condition:	Delivery is completely assembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).