




**Order number: 527-KSVST7**  
**Manufacturer: STR Elektronik**

ab **€2,149.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

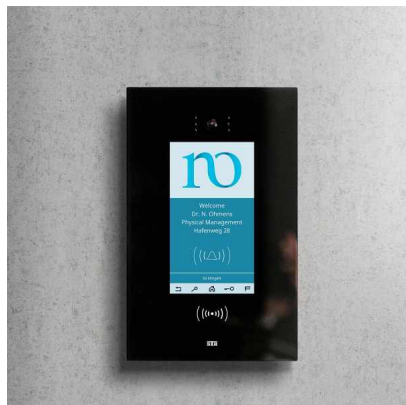

Die visuellen Auswahlhilfe und die komfortable Suchfunktion helfen beim schnellen Auffinden der gewünschten Person auch bei einer Vielzahl von gespeicherten Telefonnummern.



Der integrierte mit großformatigen Text- und Bildinformationen versehene Display erleichtert die schnelle Identifizierung bei Firmen, Abteilungen, Wohngemeinschaften, Arztpraxen etc.




Unter Nutzung der berührungsfreien Tasten nach DIN 19464. Für Menschen mit beeinträchtigtem Hörvermögen werden die jeweiligen Funktionsschritte visuell angezeigt.



Für jeden Telefonaten können eine Ruf- (z. B. Logo) und bis zu 4 Textzeilen gespeichert werden. So lassen sich zusätzlich zur Frage auch Geburtsdatum, Abteilungen, Öffnungszeiten etc. anzeigen.



Die integrierte Technik für Qwikbus-Sprechanlagen steht für eine hohe Sprachqualität. Für Videoansprechungen liefert die integrierte Kamera ein scharfes, kontrastreiches Bild.



Mit elektronischem Kommutator oder elektronischer Schaltung mit rotierender Differenzierung erhalten berechnete Personen durch Auslösen des elektrischen Türöffners einfach und sicher Zugang zum Gebäude.



## STR Qwiksmart Touch 7 Digital Door Station - Complete Set - Camera Intercom with Digital Touch Monitor and Home Station

With the Qwiksmart Touch door station, every visitor feels immediately welcome. Door call, intercom and electronic access control are combined in one compact, easy-to-use device. An easy-to-read, large 7" color display behind the elegant front made of special tempered glass automatically greets the user as he approaches with a customizable welcome screen. Simply with a tap of the finger, the visitor selects the desired function directly on the capacitive touch display, which the powerful computer, specially developed for industrial applications, implements quickly and precisely.



### STR Qwiksmart Touch 7 Digital Door Station - 13610

Operating the Qwiksmart Touch door station is very convenient and child's play. Thanks to a specially developed user interface as well as the intuitive operating concept, every user finds his way around quickly and safely. Few operating steps as well as easily understandable symbols help with the operation in a language-neutral way. Visual and acoustic feedback in the operating sequence also supports people with impaired vision or hearing. The integrated search function allows the desired person to be found and called quickly, even from a large number of subscribers. The perfect combination of design and technology Door call and communication between visitor and subscriber take place securely and with excellent speech quality in conjunction with a Qwikbus intercom system. A color camera is already integrated for the video function. The LEDs are switched on automatically and the system switches to night mode. Two different methods for electronic access control are also already integrated: The RFID reader is suitable for opening the door by means of an electronic key. Alternatively, the switching process can also be triggered by entering a PIN code via the virtual numeric keypad.

#### Mobile door communication via app

The door station can forward the doorbell ring to the Qwiksmart plus smartphone app, thus enabling the door to be spoken to, seen and opened using the app. For this to work, the smartphone must be connected to an existing account at the door station. For this purpose, the "Qwiksmart plus app activation" function must be activated in the account. The purchase of the door station automatically includes two licenses for "Qwiksmart plus app connection". If more apartments want to use the Qwiksmart plus app connection, the corresponding licenses must be purchased. Up to five end devices can be registered per account.

- multifunctional unit for 2-wire intercom systems.
- 7" touch display for operation directly on the display.
- integrated audio/video intercom, usable with all Qwikbus indoor stations for audio and video.
- acoustic and visual status indication of the intercom system for accessibility according to DIN 18040 (two-senses principle).
- Subscriber list for up to 2000 subscribers, with convenience search function (by name, department, etc.).
- Proximity sensor for automatic activation of the display when a person approaches.
- multiple languages, logos, maps etc.
- integrated camera, resolution up to Full-HD 1920 x 1080 px, automatic activation of integrated IR-LED illumination in darkness, recommended installation height camera approx. 160 cm above OKFF.
- Temperature range -20°/+50° C.
- integrated technology for electronic keyless access control by means of virtual code module (combination lock with rotating numeric display) and integrated RFID reader (for electronic transponder keys).
- required power supply 12 V DC or PoE.
- Connection for door opener (requires 12 V AC bell transformer, NTR201).
- Programming/administration by means of PC or mobile device via network (also via remote maintenance).
- Detection of tampering attempts with tamper contact.
- Front safety glass black for high vandalism protection.
- as compact complete unit for flush mounting directly into the wall.

#### STR handsfree station - optionally AUDIO or VIDEO

##### STR Bus power supply SP333 - 33306

- The bus power supply SP333 manages the bus data and provides up to 4x door opener outputs 12V/AC 1A and 2x light relay outputs 12V/AC 1A. The device is mounted on a top-hat rail according to DIN EN 60715.
- for top hat rail mounting, 6 TE

##### STR Power supply unit SNT333 - 33305

- The power supply unit SNT333 is used for power supply of STR Qwikbus video systems. It is also used in Qwikbus audio systems from approx. 30 subscribers. The output voltage is 24V/DC and can also be adjusted via a potentiometer (ADJ). It is mounted on a top-hat rail according to DIN EN 60715.
- for top hat rail mounting, 5 TE

##### STR DC power supply for operating external cameras - 31512

- for top hat rail mounting, 1 division unit

##### STR ballast transformer NTR201 - 10631

- for top hat rail mounting, 6 pitch units

### Abmessungen & Details

**Number of parties:** 1, 2, 3, 4, 5, 6, <2000

**Base material:** Plastic

**Connection technology:** 2-wire bus technology, LAN

**Number of bell buttons:** <2000, 2, 6, 5, 4, 3, 1

**Height in cm:** Front 28.1 | UP box 27.5

**Width in cm:** Front 17.6 | UP box 16.1

**Depth in cm:** Front 0.5 | UP box 6.5

**Weight in kg:** 3,0

**Delivery condition:** Delivery is assembled

**Shipping information:** Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).