
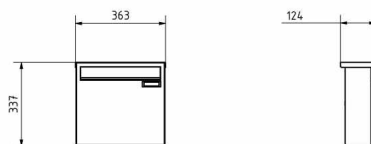


**Order number:** 382XAZ-VA-S1

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€269.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users  
with VAT ID and Non-EU countries)



## Stainless steel fence mailbox BASIC Plus 382XZ - stainless steel polished - removal from the rear side

High-quality manufactured fence mailbox from the mailbox manufactory. The insertion is on the front side, the residents can remove the mail from the back. The mounting of the mailbox can be done via the optional rod mat mounting in your fence, if this is not chosen, the mailbox should be fitted and perforated on site by your fence builder. The complete fence mailbox is made of weather-resistant stainless steel V2A 1.4301, 240 grain ground. A rain drainage edge for optimal water protection, an insertion flap with rubber buffer, the solid changeable name plate, a practical mail retaining bracket and the very robust lock characterize this stainless steel mailbox.

The letterboxes of the BASIC Plus collection are characterized by the consistent use of stainless steel V2A. The result is a very high durability and sustainability. The construction has been developed by our own engineers with regard to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

- Fence mailbox made of stainless steel V2A 1.4301, 240 grain ground.
- The system is created at the letterbox manufactory. German quality production "Made in Germany".
- The mailbox complies with DIN/EN 13724. Insert size (3.5 cm x 32.5 cm) for C4 crosswise, here fit even large letters without bending.
- Insertion flap with noise-damping rubber seal for very quiet insertion of mail.
- The door can be opened from left to right.
- Incl. 2 keys with key number, changeable name plate (type 2) under the access flap and mail holding bracket.
- Incl. side cover + rain cover made of stainless steel V2A 1.4301, ground.
- Suitable for fence mounting, the mounting holes must be made on site. Optionally with bar mat holder.

### Important information:

Mail is protected from moisture and dirt only when fully inserted and flap closed. In certain extreme weather conditions, water may nevertheless enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

<b>Number of parties:</b>	1
<b>Item withdrawal:</b>	Back
<b>Base material:</b>	Stainless steel
<b>Height single box in cm:</b>	33,0
<b>Width single box in cm:</b>	35,5
<b>Volume single box in liters:</b>	12,0
<b>Height letter slot in cm:</b>	3,5
<b>Width letter slot in cm:</b>	32,5
<b>Depth in cm:</b>	10.0 + 2.4 Rain roof
<b>Weight in kg:</b>	6,0
<b>Shipping information:</b>	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).