




Order number: 382XA-VA-3-SP-100-O

Manufacturer: Briefkasten Manufaktur Lippe

ab **€881.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

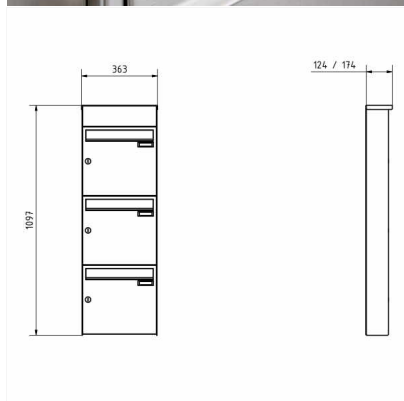

3-compartment Stainless steel surface mailbox Design BASIC Plus 382XA AP with bell box - stainless steel V2A

High-quality surface mailbox for 3 parties made in Germany by Briefkasten Manufaktur.

The mailbox is made entirely of stainless steel V2A, ground. The very high quality workmanship and the sophisticated concept make this mailbox our top seller. A rain drainage edge for optimal water protection, a continuous rubber lip for quiet insertion, the solid interchangeable name plate, a practical mail holding bracket and the very robust lock distinguish this surface-mounted mailbox.

The letterboxes of the BASIC Plus collection are characterized by the consistent use of stainless steel V2A. The result is a very high durability and sustainability. The design has been developed by our own engineers with a view to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

• 3-compartment Surface-mounted mailbox made of weather-resistant stainless steel V2A 1.4301, 240 grain ground

- The letterbox is created at the letterbox manufactory. German quality production "Made in Germany".
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 crosswise, here fit even large letters without bending.
- Insertion flap with noise-damping rubber seal for very quiet insertion of mail.
- The door can be opened from left to right.
- Incl. 2 keys with key number, changeable name plate under the access flap and mail holding bracket per mailbox.
- Large capacity due to optional letterbox depth +50 mm = approx. 17 l. Suitable for companies and households with very large mail volumes.
- Incl. side panel + rain cover made of stainless steel V2A 1.4301, 240 grain ground.

• Bell box made of stainless steel V2A 1.4301, 240 grain polished

- Speech hole with universal adapter. (Intercom system/built-in loudspeaker not included). Optionally also without speech perforation.
- Universal adapter is suitable for all commercially available built-in speakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- Round stainless steel bell push type: Grothe Protect, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- Anti-vandalism - the nameplate is dent-proof and impact-resistant, the plastic is flame-retardant.
- For wall mounting incl. mounting material (screws + dowels). For fence mounting also available without rear perforation (perforation must be provided by customer).

Optional components



The COMELIT video intercom sets are completely pre-wired and programmed by us, so the set is ready for connection. Only 2 wires to connect!

The intercom sets from COMELIT are simply connected with the 2-wire technology. This means that the existing lines can be used and there are no additional costs for laying new lines and plastering or painting work. From the new power supply unit in the meter cabinet, simply lay 2 wires to the built-in loudspeaker in the function box of the letterbox system, as well as 2 wires from the power supply unit to the door station in the apartment. DONE.

- ++ ideal for conversion and renovation, as existing bell lines can be used
- ++ no additional effort for plastering and painting
- ++ low costs due to simple installation
- ++ simple commissioning
- ++ including handicap function at the door
- ++ can be expanded at any time to include handicap-suitable monitors for hearing aid users

Face recognition and voice commands

Integration with Amazon Alexa, available for free via Mini Wi-Fi, is the incredible innovation that led to the creation of the first voice-controlled video intercom. This can also be activated remotely. We already know that with a glance, the phone can be unlocked. Why shouldn't it also be possible to open the gate to the house? Comelit is fully exploiting the potential of the cloud and is the first company in Germany to offer the new facial recognition function: an intuitive and very useful way to manage access to your home via the video intercom.

The functions

- Receive calls from the door station wherever you are.
- To view the recordings of the cameras of your installation (including cameras of the door station).
- To retrieve the video messages of visitors recorded during your absence.
- To call the internal devices of your system (indoor audio and video intercoms).
- To open gates, doors and turn on the lights.
- The APP is based on PUSH notifications; this means considerable energy and data savings, as the APP is only activated when a call is received, and much more.

Video intercom set

• 6741W door station with mobile function

- Color monitor with 4.3" 16/9 screen, hands-free full-duplex and touch-sensitive buttons. Allows brightness, contrast control and adjustment of the strength of the audio signal and ring tone. There are several melodies to choose from to personalize the ringtone. Standard equipment with buttons for door opener, for activation/deactivation of voice connection with corresponding LED indicators. Door station with Wifi interface for simulation of domestic Presence: in combination with the COMELIT app, door calls can be answered from anywhere and doors and gates can be opened. Face recognition for contactless access is possible with the COMELIT app. Dimensions: 160 x 115 x 22 mm (WHT).

• Video speaker 4681 with holder 1250U switch

- Color audio-video unit for 2-wire system, complete with front adjustable LED illuminated color camera. Equipped with terminal block, speech connection with echo cancellation, dustproof and waterproof loudspeaker, electret microphone and loudspeaker volume adjustable at the front. Additional visual and audible programmable handicap indicators. Integrated electronic door opener function (3 A) and additional relay contacts C, NC, NO with 10 A. Dimensions: 102 x 55 x 38 mm (WHT)

• 2-wire power supply 1209

- Power supply unit for 2-wire systems for the supply of the landing station (terminals L1 - L1) and the rising line (terminals L2 - L2). Equipped with a terminal for line termination. Input voltage 110-240 V AC. Note: The power supply does not provide an interface for connecting external lighting such as for nameplates or similar. Dimensions: 106 x 89 x 62 mm (WHT) (6 DIN modules)

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.

Water protection

Mail is protected from moisture and contamination only when it is fully inserted and the flap is closed. In certain extreme weather conditions, water may nevertheless enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	3
Item withdrawal:	Front
Base material:	Stainless steel
Height single box in cm:	33,0
Width single box in cm:	35,5
Volume single box in liters:	12,0 17,0
Height letter slot in cm:	3,5
Width letter slot in cm:	32,5
Height letterbox system in cm:	109,0
Width letterbox system in cm:	35,5
Depth in cm:	10,0 15,0
Weight in kg:	24,0
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).