




**Order number:** 529SST-E-KSDB1100-1


**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€1,411.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users  
with VAT ID and Non-EU countries)

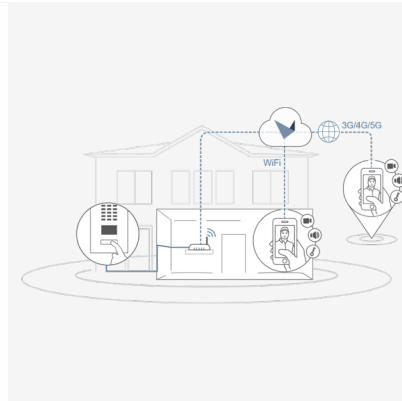

ZEILE 1  
ZEILE 2



#### MONTAGEHILFE

Vor der Montage der hereinbeschriebenen Anlagen folgende Fundamente aus Beton (B20) Maße 400 x 400 mm. Bei kleineren Anlagen wird ein durchgehendes Fundament mit folgenden Maßen benötigt: Anlagenbreite = 400 x 400 mm. Je nach Bodenbeschaffenheit ist das Fundament zu vergrößern. Die Fundamenttiefe sollte mindestens 100 mm betragen, in nach Freigabe im Boden. Die Einbaustärke für die Standelemente sollte 300 mm - 500 mm betragen. Vor Anhub ist es ratsam, einen Sperrplan über dem geplanten Montageort beim zuständigen Amt einzulegen, damit Rohrleitungen, Elektrokanäle usw. nicht beschädigt werden.

Bitte achten Sie vor dem Betonnieren auf das Einziehen der Kabel. Wird die Anlage auf ein Betonfundament aufgeschraubt, müssen dazu Schweißanker (Durchmesser 10 mm) oder gleichwertig verwendet werden.

## Stainless steel video pillar DESIGNER 529S ST-R Elegance I with DoorBird D1100E - RAL of your choice

This simple and at the same time elegant doorbell with DoorBird camera D1100E. The front panel made of stainless steel V2A 1.4301 in your desired color is placed on a 5mm stainless steel frame and stands out slightly in this respect from the stand elements made of polished stainless steel. Integrated DoorBird IP video door station D1100E. The DoorBird IP Video Door Station D1100E is the smart solution for your entrance door. The IP Video Door Station can be operated as a stand-alone unit or integrated into an existing smart home platform. Even existing, classic installations such as a door chime or an electric door and gate opener can continue to be used with DoorBird and controlled via the app using a smartphone and tablet.

Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Door station made of 2 mm stainless steel V2A 1.4301.
- Front panel powder coated in RAL color of your choice.
- Installation box made of 2 mm stainless steel V2A 1.4301, 240 grain ground.
- Dimensions of bell plate W 160 mm x H 320 mm x D 8 mm.
- Dimensions of installation box: W 130 mm x H 290 mm x D 50 mm
- The stand columns are made of 42.4 mm stainless steel, ground. Invisible cable routing through the columns.
- DoorBird IP video door station D1100E and call button (small D11X) installed.

### Important information

#### Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.

#### Water protection

For optimum water protection, the door station should be located under a canopy if possible.

### Abmessungen & Details

<b>Number of parties:</b>	1
<b>Base material:</b>	Stainless steel
<b>Connection technology:</b>	LAN, WLAN
<b>Number of bell buttons:</b>	1
<b>Height in cm:</b>	29,0   32,0
<b>Width in cm:</b>	13,0   16,0
<b>Overall height in cm:</b>	120.0   150.0   170.0 (recommended camera height 140.0 -160.0)
<b>Total width in cm:</b>	29,0
<b>Depth in cm:</b>	5,2
<b>Weight in kg:</b>	4,0
<b>Delivery condition:</b>	Delivery is made in blocks, stand elements/door station divided
<b>Shipping information:</b>	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).