



Order number: S106-KS3V2-VA

Manufacturer: GIRA



ab **€2,164.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

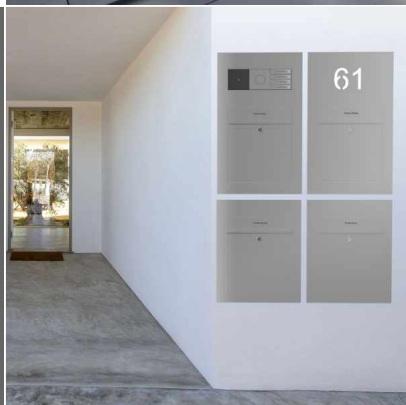

3-compartment Set GIRA System 106 - stainless steel V2A - camera intercom station with 2x bell push button

Gira System 106 made of stainless steel V2A in flush design for use in the DESIGNER letterboxes 3-compartment prepared or for simple surface wall mounting. 3 GIRA system modules and surface-mounted housing are included, so the system can be used directly in the letterbox. The system modules can be replaced at a later date as required thanks to the simple retaining system. The matching GIRA home station and control unit are available under accessories.

Surface-mounted housing 3 compartment Gira System 106 - 5503 910

- For flush mounting of the modules.

Camera module Gira System 106 - 5561 000

- A high-quality camera with high light sensitivity is concealed behind the replaceable black glass pane. Thanks to a detection angle of 100°, the user is always in the picture about what is happening outside his front door.

Gira System 106 call button module - 5539 000

- With 4 start-up buttons for step-by-step installation.
- 2x call button with inscription field 5547920.
- Call button cover 5542920.

Voice module Gira System 106 - 5563 920

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with voltage via the door station module.

Additional components required. See accessories!

- Gira surface-mounted home station video plus 1239xx or Gira surface-mounted home station video 7 1209xx
- Gira control device video REG

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrical installer for planning, installation and wiring.

Water protection

To achieve optimum water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible. Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	2
Base material:	Stainless steel
Connection technology:	2-wire bus technology
Number of bell buttons:	2
Height in cm:	10,6
Width in cm:	32,0
Depth in cm:	2,0