





Order number: 382XU-4-SPS-KSAG106-R-100

Manufacturer: Briefkasten Manufaktur Lippe



ab **€3,015.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

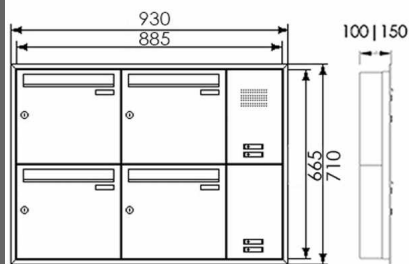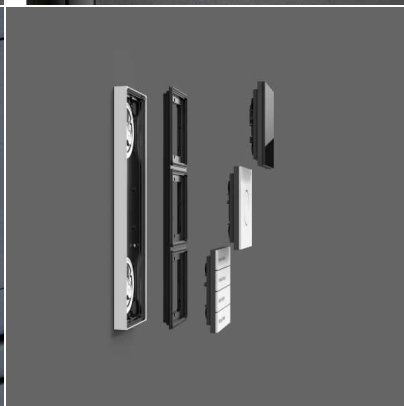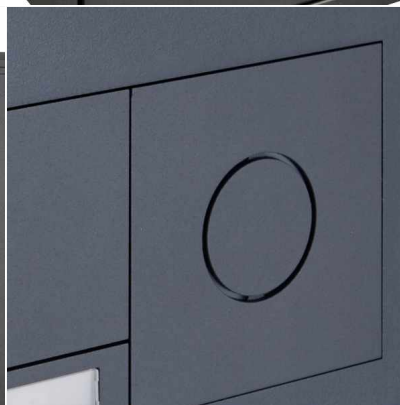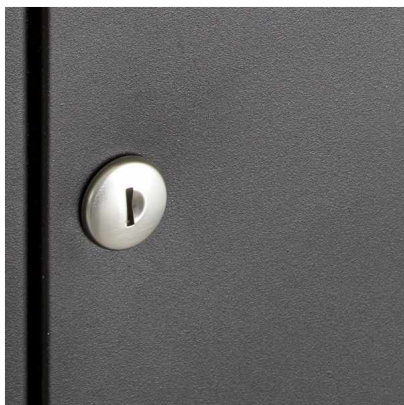

4-compartment Stainless steel flush-mounted letterbox BASIC Plus 382XU UP with GIRA System 106 - AUDIO complete set - RAL of your choice

Modern flush-mounted mailbox for 4 parties - made in Germany by Briefkasten Manufaktur. Seamlessly integrated Gira System 106 in flush-mounted design. 4 GIRA system modules are included, so the letterbox can be used directly. The system modules can be replaced at a later date as required thanks to the simple retaining system. The matching GIRA home stations and the control unit to complete this letterbox are included.

The letterbox is completely made of stainless steel V2A, powder coated in RAL color. The very high quality workmanship and the sophisticated concept make this flush-mounted mailbox our top seller. A rain drainage edge for optimal water protection, a continuous rubber lip for quiet insertion, the solid changeable name plate, a practical mail holding bracket and the very robust lock distinguish this flush-mounted mailbox. The flush-mounted frame made of stainless steel V2A is equipped with a foam rubber seal and guarantees a very high durability.

The letterboxes of the BASIC Plus collection are characterized by the consistent use of stainless steel V2A. The result is a very high durability and sustainability. The design has been developed by our own engineers with a view to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

- **4 compartment flush-mounted letterbox system completely made of stainless steel V2A 1.4301, powder-coated in RAL color**
- The system is made at the Briefkasten Manufaktur. German quality production "Made in Germany".
- The letterboxes comply with DIN/EN 13724. Insert size (3.5 cm x 32.5 cm) for C4 crosswise, here fit even large letters without bending.
- Insertion flap with noise-damping rubber seal for very quiet insertion of mail.
- The door can be opened from left to right.
- Incl. 2 keys with key number, changeable name plate (type 2) under the access flap and mail retainer.
- Large capacity due to optional mailbox depth +50 mm = approx. 17 l. Suitable for companies and households with very large mail volumes.
- **Bell box made of stainless steel V2A 1.4301, powder coated in RAL color fine structure matt**
- Incl. GIRA home station & control unit enclosed, System 106 voice module, info or dummy module & call button module with call buttons, illuminated installed.
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder coated in RAL color.

GIRA

2x surface-mounted housing 2 compartment Gira System 106 - 5502 910

- For flush mounting of the modules.

Info module Gira System 106 - 5560 920, flush-mounted

- For house numbers that are to be prominently displayed.

Voice module Gira System 106 - 5563 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with voltage via the door station module.

Call button module Gira System 106 - 5539 000

- With 4 start-up buttons for step-by-step mounting.
- 4x call button with inscription field 5547920.

Surface-mounted home station Gira 1250XX, enclosed

- Completely pre-assembled surface-mounted home station, thus quick and clean installation.
- Design diversity through integration in the switch range, thus uniform appearance of door communication and electrical installation.
- Mounting both with and without cover frame.
- Simple installation due to plug-in screw terminals on the mounting plate. Contacting to the home station takes place when the home station is plugged onto the mounting plate.
- Simple disassembly of the home station during renovation work.
- Fixing holes for mounting.
- Signal transmission and supply of the home station via reverse polarity protected and short-circuit proof 2-wire bus.
- Parallel connection of up to three home stations possible (with power supply via 2-wire bus).
- One-man commissioning thanks to simple commissioning procedure.
- Call tone differentiation between door call, internal call and floor call.
- Selection of five different ringing tone melodies, which can be individually assigned to individual call buttons.
- Hands-free function (voice-controlled intercom with echo and background noise suppression).
- Assertion function in case of loud ambient noise during voice communication.
- Privacy lock.
- Operating buttons with integrated LEDs for status display.

Control device audio REG Gira 128700, enclosed

- Supply of the reverse polarity protected and short-circuit proof 2-wire bus.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door strike programming.
- AC 12 V output for powering a standard electric strike.
- Permanent AC 12 V output for supplying power to a TKS-TK gateway.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your local electrician for planning, mounting and installation.

Water protection

To achieve optimum water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	4
Item withdrawal:	Front
Base material:	Stainless steel
Height single box in cm:	33,0
Width single box in cm:	35,5
Volume single box in liters:	12,0 17,0
Height letter slot in cm:	3,5
Width letter slot in cm:	32,5
Height letterbox system in cm:	71,0
Width letterbox system in cm:	93,0
Depth in cm:	10,0 15,0
Weight in kg:	34,0
Delivery condition:	Delivery is completely assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.