






Order number: 599BPK-VAR-KSVG1106-R

Manufacturer: Briefkasten Manufaktur Lippe

ab **€7,899.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users
with VAT ID and Non-EU countries)

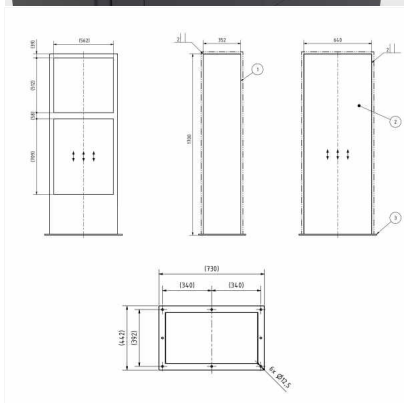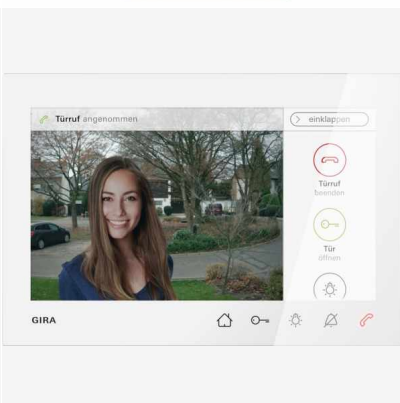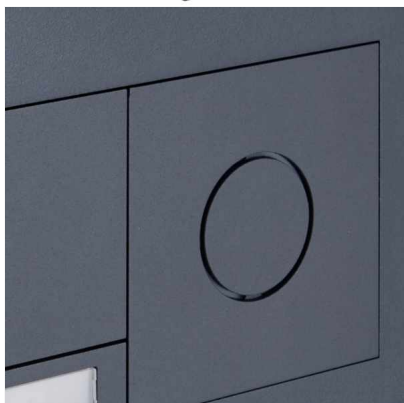

Stainless steel mailbox package column Designer BIG - RAL of your choice - GIRA System 106 - video intercom - VIDEO complete set

Modern stainless steel column made of 2 mm stainless steel V2A 1.4301, powder coated in RAL color of your choice. The column is fully welded, so no rivets or screws are visible. The letterbox module and the parcel box module are also inserted into the pillar with invisible screws. The letterbox and parcel box modules are also made of 2mm stainless steel V2A 1.4301, powder-coated in RAL color and can be exchanged for new modules even after many years. Seamlessly integrated Gira System 106 in flush design. 3 GIRA system modules are included, so the letterbox can be used directly. The matching GIRA home station and the control unit to complete this letterbox are included. The modules can be subsequently replaced as desired due to the simple holding system. This letterbox stele with parcel box is manufactured at Briefkasten Manufaktur. Made in Germany, Bad Salzuffen.

Parcel reception independent of the delivery person! Every parcel deliverer (e.g. DHL, UPS, DPD, TNT, GLS, Hermes, etc.) can use this parcel box.

Mailbox module made of 2mm stainless steel V2A 1.4301, powder coated in RAL of your choice

- Front mail removal door 350 mm x 300 mm, to open from top to bottom. Incl. 2 keys with key number.
- Mail slot from front, dimensions of slot: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending.
- Drop flap with built-in damping elements, these let the drop flap close slowly and quietly.

Parcel box module made of 2mm stainless steel V2A 1.4301, powder coated in RAL of your choice

- Volume parcel box: 130 liters, Max. Parcel size: 540 x 690 x 340 mm (WHT). Ideal for large parcels, suitable for one-time use until the next emptying.
- Front mail removal door 510 mm x 660 mm, to open from left to right. Incl. 5 keys with key number.
- The parcel removal door is equipped with high quality stainless steel hinges for extremely long durability.
- Innovative package lock with snap-in latch.
- High quality stainless steel laser inscription "PAKET".
- The letterbox and parcel box modules of this pillar can also be replaced later, so you always remain flexible.

The fully welded column is made of 2 mm stainless steel V2A 1.4301, powder coated in RAL color

- Overall height is 1.70 m.
- Invisible cable feed through the body is possible.
- The pillar is equipped with a base plate made of VA. This is 10 mm thick and is finished with a cover plate. Thus the fastening dowels are concealed.
- Optionally with house number, lasered.
- Incl. GIRA home station & control unit enclosed, System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without wiring

- A high-quality camera with high light sensitivity is concealed behind the replaceable black glass pane. Thanks to a detection angle of 100°, the user is always in the picture about what is happening outside his front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that need to be clearly visible.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with voltage via the door station module.

Home station Gira video surface-mounted 7 1209xx, enclosed

- Video home station with a 17.78 cm (7") TFT color display and convenient hands-free function for surface mounting or wall mounting with flush-mounted device box or cavity wall box. With the optional stand (see accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

[Further information](#)

Control device video REG Gira 128800, enclosed

- Control device for supplying the audio and video components of the Gira door communication bus.
- Supply of the reverse polarity protected and short-circuit proof 2-wire bus when using video components such as color camera, TFT color display.
- Up to 2 door stations with color camera and 28 home stations with TFT color display can be supplied via the video control device.
- A total of up to 15 color cameras can be controlled by the video control device (5 door stations video and 10 TKS camera gateways), of which two door stations with color camera can be supplied with voltage by the video control device. The other color cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door strike programming.
- AC 12 V output for powering a standard electric strike.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

[Further information](#)

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your local electrician for planning, installation and wiring.

Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1cm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Connection technology:	2-wire bus technology
Height single box in cm:	BK 51.0 55.0 - PK 71.0 75.0
Width single box in cm:	BK 56.0 60.0 - PK 56.0 60.0
Volume single box in liters:	BK 31.0 PK 130.0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Overall height in cm:	170,0
Total width in cm:	64.0 (footplate 73.0)
Depth in cm:	35.2 (footplate 44.2)
Weight in kg:	95,0
Delivery condition:	Delivery is assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.