





Order number: 599BPK-VAR-R

Note: After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.

Manufacturer: Briefkasten Manufaktur Lippe

ab **€4,619.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

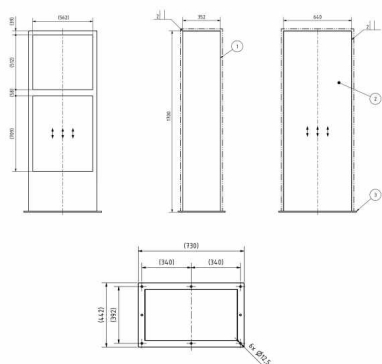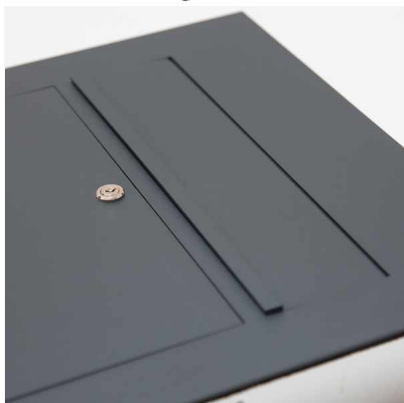

Stainless steel parcel stele with letter box Designer BIG - RAL of your choice - optionally with a camera and installation speaker

Modern stainless steel column made of 2 mm stainless steel V2A 1,4301, powder-coated in RAL color of your choice. The column is fully welded, which means that no rivets or screws are visible. The mailbox module and the parcel module are also inserted into the stele with invisible screw connection. The mailbox and parcel modules are also made of 2mm stainless steel V2A 1,4301, powder-coated in RAL color and can still be exchanged for new modules after many years. High-quality manufactured letterbox column of the brand Briefkasten Manufaktur. Made in Germany, Bad Salzuffen.

Delivery-independent package reception! Each parcel deliverer (e.g. DHL, UPS, DPD, TNT, GLS, Hermes, or similar) can use this parcel box.

- **mailbox module made of 2mm stainless steel V2A 1,4301, powder-coated in Ral after election**
- Fronts side post-withdrawal door 350 mm x 300 mm, to open from top to bottom. Including 2 key with key number.
- Settling from the front, dimensions of the insertion: W 35 cm x H 6.3 cm, C4 across. Here, very large letters fit without kinking.
- throw-in flap with built-in damping elements, which let the throw-in flap slowly and quietly close.
- optionally interchangeable name tag made of stainless steel with laser lettering or name tag made of plexi.
- optionally with a house number in polished optics (67mm high), set off or illuminated house number.
- 8-12V DC Kurzhub bell button with LED ring lighting (blue, white, red or green). The lighting of the bell button cannot be supplied by the control unit. It must be connected to an additional power supply 8-12 V DC.
- Optional is an 8-12V DC short-lived light button with pictogram.
- Preparation (installation speaker not included) for intercom.
- Optional with universal adapter for all commercially available installation speakers.
- Optional preparation (not included in the scope of delivery) for a camera.
- **Package box module made of 2mm stainless steel V2A 1,4301, powder-coated in RAL of election**
- Volume package-part: 130 liters, max. Package size: 540 x 690 x 340 mm (BHT). Ideal for large packages, suitable for one-time occupancy up to the next emptying.
- Fronts side post-withdrawal door 510 mm x 660 mm, to open from left to right. Including 5 key with key number.
- The parcel with high-quality stainless steel hinges is equipped for extremely long durability.
- Innovative packet lock with snap lock.
- High-quality stainless steel laser lettering "Package".
- The mailbox and parcel box modules of this stele can be exchanged later, so they always remain flexible.
- **The fully welded stand column consists of 2 mm stainless steel V2A 1.4301, powder-coated in RAL color**
- height is 1.70 m.
- Invisible cable supply possible by the corpus.
- The stele is equipped with a fus plate made of VA. This is 10 mm thick and is refined with a cover panel. This is how the fastening dowels are covered.

important information

camera or voice center preparation

The speaking systems are to be connected by an electrical installer. Contact the electrical installer you trust in the planning, installation and installation.

water protection

In order to achieve optimal water protection of your post, the mailbox or the mailbox system should be under a canopy if possible. The post office is only protected from water if it is completely stored in the box and the throw-in flap is closed. Unskinned mail enables the penetration of moisture and dirt into the mailbox. It is therefore necessary to plan sufficiently dimensioned mailboxes for the upcoming need. In certain extreme weather conditions, water can still occur (according to DIN EN 13724 to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Height single box in cm:	BK 51.0 55.0 - PK 71.0 75.0
Width single box in cm:	BK 56.0 60.0 - PK 56.0 60.0
Volume single box in liters:	BK 31.0 PK 130.0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Overall height in cm:	170,0
Total width in cm:	64.0 (footplate 73.0)
Depth in cm:	35.2 (footplate 44.2)
Weight in kg:	95,0
Delivery condition:	Delivery is assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.