




Order number: 382XA-VA-4W-SP-100-R

Manufacturer: Briefkasten Manufaktur Lippe

ab **€1,281.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

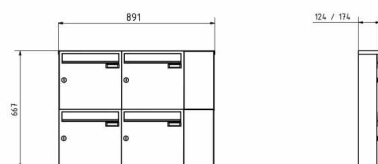

4-compartment Stainless steel surface mailbox BASIC Plus 382X AP with bell box on the side

German quality production "Made in Germany" by Briefkasten Manufaktur. The complete 3-compartment surface mailbox is made of weather-resistant stainless steel V2A, ground. A rain drainage edge for optimum water protection, a double-edged access flap with rubber buffer, the solid changeable name plate, a practical mail holding bracket and the very robust lock distinguish this stainless steel mailbox.

The letterboxes of the BASIC Plus collection are characterized by the consistent use of stainless steel V2A. The result is a very high durability and sustainability. The construction has been developed by our own engineers with regard to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

• **4-compartment Surface-mounted letterbox made of high-quality, weather-resistant stainless steel V2 A 1.4301, polished**

• The letterbox complies with DIN/EN 13724. Insert size (3.5 cm x 32.5 cm) for C4 crosswise, large letters also fit in here without bending.

• Insertion flap with noise-dampening rubber buffers for very quiet insertion of mail.

• The door can be opened from left to right.

• Incl. 2 keys with key number, changeable name plate under the access flap and mail retaining bracket.

• Large capacity due to optional mailbox depth +50 mm = approx. 17 l. Suitable for companies and households with very large mail volumes.

• **Bell box made of stainless steel V2A 1.4301, grinded**

• Speech perforation with universal adapter. (Intercom system/built-in loudspeaker not included). Optionally also without speech perforation.

• Universal adapter is suitable for all commercially available built-in speakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).

• Round stainless steel bell push type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).

• Anti-vandalism - the nameplate is dent-proof and impact-resistant, the plastic is flame-retardant.

• Incl. close-fitting side panel+rain cover made of stainless steel V2A, ground.

• For wall mounting incl. mounting material.

Important information

Camera or intercom preparation

The intercom systems are to be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.

Water protection

Mail is protected from moisture and contamination only when it is fully inserted and the flap is closed. In certain extreme weather conditions, water may nevertheless enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

| | |
|--------------------------------|-----------------|
| Number of parties: | 4 |
| Item withdrawal: | Front |
| Base material: | Stainless steel |
| Height single box in cm: | 33,0 |
| Width single box in cm: | 35,5 |
| Volume single box in liters: | 12,0 17,0 |
| Height letter slot in cm: | 3,5 |
| Width letter slot in cm: | 32,5 |
| Height letterbox system in cm: | 66,0 |
| Width letterbox system in cm: | 88,0 |
| Depth in cm: | 10,0 15,0 |
| Weight in kg: | 12,0 |

Shipping information: Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).