





**Order number:** 529SST-E-KSCSA-1

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€1,257.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users  
with VAT ID and Non-EU countries)

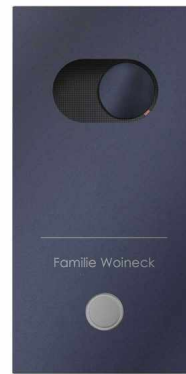

**MONTAGEHILFE**

Bitte schneiden Sie bei freistehenden Anlagen folgende Fundamente aus Beton (B20). Maße von Deckplatte 400 x 400 mm. Bei freistehenden Anlagen wird ein durchgehendes Fundament mit folgenden Maßen benötigt: Anlagenbreite = 400 x 400 mm. Je nach Bodenbeschaffenheit ist das Fundament zu vergrößern. Die Fundamentbreite sollte mindestens 100 mm betragen, in nach Freigabe im Boden. Die Einbaustärke für die Deckplatte sollte 300 mm - 500 mm betragen. Vor Aushub ist es ratsam, einen Sperrstempel über den geplanten Montageort beim zuständigen Amt einzulegen, damit Rohrleitungen, Elektrokanäle usw. nicht beschädigt werden.

Bitte achten Sie vor dem Betonnieren auf das Einziehen der Kabel. Wird die Anlage auf ein Betonfundament aufgeschraubt, müssen dazu Schweißanker (Durchmesser 10 mm) oder gleichwertig verwendet werden.

## Doorbell freestanding DESIGNER 529S ST-R Elegance I - RAL of your choice - Comelit AUDIO Komplettsset

This simple and at the same time elegant doorbell pedestal has a built-in Comelit door intercom system including home station. The front panel made of stainless steel V2A 1.4301 in your desired color is placed on a 5mm stainless steel frame and stands out slightly in this respect from stand elements made of polished stainless steel.

Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Door station made of 2 mm stainless steel V2A 1.4301.
- Front panel powder coated in RAL color of your choice.
- Installation box made of 2 mm stainless steel V2A 1.4301, 240 grain ground.
- Dimensions of bell plate W 160 mm x H 320 mm x D 8 mm.
- Dimensions of installation box: W 130 mm x H 290 mm x D 50 mm
- 8-12V DC short-stroke bell pushbutton with LED ring illumination in white.
- Incl. Comelit audio speaker 1621 with holder 1250U switch, 2-wire power supply 1210 and audio home station 6750W.
- The pedestals are made of 42.4 mm stainless steel, polished. Invisible cable routing through the columns.

### Important information

#### Camera or intercom preparation

**The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.**

#### Water protection

For optimum water protection, the door station should be located under a canopy if possible.

### Abmessungen & Details

<b>Number of parties:</b>	1
<b>Base material:</b>	Stainless steel
<b>Connection technology:</b>	2-wire bus technology
<b>Number of bell buttons:</b>	1
<b>Height in cm:</b>	29,0   32,0
<b>Width in cm:</b>	13,0   16,0
<b>Overall height in cm:</b>	120,0   150,0   170,0
<b>Total width in cm:</b>	29,0
<b>Depth in cm:</b>	5,2
<b>Weight in kg:</b>	4,0
<b>Delivery condition:</b>	Delivery is made in blocks, stand elements/door station divided
<b>Shipping information:</b>	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).