




**Order number:** 382XAZ-2W-SP-O

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€1,133.00** \*

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

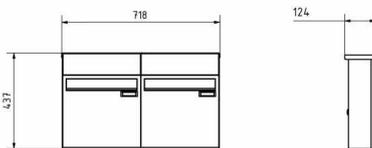

## 2-compartment 1x2 stainless steel fence mailbox BASIC Plus 382XZ with bell box - RAL of your choice - removal on the back side

High-quality manufactured fence mailbox with bell box for intercom (optional camera) from the Mailbox Manufacture. The insertion is made on the front side, the residents can remove the mail from the back. The mailbox can be attached to your fence using the optional rod mat attachment, if this is not chosen, the mailbox should be fitted and perforated by your fence builder on site. The complete fence mailbox is made of weather-resistant stainless steel V2A 1.4301, powder-coated in RAL of your choice. A rain drainage edge for optimal water protection, an insertion flap with rubber buffer, the solid changeable name plate, a practical mail holding bracket and the very robust lock characterize this stainless steel mailbox.

The letterboxes of the BASIC Plus collection are characterized by the consistent use of stainless steel V2A. The result is a very high durability and sustainability. The construction has been developed by our own engineers with regard to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

### • 2x fence mailbox made of stainless steel V2A 1.4301, powder coated in RAL color

- The system is made at Briefkasten Manufaktur. German quality production "Made in Germany".
- The mailboxes comply with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 crosswise, here fit even large letters without bending.
- Insertion flaps with noise-damping rubber seal for very quiet insertion of mail.
- The doors can be opened from left to right.
- Incl. 2 keys with key number, changeable name plate (type 2) under the access flap and mail holding bracket per party.
- Incl. side panel + rain roof made of stainless steel V2A, powder coated in RAL color.
- **Speech bell part made of stainless steel V2A, powder coated in RAL color**
- Speech perforation with universal adapter. (Intercom system / built-in loudspeaker not included in delivery). Optionally also available without speech perforation.
- Universal adapter is suitable for all commercially available built-in speakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- Round stainless steel bell push type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- Anti-vandalism - the nameplate is dent-proof and impact-resistant, the plastic is flame-retardant.
- Suitable for fence mounting, mounting holes must be provided by customer. Optionally with bar mat holder.

### Important information

#### Camera or intercom preparation

**Intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.**

#### Water protection

Mail is protected from moisture and contamination only when it is fully inserted and the flap is closed. In certain extreme weather conditions, water may nevertheless enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

<b>Number of parties:</b>	2
<b>Item withdrawal:</b>	Back
<b>Base material:</b>	Stainless steel
<b>Height single box in cm:</b>	33,0
<b>Width single box in cm:</b>	35,5
<b>Volume single box in liters:</b>	12,0
<b>Height letter slot in cm:</b>	3,5
<b>Width letter slot in cm:</b>	32,5
<b>Height letterbox system in cm:</b>	43,0
<b>Width letterbox system in cm:</b>	71.0 + 0.8 Cladding
<b>Depth in cm:</b>	10.0 + 2.4 Rain roof
<b>Weight in kg:</b>	12,0

**Shipping information:** Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).