



**Order number:** 608-R-KSBJ180-R

**Note:** After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.


**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€6,839.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)



Eingebaute Dämpfungselemente lassen die Einwurfsklappe langsam und leise schließen

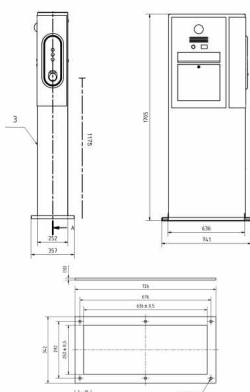

### Stainless steel mailbox column designer BIG EDGE - RAL of your choice - Busch-Jaeger VIDEO complete set

High-quality manufactured mailbox column of the brand Briefkasten Manufaktur with door communication on the side. Clear line, no-frills design and high-quality materials characterize the 3mm stainless steel mailbox column of the DESIGNER collection. The mailbox column is welded by hand, so that no screw connections, hairline joints or gaps are visible in the area of the body. The revision door at the back allows easy assembly, as well as subsequent work for e.g. repairs or for regular inspection, without any problems. Equipped with a high-quality lock, the inspection door is protected against vandalism. Integrated Busch-Jaeger VIDEO complete set for every type of building the optimal door communication. With the three optional access control modules transponder, keypad and fingerprint Busch-Jaeger presents an interesting solution for residential or functional buildings. Completely pre-programmed for easy installation - connect 2 wires and DONE!

Handmade in the letterbox manufactory of stainless steel V2A 1.4301, powder coated as free-standing letterbox. A real eye-catcher among the mailboxes, this system makes everywhere a good figure. Clear line and no-frills design distinguish the designer mailbox steles. Our products have a high value, reliable functionality and their own identity.

- Letterbox pillar with lateral door communication made of 3mm stainless steel V2A 1.4301, powder coated in RAL color.
- Quality manufacturing - Made in Germany - Briefkasten Manufaktur Lippe.
- Rear inspection flap W 250 mm x H 700 mm incl. 2 keys.
- The mailbox module is made of 2mm stainless steel V2A 1.4301, powder coated in RAL color.
- Front side mail removal door W 350 mm x H 300 mm.
- Mail slot from the front, slot size suitable for C4 landscape (BH 350mm x 63mm).
- With built-in damping elements, these allow the insertion flap to close slowly and quietly.
- 8-12V DC short stroke bell push button with LED ring illumination (blue, white, red or green).
- Optional 8-12V DC short travel light button with pictogram.
- Optional replaceable nameplate made of stainless steel with laser inscription or nameplate made of plexi.
- House number, backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0.1-4W for LED illumination of the house number.
- The fully welded mailbox column is made of 3mm stainless steel V2A 1.4301, powder coated. Construction height is 1.70m.
- The pillar is equipped with a base plate made of VA. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body is possible.
- The pedestals are equipped with modules that can be replaced later.
- Optional Busch-Jaeger access control modules transponder, keypad or fingerprint incl. video distributor outdoor 83325/2 possible (bell transformer/switch actuator door/light not included).
- Incl. Busch-Jaeger camera module 180 - 83503 installed, built-in audio module - 83110-101 installed, as well as system central unit - 83300 enclosed, indoor station video 7" enclosed.



#### Camera module 180 - 83503

The camera module with 170° viewing angle covers almost the entire area in front of and next to the entrance. With the rotary switch on the back of the module, the desired viewing angle can be set. In addition, the toggle switch on the Toggle switch on the back of the unit can be used to activate or deactivate the snapshot can be activated or deactivated.

- Video camera with automatic day/night switching and infrared LEDs to illuminate night shots.
- Built-in heater to keep the lens fog-free.
- Angle of coverage horizontal/vertical: 170°/135°

#### Built-in audio module - 83110-101

The built-in audio module serves as a speech and reception unit for installation in suitable door and mailbox systems.

- Built-in relay for actuating the door opener.
- 8 inputs for connecting the bell push buttons.
- Voice volume adjustable.

#### System control unit - 83300

Supply and control unit of the Busch-Welcome® system.

- For connecting the indoor and outdoor bus.
- For connecting an electric door opener (12 V~, 1.6 A or potential-free output 30 V, 3 A).
- For switching the light or connecting a light relay (230 V, 3 A).
- Switching time door opener or light adjustable.
- Use high-impedance door openers. Nominal resistance min. 20 Ohm.

#### Indoor station video 4.3" WLAN white surface mount or indoor station video 7" - M22381-X-XX

#### Important information

##### Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.

##### Water protection

To achieve optimum water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible.

Mail is only protected from water when it is completely deposited in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

#### Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Connection technology:	2-wire bus technology
Height single box in cm:	71,0   75,0
Width single box in cm:	41,0   45,0
Volume single box in liters:	31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Overall height in cm:	170,0
Total width in cm:	63.6 (footplate 74.0)
Depth in cm:	25.2 (footplate 36.0)
Weight in kg:	95,0
Delivery condition:	Delivery is assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.