





**Order number:** 608-R-KSVGI106-R

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€6,869.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users  
with VAT ID and Non-EU countries)

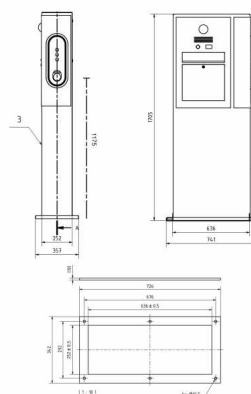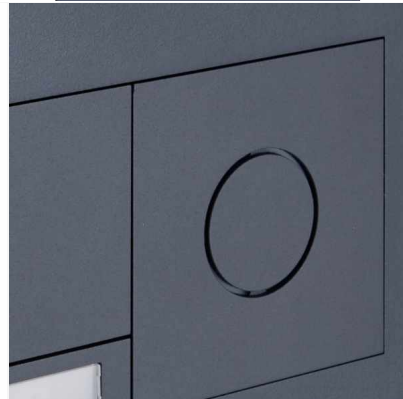

## Stainless steel mailbox column designer BIG EDGE - RAL of your choice - GIRA System 106 - video intercom - VIDEO complete set

High-quality manufactured mailbox column of the brand Briefkasten Manufaktur with lateral door communication. Clear lines, no-frills design and high-quality materials characterize the 3mm stainless steel mailbox column of the DESIGNER collection. The mailbox column is welded by hand, so that no screw connections, hairline joints or gaps are visible in the area of the body. The revision door at the back allows easy assembly, as well as subsequent work for e.g. repairs or for regular inspection, without any problems. Equipped with a high-quality lock, the inspection door is protected against vandalism. Seamlessly integrated Gira System 106 in flush-mounted design. 3 GIRA system modules are included, so the letterbox can be used directly. The matching GIRA home station and control unit to complete this letterbox are included. The modules can be subsequently replaced as desired due to the simple holding system.

Handmade in the letterbox manufactory from stainless steel V2A 1.4301, powder coated as free-standing letterbox. A real eye-catcher among the mailboxes, this system makes everywhere a good figure. Clear line and no-frills design distinguish the designer mailbox steels. Our products have a high value, reliable functionality and their own identity.

- Letterbox pillar with lateral door communication made of 3mm stainless steel V2A 1.4301, powder coated in RAL color.
- Quality manufacturing - Made in Germany - Briefkasten Manufaktur Lippe.
- Rear inspection flap W 250 mm x H 700 mm incl. 2 keys.
- The mailbox module is made of 2mm stainless steel V2A 1.4301, powder coated in RAL color.
- Front side mail removal door W 350 mm x H 300 mm.
- Mail slot from the front, slot size suitable for C4 landscape (BH 350mm x 63mm).
- With built-in damping elements, these allow the insertion flap to close slowly and quietly.
- House number, backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0.1-4W for the LED lighting of the house number.
- The fully welded mailbox column is made of 3mm stainless steel V2A 1.4301, powder coated. Construction height is 1.70m.
- The pillar is equipped with a base plate made of VA. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body is possible.
- The pedestals are equipped with modules that can be replaced later.
- Incl. GIRA home station & control unit enclosed, System 106 door station module, info module & camera module installed.

## GIRA

### Camera module Gira System 106 - 5561 000, installed without cabling

- A high-quality camera with high light sensitivity is concealed behind the replaceable black glass pane. Thanks to a detection angle of 100°, the user is always in the picture about what is happening outside his front door.

### Info module Gira System 106 - 5560 920, installed

- For house numbers that need to be clearly visible.

### Door station module Gira System 106 - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with voltage via the door station module.

### Home station Gira video surface-mounted 7 1209xx, enclosed

- Video home station with a 17.78 cm (7") TFT color display and convenient hands-free function for surface mounting or wall mounting with flush-mounted device box or cavity wall box. With the optional stand (see accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

• [Further information](#)

### Control device video REG Gira 128800, enclosed

- Control device for supplying the audio and video components of the Gira door communication bus.
- Supply of the reverse polarity protected and short-circuit proof 2-wire bus when using video components such as color camera, TFT color display.
- Up to 2 door stations with color camera and 28 home stations with TFT color display can be supplied via the video control device.
- A total of up to 15 color cameras can be controlled by the video control device (5 door stations video and 10 TKS camera gateways), of which two door stations with color camera can be supplied with voltage by the video control device. The other color cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door strike programming.
- AC 12 V output for powering a standard electric strike.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

• [Further information](#)

### Important information

#### Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your local electrician for planning, installation and wiring.

#### Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox.

Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Connection technology:	2-wire bus technology
Height single box in cm:	71,0   75,0
Width single box in cm:	41,0   45,0
Volume single box in liters:	31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Overall height in cm:	170,0
Total width in cm:	63.6 (footplate 74.0)
Depth in cm:	25.2 (footplate 36.0)
Weight in kg:	95,0
Delivery condition:	Delivery is assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.