





Order number: 515B-KSBJ180-UP100

Note: After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.



Manufacturer: Briefkasten Manufaktur Lippe

ab **€4,409.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

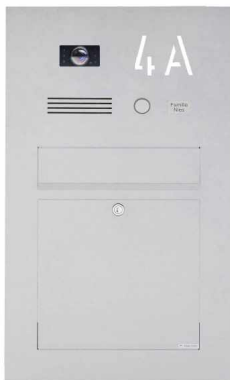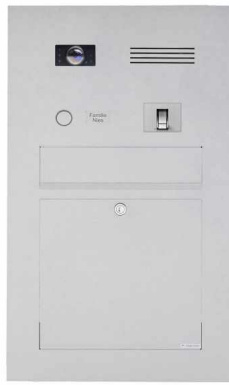

Alle Angaben unter Vorbehalt von technischen Änderungen in mm. Maßtoleranzen möglich +/- 2mm.

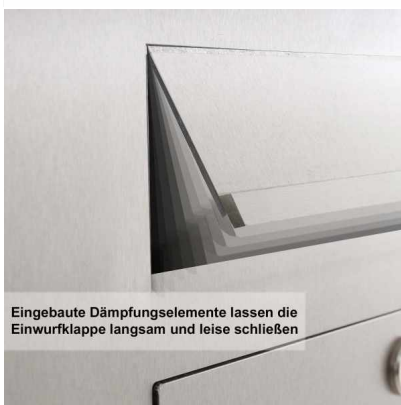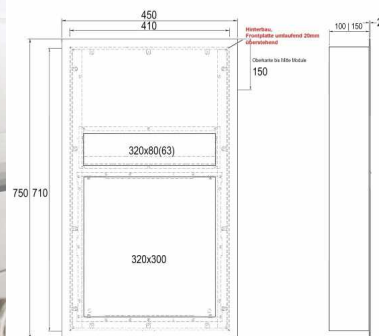

Eingebaute Dämpfungselemente lassen die Einwurflappe langsam und leise schließen

Stainless steel mailbox designer BIG - Busch-Jaeger VIDEO complete set

High-quality manufactured letterbox of the brand Briefkasten Manufaktur in extra large format. Integrated Busch-Jaeger VIDEO complete set for any type of building the optimal door communication. With the three optional access control modules transponder, keypad and fingerprint Busch-Jaeger presents an interesting solution for residential or functional buildings. Completely pre-programmed for easy installation - connect 2 wires and DONE!

This is a real eye-catcher among the letterboxes. Clean lines and sleek design characterize the designer mailbox with Busch Jaeger camera 180. Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Designer stainless steel mailbox with front panel made of 2 mm stainless steel V2A, 240 grain ground.
- Front mail removal door 350 mm x 300 mm, to open from top to bottom. Incl. 2 keys with key number.
- Mail slot from the front, dimensions of slot: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending. Attention no removal protection!
- With built-in damping elements, these let the insertion flap close slowly and quietly.
- 8-12V DC short stroke bell pushbutton with LED ring illumination (blue, white, red or green).
- Optional 8-12V DC short stroke light button with pictogram.
- Optional house number approx. 70mm high (max. 3 digits) with power saving LED illumination 12V DC approx. 50mA / 1W, white.
- Dimensions flush-mounted or surface-mounted box: H 710 mm x W 410 x D 100 | 150 mm. ATTENTION: The front panel of the surface-mounted box also protrudes by 2 cm.
- Plaster box made of galvanized steel. Surface box made of stainless steel V2A, ground on all sides without visible screw connection.
- Plaster box with pre-punched cable inlets on all sides.
- Optional Busch Jäger access control modules transponder, keypad or fingerprint incl. video distributor outdoor 83325/2 possible (bell transformer/switch actuator door/light not included).
- Incl. Busch-Jaeger camera module 180 - 83503 installed, built-in audio module - 83110-101 installed, as well as system central unit - 83300 enclosed, indoor station video 7" enclosed.



Camera module 180 - 83503

The camera module with 170° viewing angle covers almost the entire area in front of and next to the entrance. With the rotary switch on the back of the module, the desired viewing angle can be set. In addition, the toggle switch on the Toggle switch on the back of the unit can be used to activate or deactivate the snapshot can be activated or deactivated.

- Video camera with automatic day/night switching and infrared LEDs to illuminate night shots.
- Built-in heater to keep the lens fog-free.
- Angle of coverage horizontal/vertical: 170°/135°

Built-in audio module - 83110-101

The built-in audio module serves as a speech and reception unit for installation in suitable door and mailbox systems.

- Built-in relay for actuating the door opener.
- 8 inputs for connecting the bell push buttons.
- Voice volume adjustable.

System control unit - 83300

Supply and control unit of the Busch-Welcome® system.

- For connecting the indoor and outdoor bus.
- For connecting an electric door opener (12 V~, 1.6 A or potential-free output 30 V, 3 A).
- For switching the light or connecting a light relay (230 V, 3 A).
- Switching time door opener or light adjustable.
- Use high-impedance door openers. Nominal resistance min. 20 Ohm.

Indoor station video 4.3" WLAN white surface mount or indoor station video 7" - M22381-X-XX

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.

Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely deposited in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Connection technology:	2-wire bus technology
Height single box in cm:	71,0 75,0
Width single box in cm:	41,0 45,0
Volume single box in liters:	21,0 31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Depth in cm:	10,0 15,0
Weight in kg:	32,0
Delivery condition:	Delivery is assembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).