






**Order number:** 870862B-VAR-1-IND-R

**Note:** After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€4,469.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

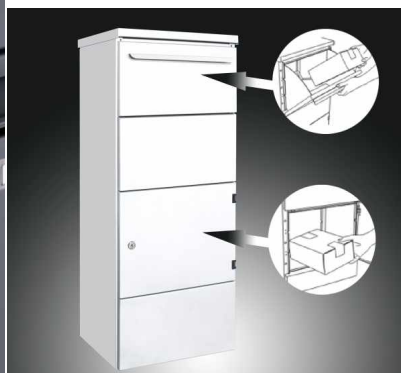

## Parcel post box freestanding BASIC 870862B ST-P - RAL of your choice - 1 party - INDIVIDUAL

High-quality manufactured mailbox system with bell pillar made of stainless steel V2A, powder coated of the brand Briefkasten Manufaktur. Wahleise can be prepared a speech hole, camera and house number. Parcel reception independent of the delivery person! Every parcel deliverer (e.g. DHL, DPD, TNT, GLS, Hermes, etc.) can use this parcel mailbox. Sample garage contracts enclosed!

This parcel mailbox is a classic and robust model for multiple parcel reception, which is available in different colors. Receiving multiple parcels is easily possible due to the lock system. The mailbox is made of galvanized steel, powder painted in RAL color, the standing elements are made of weather-resistant stainless steel V2A, ground. The very high quality workmanship and the sophisticated concept make this mailbox system our top seller. A rain drainage edge for optimal water protection, an insertion flap with rubber lip, the solid change name plate and the robust lock distinguish this free-standing letterbox. This mailbox is easy to clean and insensitive.

- **1 party free-standing letterbox as a parcel mailbox powder-coated in RAL color of your choice**
- The system is created at the letterbox manufactory. German quality manufacturing "Made in Germany".
- Parcel compartment with lock system made of galvanized sheet steel, powder coated.
- Volume parcel compartment: 56 liters, parcels with maximum dimensions of 355 x 155 x 370 mm fit into the parcel mailbox. This corresponds to parcel size M.
- Quiet opening and closing of the parcel flap by means of a damper.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.5 cm) for C4 crosswise, here fit even large letters without bending.
- Insertion flaps with noise-damping rubber seal for very quiet insertion of mail.
- The doors can be opened from left to right.
- Incl. 2 keys with key number and 2-piece stainless steel nameplate (not labeled) under the flap.
- The removal of mail and parcels is done from the front.
- Straight roof for optimal water protection.
- The stand element consists of W 20 mm x D 100 mm stainless steel V2A 1.4301, powder coated for screw mounting.
- **Bell pillar made of 1.5 mm stainless steel V2A 1.4301, powder-coated**
- The speaking part is made of 2mm stainless steel V2A 1.4301, powder coated. Dimensions: W 190 mm x H 640 mm x D 110 mm.
- House number approx. 70mm high (max. 3 digits) with power-saving LED illumination 12V DC approx. 50mA / 1W, white.
- Exchangeable nameplate made of plexiglass, optionally illuminated.
- The inscriptions of the name plates can be exchanged from the front as desired.
- Incl. EVN LED power supply / transformer IP65 12V/DC 0,1-4W for the LED illumination (house number and name plate if selected).
- 1x round stainless steel bell push button type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- Preparation (built-in speaker not included) for intercom possible.
- Optional universal adapter for all commercially available built-in speakers.
- Optional preparation (camera not included) for a camera.
- Incl. 6x screws cover caps made of stainless steel V2A, ground, so that the screws for fixing the front panel are not visible. See pictures.
- The fully welded column is made of 1,5mm stainless steel V2A 1.4301, powder coated. Construction height is either 1.30 m or 1.60 m.
- The column is equipped with a base plate made of VA. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body is possible.

### Important information

#### Water protection

In order to achieve optimal water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible. Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

<b>Number of parties:</b>	1
<b>Item withdrawal:</b>	Front
<b>Base material:</b>	Stainless steel, Steel galvanized
<b>Height single box in cm:</b>	BK 16.5   PK 100.0
<b>Width single box in cm:</b>	BK 41.0   PK 41.0
<b>Volume single box in liters:</b>	BK 25.0   PK 56.0
<b>Height letter slot in cm:</b>	BK 3,5   Package 15,5
<b>Width letter slot in cm:</b>	BK 36.5   Package 35.5
<b>Overall height in cm:</b>	160,0
<b>Total width in cm:</b>	74,0
<b>Depth in cm:</b>	38,0
<b>Weight in kg:</b>	65,0
<b>Delivery condition:</b>	Delivery is made in blocks, stand elements / letterbox divided
<b>Shipping information:</b>	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.