




Order number: 515RAB-R-KSCSWIFI-UP100

Note: After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.

Manufacturer: Briefkasten Manufaktur Lippe

ab **€2,229.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

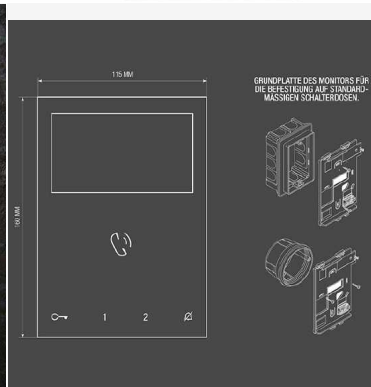

Stainless steel mailbox Designer Organic BIG - RAL of your choice - Comelit VIDEO Komplettsset Wifi

High quality manufactured mailbox of the brand Briefkasten Manufaktur in extra large format. With a newspaper drop flap suitable for newspapers, magazines and book mail. Integrated Comelit VIDEO complete set Wifi. Comelit video intercom is an innovative solution with features such as facial recognition, Voice commands and operation via app with your smartphone. Completely pre-programmed for easy installation - connect 2 wires and DONE!

Organic lines and sleek design distinguish the designer mailbox Organic. Our products have a high value, reliable functionality and their own identity. Made by Mailbox Manufacture.

- Designer stainless steel single-wall mailbox made of 2 mm stainless steel V2A 1.4301, front panel powder-coated in RAL of your choice. Optionally also as surface-mounted variant.
- Front-side mail removal door 350 mm x 300 mm, to open from top to bottom. Incl. 2 keys with key number.
- Mail slot from front, dimensions of slot: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending. Attention no removal protection!
- With built-in damping elements, these let the insertion flap close slowly and quietly.
- Bell button made of stainless steel with changeable name plate, illuminated.
- Optionally with house number, backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0.1-4W for the LED lighting of the house number.
- Dimensions flush-mounted or surface-mounted box: H 710 mm x W 410 x D 100 | 150 mm. Flush-mounted box with pre-punched cable inlets and fixing points on all sides. Surface box for wall mounting with perforation on the back, surface box for fence mounting without perforation (must be done on site). ATTENTION: The front panel of the surface box also protrudes by 3.5 cm.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your local electrician for planning, mounting and installation.

Water protection

To achieve optimum water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible. Mail is only protected from water when it is completely deposited in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Connection technology:	2-wire bus technology
Height single box in cm:	71,0 79,0
Width single box in cm:	41,0 48,0
Volume single box in liters:	21,0 31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Depth in cm:	10,0 15,0
Weight in kg:	32,0
Delivery condition:	Delivery is assembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).