


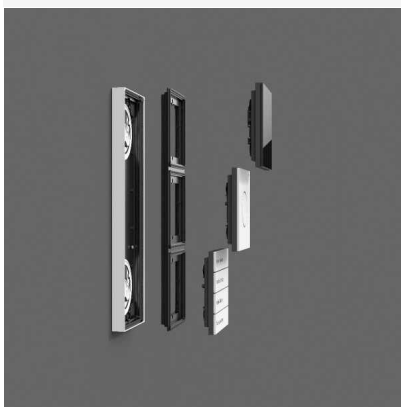
**Order number:** S106-5539000  
**Manufacturer:** GIRA

ab **€146.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)



	Herbert Brendel	Herbert Brendel
	Familie Schultze	Familie Schultze
	Katrin Schiller	Katrin Schiller
	Michael Weber	Michael Weber





## Gira System 106 4-gang call button module with start-up buttons - 1-4 buttons

### **ATTENTION without buttons & call button cover!**

The Gira System 106 is an installation system made of real metal in a purist, elegant design without a frame, based on a basic dimension of 106.5 × 106.5 mm. With the modular door station in the Gira System 106, hospitality begins at the front door. From the call button, voice and camera module to the info and blind module, all functions are presented in a harmonious overall appearance. In the dark, the backlit call buttons with labeling field ensure good legibility and an attractive appearance.

The System 106 can be used in single- and multi-family homes, but also in office buildings, industrial properties and hotels. The modular design makes it possible to adapt the system in size, design and functionality to individual requirements. Extensions and modifications are easily possible at any time by exchanging modules. Even a pure front change is possible with the system. This means that the appearance of the system can also be changed at a later date from, for example, traffic white to a stainless steel finish without having to replace the electronic units at the same time.

### **Simple installation and step-by-step assembly**

The system can be installed in various stages parallel to the construction progress. Thus, it is possible to install only the lower part of the surface-mounted housing at first during the shell construction; lines and modules can then be added when they are needed.

### **Technical data**

#### **Power supply**

System: via ribbon cable, 10-pin

#### **Power consumption**

Maximum: 160 mW

Stand-by mode: 14 mW

#### **Connections**

System: 2 x Connector strip

**Ambient temperature:** -25 °C to +70 °C

**Protection class:** IP54

### **Abmessungen & Details**

**Height in cm:** 10,65

**Width in cm:** 10,65