


Order number: 609ZB-EC-C2O Manufacturer: PHOENIX CONTACT

ab €239.00 \*

incl. VAT plus shipping costs (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

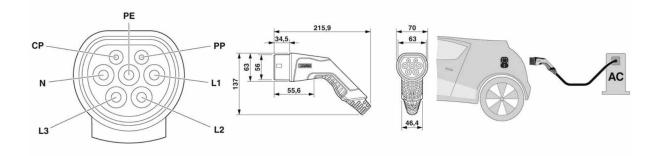

## Phoenix Contact Mode 3 charging cable type 2 / open line end-length 15m

Safe and fast: With the Phoenix Contact Mode 3 charging cable type 2 / open cable end, you can charge your electric car with up to 22 kilowatts- at your own wall box or on the go at a public power filling station. The type 2 connection has now established itself in most evehicle models that are sold in Germany.

The two types of type stand for the plugs/connections of the EcAbles. The open cable end is wired to the charging station or box, the other type 2 plug must fit to connect your electric car. The three-phase plug is EU standard and has a maximum charging output of 22 kilowatts.

- · full flexibility with 15.0 meter cable length
- · manufactured in Germany

## **Technical data**

- cable length: 15.0m
- · Color: black/gray
- for all electric cars and plug-in hybrids with type 2 plugs (European standard: IEC 62196-2).
- Connection infrastructure page: Open line ending for installing charging stations for electromobility (EVSE)
- plug side: IEC type 2 plugs (female) according to IEC/DIN EN 62196-2; 3P+N+PE and signal contacts PP+CP
- performance: three-phase 480 V AC, three-phase, max. 32a, max. 26.6 kW

## e-cars with type 2 connection (status 03/2020)

- BMW i3
- byd e6
- Mercedes Benz B250E
- Hyundai ioniq
- · Opel ampera-e
- Renault Zoe
- Renault Kangoo Z.E.
- · Smart Ed BR453 (Coupé, Forfour, Cabrio)
- · Tesla Model S
- Tesla Model X
- Volkswagen Egolf (2017)
- Volkwagen Eup

## **Abmessungen & Details**

Cable length: 15.0m

**Charging port:** Type 2 - open **Charging standard:** Mode 3

Protection class: IP44 (plugged), IP54 (protective cap)

22kW Charging power: Weight in kg: 7,5

Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries

Shipping information: are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be

shipped separately).