




**Order number:** 608-V2-R-IND-R

**Note:** After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€3,799.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

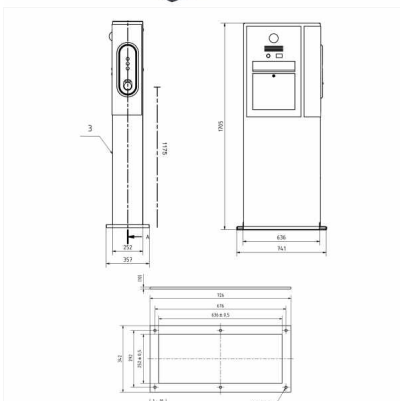

## stainless steel mailbox column designer Big Edge V2- RAL of your choice- individually

High quality mailbox column of the brand mailbox manufaktur with side door communication. Clear line, straightforward design and high-quality materials are characterized by the 3mm stainless steel mailbox column of the designer collection. The mailbox column is welded by hand, so that there are no screw connections, hair or gaps in the area of the body. The rear-sized revision door enables one-piece assembly, as well as subsequent work for e.g. repairs or for regular control. The revision door is protected against vandalism with a high-quality door lock.

Handmade in the mailbox manufacturer made of stainless steel V2A 1,4301, powder-coated as a mailbox free-standing. A real eye-catcher among the mailboxes, this system cuts a good figure everywhere. The designer mailbox steles are characterized by a clear line and straightforward design. Our products have a high value, reliable functionality and their own identity.

- mailbox column with side door communication made of 3mm stainless steel V2A 1.4301, powder-coated in RAL color.
- Quality production- Made in Germany- mailbox manufacturer Lippe.
- Backstye inspection flap W 250 mm x H 700 mm including 2 key.
- The mailbox module consists of 2mm stainless steel V2A 1,4301, powder-coated in RAL color.
- front-side post-withdrawal door B 350 mm x H 300 mm.
- Settling from the front, throw-in size suitable for C4 transverse (bra 350mm x 63mm).
- with built-in damping elements, which let the throw-in flap slowly and quietly close.
- 8-12V DC Kurzhub bell button with LED ring lighting (blue, white, red or green).
- Optional is an 8-12V DC short-lived light button with pictogram.
- optionally interchangeable name tag made of stainless steel with laser lettering or name tag made of plexi.
- Preparation (installation speaker not included) for intercom.
- Optional with universal adapter for all commercially available installation speakers.
- Optional preparation (not included in the scope of delivery) for a camera.
- House number and name or street lettering, rear lighted in white including EVN LED system/Trafo IP65/DC 0.1- 4W for LED lighting.
- The fully welded mailbox column consists of 3mm stainless steel V2A 1,4301, powder-coated. Height is 1.70 m.
- The stele is equipped with a fus plate made of VA. This is 10 mm thick and is refined with a cover panel. See pictures.
- Invisible cable supply possible by the corpus.
- The steles are equipped with modules that can still be exchanged later.

### important information

#### camera or voice center preparation

**We always recommend the electrical installation to be carried out by an electrical installer.**

We offer the preparation of cameras & speakers from different manufacturers for our mailboxes. The preparation does not contain any end devices, which are the provision of the screw recordings, bores and perforations. So that you can easily install your device.

#### water protection

In order to achieve optimal water protection of your post, the mailbox or the mailbox system should be under a canopy if possible. The post office is only protected from water if it is completely stored in the box and the throw-in flap is closed. Not fully inserted mail enables the penetration of moisture and dirt into the mailbox. It is therefore necessary to plan sufficiently dimensioned mailboxes for the upcoming need. In certain extreme weather conditions, water can still occur (according to DIN EN 13724 to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Height single box in cm:	71,0   75,0
Width single box in cm:	41,0   45,0
Volume single box in liters:	31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Overall height in cm:	170,0
Total width in cm:	63.6 (footplate 74.0)
Depth in cm:	25.2 (footplate 36.0)
Weight in kg:	95,0
Delivery condition:	Delivery is assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.