






Order number: 601KL-R-KSVGI106-160-R

Note: After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.

Manufacturer: Briefkasten Manufaktur Lippe

ab **€4,821.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

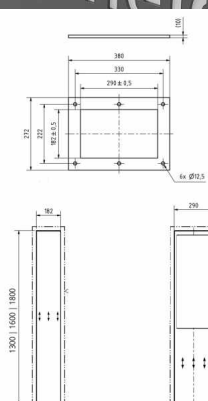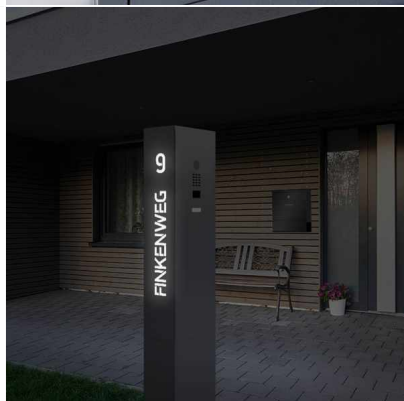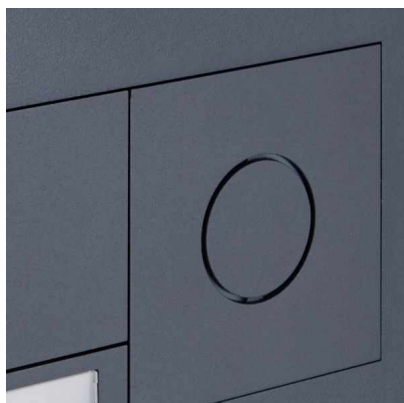

Stainless steel bell pillar designer EDGE - RAL of your choice - GIRA System 106 - video intercom - VIDEO Komplettset

High-quality manufactured bell pillar of the brand Briefkasten Manufaktur with frontal door communication and lateral inscription, illuminated. Clear line, straightforward design and high quality materials characterize the 2mm stainless steel bell pillar of the DESIGNER collection. The bell pillar is welded by hand, so that no screw connections, hairline joints or gaps are visible in the area of the body. The rear revision door allows easy installation, as well as subsequent work for example repairs or for regular inspection, without any problems. Equipped with a high-quality lock, the inspection door is protected against vandalism. Seamlessly integrated Gira System 106 in flush-mounted design. 3 GIRA system modules are included, so the letterbox can be used directly. The matching GIRA home station and control unit to complete this letterbox are included. The modules can be subsequently replaced as desired due to the simple retaining system.

Influenced by the idea of sustainability, this column was developed with a replaceable panel. All components can be replaced at any time, whether a new video intercom system, a new house number or a change of lettering, all components can be easily exchanged.

- Bell pedestal with frontal door communication and side lettering, illuminated made of 2mm stainless steel V2A 1.4301, powder coated in RAL color.
- Quality production - Made in Germany - Letterbox Manufaktur Lippe.
- Rear inspection flap W 250 mm x H 700 mm incl. 2 keys.
- House number and name or street inscription, backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0.1-4W for LED lighting.
- We will map house numbers over 2 digits below each other, otherwise the height is not sufficient.
- The fully welded doorbell steel is made of 2mm stainless steel V2A 1.4301, powder coated. Construction height is 1,80 m | 1,60 m | 1,30 m.
- The pillar is equipped with a base plate made of VA. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body possible.
- Incl. GIRA home station & control unit enclosed, System 106 door station module, info module & camera module installed.

[Now also available individually in the 3D configurator! Configure individual doorbell pillars and doorbell columns and test them directly in front of the front door via AR.](#)

GIRA

Camera module Gira System 106 - 5561 000, installed without wiring

The replaceable black glass panel conceals a high-quality camera with high light sensitivity. Thanks to a detection angle of 100°, the user is always in the picture about what is happening outside his front door.

Info module Gira System 106 - 5560 920, installed

- For inscriptions that need to be clearly visible.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with voltage via the door station module.

Home station Gira video surface-mounted 7 1209xx, enclosed

Video home station with a 17.78 cm (7") TFT color display and convenient hands-free function for surface mounting or wall mounting with flush-mounted device box or cavity wall box. With the optional stand (see accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

• [Further information](#)

Control device video REG Gira 128800, enclosed

- Control device for supplying the audio and video components of the Gira door communication bus.
- Supply of the reverse polarity protected and short-circuit proof 2-wire bus when using video components such as color camera, TFT color display.
- Up to 2 door stations with color camera and 28 home stations with TFT color display can be supplied via the video control device.
- A total of up to 15 color cameras can be controlled by the video control device (5 door stations video and 10 TKS camera gateways), of which two door stations with color camera can be supplied with voltage by the video control device. The other color cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door strike programming.
- AC 12 V output for powering a standard electric strike.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

• [Further information](#)

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your local electrician for planning, installation and wiring.

Water protection

For optimum water protection, the bell system should be located under a canopy if possible.

Abmessungen & Details

Number of parties:	1
Base material:	Stainless steel
Connection technology:	2-wire bus technology
Overall height in cm:	130,0 160,0 180,0
Total width in cm:	29.0 (footplate 39.5)
Depth in cm:	18.2 (footplate 28.7)
Weight in kg:	45,0
Delivery condition:	Delivery is assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.