


Order number: 382XU-VA-12-SPS-100-R
Manufacturer: Briefkasten Manufaktur Lippe



ab **€3,089.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

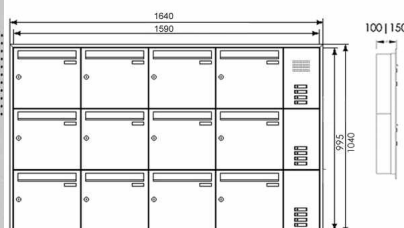

12-compartment Stainless steel flush-mounted letterbox system BASIC Plus 382XU UP with bell box on the side - polished stainless steel

Modern flush-mounted mailbox for 12 parties - made in Germany by Briefkasten Manufaktur.

The mailbox is completely made of stainless steel V2A, polished. The very high quality workmanship and the sophisticated concept make this flush-mounted mailbox our top seller. A rain drainage edge for optimal water protection, a continuous rubber lip for quiet insertion, the solid changeable name plate, a practical mail holding bracket and the very robust lock distinguish this flush-mounted mailbox. The flush-mounted frame made of stainless steel V2A is equipped with a foam rubber seal and guarantees a very high durability.

The letterboxes of the BASIC Plus collection are characterized by the consistent use of stainless steel V2A. The result is a very high durability and sustainability. The design has been developed by our own engineers with a view to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

• 12 compartment flush-mounted letterbox system completely made of stainless steel V2A 1.4301, 240 grit polished

• The system is made at the Briefkasten Manufaktur. German quality production "Made in Germany".
 • The letterboxes comply with DIN/EN 13724. Insert size (3.5 cm x 32.5 cm) for C4 crosswise, here fit even large letters without bending.

• Insertion flap with noise-damping rubber seal for very quiet insertion of mail.

• The door can be opened from left to right.

• Incl. 2 keys with key number, changeable name plate (type 2) under the access flap and mail retainer.

• Large capacity due to optional mailbox depth +50 mm = approx. 17 l. Suitable for companies and households with very large mail volumes.

• Bell box made of stainless steel V2A, 240 grain ground

• Preparation (built-in speaker not included) for intercom possible. Optional with universal adapter for all commercially available built-in speakers.

• Universal adapter is suitable for all commercially available built-in speakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).

• Preparation (camera not included) for a camera.

• 12x round stainless steel bell push button type: Grothe Protact, max. 24 V AC/DC, 1,5 A, IP 54 (pressure force limitation).

• Changeable nameplate (type2), changeable from the front.

• Plaster cover frame made of stainless steel angle profile 25 x 58 mm, 240 grain ground.

Camera or intercom preparation

We recommend that electrical installation is always carried out by an electrician.

We offer preparation of cameras & intercoms of various manufacturers for our mailboxes. The preparation does not include terminal equipment, it is the provision of the screw mounts, holes & perforations. So that you can mount your terminal device without any problems.

Water protection

In order to achieve optimal water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	12
Item withdrawal:	Front
Base material:	Stainless steel
Height single box in cm:	33,0
Width single box in cm:	35,5
Volume single box in liters:	12,0 17,0
Height letter slot in cm:	3,5
Width letter slot in cm:	32,5
Height letterbox system in cm:	104,0
Width letterbox system in cm:	164,0
Depth in cm:	10,0 15,0
Weight in kg:	52,0
Delivery condition:	Delivery is completely assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.