





**Order number:** 864X-2-TM21

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€4,281.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users  
with VAT ID and Non-EU countries)

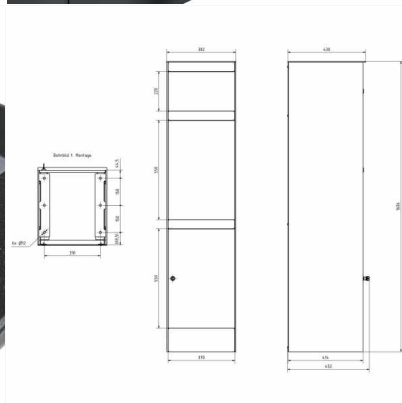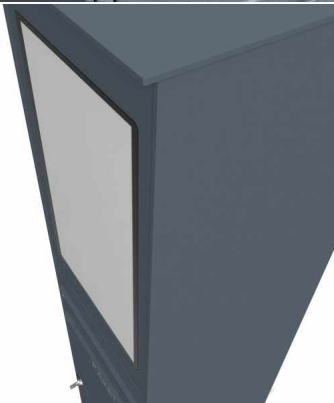

## 2-compartment Letterbox pillar BASIC Plus 864X - parcel compartment 550x370 - portrait format 21.5" touch screen - RAL of your choice

Modern 2 party mailbox column including parcel compartment and touch screen - made in Germany by Briefkasten Manufaktur.

The mailbox column is made entirely of stainless steel V2A and aluminum, powder coated in RAL color. The very high quality workmanship and the sophisticated concept make this mailbox column our top seller. A rain drainage edge for optimal water protection, a continuous rubber lip for quiet insertion, the solid interchangeable name plate and the very robust lock distinguish this mailbox column. The 6mm thick side panel with protruding rain cover made of aluminum offers optimal protection against the weather and guarantees a very high durability.

Parcel reception independent of the delivery person! Every parcel delivery service (e.g. DHL, DPD, TNT, GLS, Hermes, etc.) can use this parcel mailbox.

The elegant glass touch display is integrated flush with the surface. The brilliant, interactive PCAP display, allows for easy integration and up to 10 simultaneous touches - for an enhanced tablet-like experience. Manage your advertising board via PC over your network. The optional integrated Windows 10 boxed PC can easily be loaded with videos, presentations or simple applications. The connectivity also makes it easy to display web content, so operable content can also be displayed without effort. The letterbox systems of the BASIC Plus collection are characterized by the consistent use of stainless steel V2A and aluminum. The result is a very high durability and sustainability. The design has been developed by our own engineers with a view to high flexibility or modularity, simple spare parts assembly and uncomplicated self-assembly. Spare parts are directly available for all BASIC Plus systems.

### • 2 compartment Mailbox column with package compartment made of stainless steel V2A 1.4301 and aluminum, powder-coated in RAL color

- The complete mailbox column is designed in modular construction, therefore each component can be exchanged or changed at any time.
- Parcel locker 370x550x385 mm (WHT) incl. parcel lock with snap-in lock. With high-quality stainless steel laser inscription "PAKET".
- Volume parcel compartment: 77 liters, Max. Package size: 340 x 520 x 355 mm (WHT).
- Letterboxes 370x110x385 mm (WHT). Removal from the front, the removal door opens from left to right.
- Side panel and rain roof made of 6mm aluminum, powder coated.
- C4 letterbox from the front, large letters can be inserted without bending. Insertion flap with rubber lip.
- DIN EN 13724 compliant.
- Including 2 keys with key number per single box and changeable name plate (type 2) under the access flap (without inscription).
- Screwed back wall made of 2mm stainless steel V2A 1.4301, powder coated.
- Side panel and rain roof made of 6mm aluminum, powder coated.
- The stele is equipped with internal base plates made of 6mm aluminum. This hides the mounting dowels (not included, see accessories) for screw mounting.

### • LCD 21.5" touchscreen flat panel monitor

- **Display type** 21.5 inch diagonal, active matrix TFT LCD (LED)
- **Screen resolution** 1920 x 1080 pixels (Full HD)
- **Aspect ratio** 16:9
- **Viewing angle** Horizontal: ±89° or 178° total / Vertical: ±89° or 178° total
- **Touch technology** PCAP (TouchPro® projected capacitive sensor technology) - 10 Touch
- **Brightness** 360 cd/m² typical (adjustable)
- **Backlight** LED
- **MTBF backlight** > 50000 h
- **Colors** 16.7 million colors
- **Video input format** HDMI V1.3 Type A socket for HDMI input, Analog VGA connector on DB-15 connector socket, DisplayPort V1.1a - supports newer versions of DisplayPort video input
- **Video interface** HDMI, VGA and DisplayPort
- **I/O connectors** USB TypeB, RJ45 for OSD remote control, VGA, HDMI, DisplayPort, 12 V D/C
- **Protection class** IP65 (front side), IP20 (rear side)
- **Ambient temperature (operating)** 0 °C ... 40 °C
- **Ambient temperature (storage/transport)** -20 °C ... 60 °C
- **Permissible humidity (operation)** 20 % ... 80 % (no condensation)

### Important information:

Mail is only protected from moisture and contamination when fully inserted and the flap is closed. In certain extreme weather conditions, water may nevertheless enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

<b>Number of parties:</b>	2
<b>Item withdrawal:</b>	Front
<b>Base material:</b>	Stainless steel, Aluminum
<b>Operating system:</b>	Windows 10
<b>Screen orientation:</b>	Portrait
<b>Panel:</b>	21.5 inch LCD
<b>Interfaces:</b>	USB, DisplayPort, RJ45
<b>Height single box in cm:</b>	BK 11.0   PK 55.0
<b>Width single box in cm:</b>	37,0
<b>Volume single box in liters:</b>	BK 16.0   PK 77.0
<b>Height letter slot in cm:</b>	3,5
<b>Width letter slot in cm:</b>	32,5
<b>Overall height in cm:</b>	160,6
<b>Total width in cm:</b>	38,2
<b>Depth in cm:</b>	41.4 + 1.6 Rain roof
<b>Weight in kg:</b>	58,0
<b>Delivery condition:</b>	Delivery is assembled
<b>Shipping information:</b>	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.