





Order number: 515BDI-SR-KSCSSW-UP100

Note: After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.


Manufacturer: Briefkasten Manufaktur Lippe

ab **€2,529.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

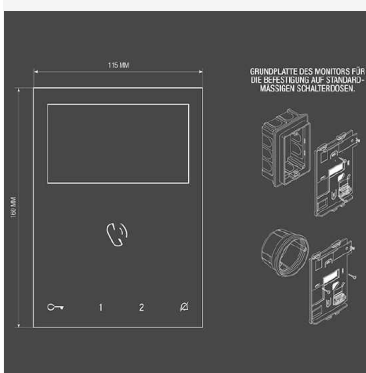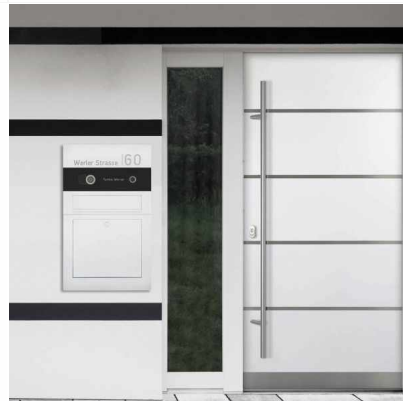

Alle Angaben unter Vorbehalt von technischen Änderungen in mm. Maßtoleranzen möglich +/- 2mm.

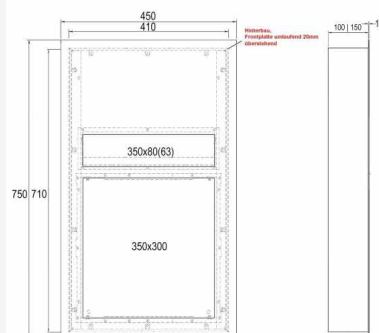

Stainless steel mailbox Division BIG - BI-Color Edition - Comelit Switch VIDEO complete set Wifi - 2-wire

The mailbox Division with its massive 10mm design panel is a top class model among the mailboxes. The 2mm front panels made of stainless steel V2A 1.4301 in your desired color are mounted on a 5mm stainless steel frame and stand out slightly from the house wall in this respect. Influenced by the idea of sustainability, this mailbox, based on the Designer collection, was developed with interchangeable panels. All panels can be replaced at any time, whether a new video intercom system, a new house number or a change of lettering, all panels can be easily exchanged. The Division BIG model has a newspaper insertion flap for newspapers, magazines and book mail.

Integrated Comelit VIDEO complete set Wifi. The Comelit video intercom is an innovative solution with features such as facial recognition, voice commands and operation via app with your smartphone. Completely pre-programmed for easy installation - connect 2 wires and DONE!

A real eye-catcher among mailboxes. Clean lines and sleek design distinguish the Division mailbox. Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Letterbox made of stainless steel V2A 1.4301, 2mm front panels + 5mm frame powder coated in RAL of your choice. Optionally also as surface-mounted variant with surface-mounted box in stainless steel, 240 grain polished.
- 2. Front panel with door communication made of stainless steel V2A 1.4301, powder coated in RAL 9005 deep black fine structure matt
- Frontal mail removal door 350 mm x 300 mm, to be opened from top to bottom. Incl. 2 keys with key number.
- Mail slot from front, dimensions of slot: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending. Attention no removal protection!
- 8-12V DC short stroke bell push button with LED ring illumination (blue, white, red or green). The illumination of the bell push button can not be supplied by the control unit. It must be connected to an additional 8-12 V DC power supply.
- Optional replaceable nameplate made of stainless steel with laser inscription or nameplate made of plexi.
- Optionally with house number approx. 50-70mm high (height depends on number of characters) and inscription 10-70mm (height depends on number of characters) backlit with stainless steel, polished or backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0,1-4W for the LED illumination of the house number.
- Optionally a 8-12V DC short stroke light switch with pictogram is possible.
- Dimensions flush-mounted or surface-mounted box: H 710 mm x W 410 x D 100 | 150 mm. Flush-mounted box with pre-punched cable inlets and mounting points on all sides. Surface box for wall mounting with perforation on the back, surface box for fence mounting without perforation (must be done on site). ATTENTION: The front panel of the surface-mounted box also protrudes by 2 cm.
- Plaster box made of galvanized steel. Surface box made of stainless steel V2A, ground on all sides without visible screw connection.
- Plaster box with pre-punched cable inlets on all sides.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, installation and wiring.

Water protection

To achieve optimum water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible. Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Connection technology:	2-wire bus technology
Height single box in cm:	71,0 75,0
Width single box in cm:	41,0 45,0
Volume single box in liters:	21,0 31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Depth in cm:	10,0 15,0
Weight in kg:	36,0
Delivery condition:	Delivery is assembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).