




Order number: 599B-R-HL-B-V-GI106


Manufacturer: Briefkasten Manufaktur Lippe

ab **€2,249.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

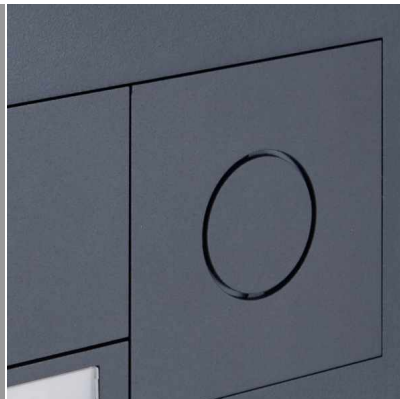

Eingebaute Dämpfungselemente lassen die Einwurflappe langsam und leise schließen

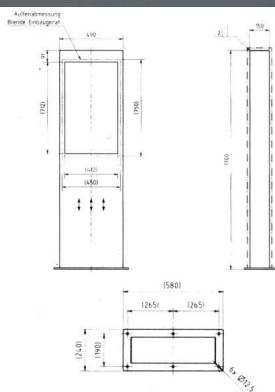

Letterbox column Designer BIG - RAL at choice - house number- GIRA System 106 - 3-compartment prepared

High-quality manufactured letterbox column of the brand Briefkasten Manufaktur made of stainless steel, powder coated with backlit house number. The Gira System 106 can be used seamlessly in the flush design. The preparation is intended for 3 pieces GIRA 106 system modules. The modules can be used flush with the surface thanks to the simple holding system (surface-mounted housing 5503910 required!).

- The mailbox module is made of 2mm stainless steel V2A 1.4301, powder coated in RAL color.
- Front-side mail removal door 320 mm x 300 mm, to be opened from top to bottom. Incl. 2 keys with key number.
- Mail slot from front, dimensions of slot: W 32 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending.
- With built-in damping elements, these let the insertion flap close slowly and quietly.
- House number approx. 70-100mm high (max. 3 digits) with power-saving LED lighting 12V DC approx. 50mA / 1W, white.
- Incl. EVN LED power supply / transformer IP65 12V/DC 0,1-4W for the LED lighting.
- The columns are equipped with modules that can be replaced later.
- The fully welded column is made of 2mm stainless steel V2A 1.4301, powder coated in RAL color. Construction height is 1,70 m.
- The pillar is equipped with a base plate made of VA. This is 10 mm thick and is finished with a cover plate. See pictures.
- Invisible cable feed through the body is possible.

• **WITHOUT GIRA system components!**

Important information

Camera or intercom preparation

Intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.

Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Height single box in cm:	71,0 95,0
Width single box in cm:	41,0 45,0
Volume single box in liters:	31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Overall height in cm:	170,0
Total width in cm:	49.0 (footplate 58.0)
Depth in cm:	15.0 (footplate 24.0)
Weight in kg:	65,0
Delivery condition:	Delivery is assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.