




Order number: 385A-7016-1-SP

Manufacturer: Briefkasten Manufaktur Lippe

ab **€539.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

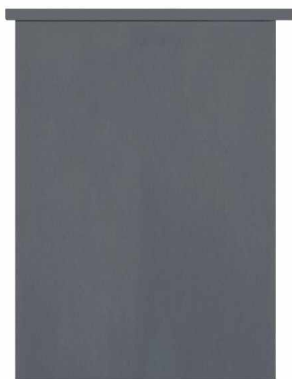

1er Aufputz Briefkastenanlage Design BASIC 385A-7016-SP with bell box incl. side panel & rain roof - mailboxes horizontal - anthracite-gray RAL 7016

Modern surface-mounted mailbox made in Germany by Briefkasten Manufaktur.

The mailboxes are made of galvanized steel, powder coated in RAL 7016 anthracite gray. A close-fitting side panel with rain cover and the rain gutters for optimal water protection, a throw-in flap with rubber lip, the solid interchangeable name plate and the robust lock distinguish this mailbox system. This mailbox is easy to clean and insensitive.

Thanks to the construction method, self-assembly is uncomplicated.

- **1er surface mailbox completely powder-coated in RAL 7016 anthracite gray fine structure matt**
- The system is created at the letterbox manufactory. German quality production "Made in Germany".
- The mailboxes are made of galvanized steel, powder coated in RAL 7016 anthracite-gray fine structure matt and comply with DIN/EN 13724. Insertion size (3.5 cm x 26.5 cm) for C4 high, here fit even large letters without bending.
- Insertion flaps with noise-damping rubber lip for very quiet insertion of mail.
- The doors can be opened from left to right.
- Incl. 2 keys with key number and change name plate under the access flap per mailbox.
- Incl. close-fitting side panel + rain roof made of stainless steel V2A, powder coated in RAL 7016 anthracite gray fine structure matt.
- **Bell box made of galvanized steel, powder coated in anthracite gray RAL 7016**
- Speech perforation with universal adapter. (Intercom system/built-in speaker not included).
- Universal adapter is suitable for all commercially available built-in speakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- Round stainless steel bell push type: Grothe Protact, max. 24 V AC/DC, 1.5 A, IP 54 (pressure force limitation).
- Anti-vandalism - the nameplate is dent-proof and impact-resistant, the plastic is flame-retardant.
- Incl. mounting material for wall mounting.

Important information:

Mail is only protected from moisture and dirt when fully inserted and the flap is closed. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Steel galvanized, Stainless steel
Height single box in cm:	11,0
Width single box in cm:	30,0
Volume single box in liters:	12,0
Height letter slot in cm:	3,5
Width letter slot in cm:	26,5
Height letterbox system in cm:	22,0
Width letterbox system in cm:	30,0
Depth in cm:	43,5
Weight in kg:	15,0
Delivery condition:	Delivery is completely assembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).