






**Order number:** 515BDI-SR-IND-UP100

**Note:** After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€1,629.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

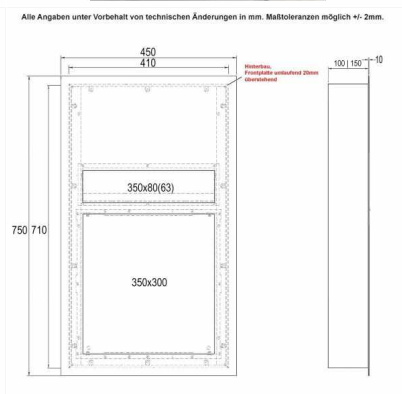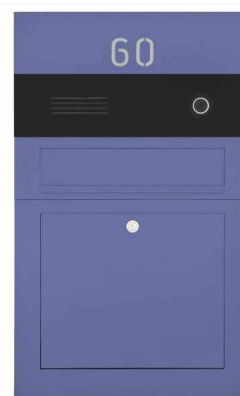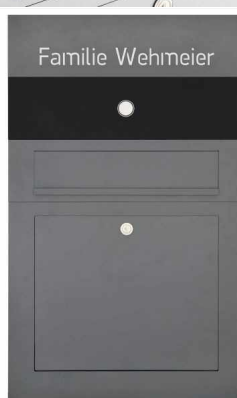

## Stainless steel letterbox Division BIG - BI-Color Edition - bell intercom - house number

With its solid 10mm design panel, the Division letterbox is a top-class model among letterboxes. The 2mm front panels made of stainless steel V2A 1.4301 in the colour of your choice are mounted on a 5mm stainless steel frame and stand out slightly from the house wall in this respect. Characterised by the idea of sustainability, this letterbox was developed on the basis of the Designer collection with exchangeable panels. All panels can be replaced at any time, whether a new video intercom system, a new house number or a change of lettering, all panels can be easily exchanged. The Division BIG model has a newspaper insertion flap for newspapers, magazines and book mail.

The design letterbox Division is optionally equipped with a bell and a preparation for an intercom system. We offer a flexible selection of built-in loudspeaker preparations from all intercom manufacturers. Others are also available on request.

A real eye-catcher among letterboxes. Clear lines and sleek design are the hallmarks of the Division letterbox. Our products have a high quality, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Mailbox made of stainless steel V2A 1.4301, 2mm front panels + 5mm frame powder-coated in RAL of your choice. Also available as a surface-mounted version with a surface-mounted box in stainless steel, 240 grit.
- 2. Cover with door communication made of stainless steel V2A 1.4301, powder-coated in RAL 9005 deep black fine structure matt.
- Front post removal door 350 mm x 300 mm, opens from top to bottom. Incl. 2 keys with key number.
- Mail slot from the front, slot dimensions: W 35 cm x H 6.3 cm, C4 across. Very large letters fit in here without buckling. Attention no removal protection!
- 8-12V DC short-stroke bell button with LED ring lighting (blue, white, red or green).
- Optionally interchangeable nameplate made of stainless steel with laser inscription or nameplate made of plexi.
- Optionally with house number approx. 50-70mm high (height depends on the number of characters) and lettering 10-70mm (height depends on the number of characters) backed with stainless steel, ground or backlit in white; incl. EVN LED power supply unit / transformer IP65 12V/DC 0.1-4W for the LED lighting of the house number.
- An 8-12V DC short-stroke light button with pictogram is optionally available.
- Preparation (built-in speaker not included) for intercom possible.
- Dimensions of flush-mounted or surface-mounted box: H 710 mm x W 410 x D 100 | 150mm Flush mount box with pre-punched cable entries and mounting points on all sides. Surface-mounted box for wall mounting with rear perforation, surface-mounted box for fence mounting without perforation (must be done on site). ATTENTION, even with the surface-mounted box, the front panel protrudes 2 cm all around.
- Plaster box made of galvanized steel. Surface-mounted box made of stainless steel V2A, ground on all sides without visible screws.
- Plaster box with pre-punched cable inlets on all sides.

### Important Information

#### Intercom station preparation

**We recommend that the electrical installation is always carried out by an electrician.**

We offer the preparation of built-in speakers from various manufacturers for our mailboxes. No end devices are included in the preparation, this involves the provision of the screw mounts, bores and perforations. So that you can easily mount your end device.

#### Water protection

In order to achieve optimal water protection for your post, the mailbox or mailbox system should be located under a canopy if possible.

The mail is only protected from water if it is completely placed in the box and the flap is closed. Mail that is not fully inserted allows moisture and dirt to enter the mailbox. It is therefore necessary to plan mailboxes that are sufficiently dimensioned for the upcoming requirements. This system is protected against the ingress of water according to DIN EN 13724. Water ingress is not a reason for complaint.

### Abmessungen & Details

<b>Number of parties:</b>	1
<b>Item withdrawal:</b>	Front
<b>Base material:</b>	Stainless steel
<b>Height single box in cm:</b>	71,0   75,0
<b>Width single box in cm:</b>	41,0   45,0
<b>Volume single box in liters:</b>	21,0   31,0
<b>Height letter slot in cm:</b>	6,3
<b>Width letter slot in cm:</b>	35,0
<b>Depth in cm:</b>	10,0   15,0
<b>Weight in kg:</b>	36,0
<b>Delivery condition:</b>	Delivery is assembled
<b>Shipping information:</b>	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).