








Order number: 215-STQ-1-SP-ZF-KSGI106

Manufacturer: Briefkasten Manufaktur Lippe

ab **€5,093.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users
with VAT ID and Non-EU countries)

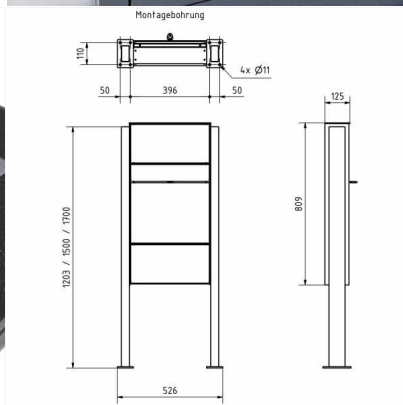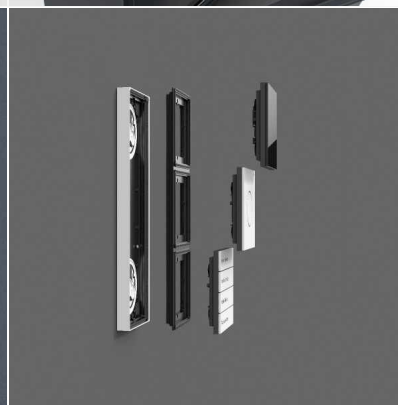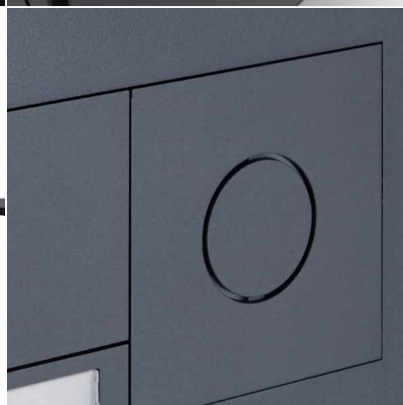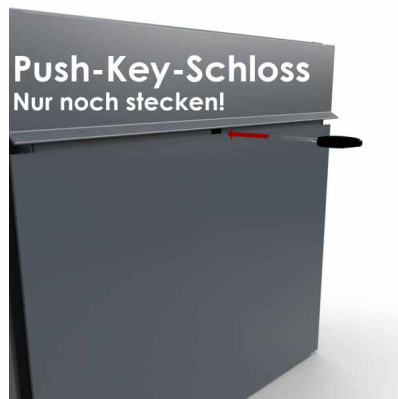



Design free-standing letterbox GOETHE ST-Q with newspaper compartment - RAL at choice - GIRA System 106 - VIDEO Complete kit

High-quality manufactured free-standing letterbox with newspaper compartment and seamlessly integrated Gira System 106 in flush design. The modern GOETHE letterbox is ideal for the sophisticated entrance area. The straight-lined design without a visible lock makes this letterbox look particularly elegant. 3 GIRA system modules are included, so the letterbox can be used directly. The matching GIRA home station and the control unit to complete this letterbox are included. The modules can be subsequently replaced as desired due to the simple holding system.

The dimensions of the single box allow a capacity of approx. 16 liters, the large insertion guarantees no crumpled mail even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is invisibly hidden inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this mailbox is designed so that the removal door prevents mail from falling towards you. Due to the water drainage edge, the mail inside is optimally protected from the weather. The insertion flap is equipped with high-quality axle dampers, so quiet closing is guaranteed and there is no annoying rattling due to weather conditions.

The letterboxes of the GOETHE collection are characterized by the consistent use of stainless steel and aluminum. The result is a very high durability and sustainability. The design has been developed by our own engineers with regard to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are directly available in our store.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- free-standing letterbox made of stainless steel and aluminum.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder coated in RAL of your choice.
- Innovative push-key lock with 2 keys.
- Letter insertion and removal from the front. Insertion flap with high-quality axle dampers for very quiet insertion of mail.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape, here fit even large letters without bending.
- Removal door can be opened from top to bottom. So the mail can not fall against you.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser inscription "NEWSPAPER (will be engraved in your desired language)" (font ARIAL, if name/house number, then equal to your chosen font).
- Newspaper box can be opened from bottom to top.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder coated in RAL of your choice.
- Nameplate made of stainless steel, powder coated in RAL color. Your name and/or a bell are optionally lasered on the nameplate.
- Optionally with house number, lasered (a name inscription can also be deposited here).
- Optimal rain protection through rain protection edges and a rain canopy made of 3mm aluminum AlMg3 W19, powder coated in RAL of your choice.
- Side panel made of 3mm aluminum AlMg3 W19, powder coated in RAL of your choice.
- Back panel made of 1mm stainless steel V2A 1.4301, powder coated in RAL of your choice.
- The W 40 mm x D 80 mm pedestals are made of 2mm stainless steel V2A 1.4301, powder coated in RAL color for setting in concrete or screw mounting. Invisible cable routing through the columns.
- Incl. GIRA home station & control unit enclosed, System 106 door station module, info module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without wiring

- A high-quality camera with high light sensitivity is concealed behind the replaceable black glass pane. Thanks to a detection angle of 100°, the user is always in the picture about what is happening outside his front door.

Info module Gira System 106 - 5560 920, installed

- For house numbers that need to be clearly visible.

Door station module Gira System 106 - 5565 920, installed without wiring

- Compact voice module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good communication.
- Power supply via 2-wire bus. Additional connection for ZV (e.g. necessary from 3rd camera module).
- All other System 106 modules (except voice module) are supplied with voltage via the door station module.

Home station Gira video surface-mounted 7 1209xx, enclosed

- Video home station with a 17.78 cm (7") TFT color display and convenient hands-free function for surface mounting or wall mounting with flush-mounted device box or cavity wall box. With the optional stand (see accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-surface glass front with touch functionality and tactile feedback.

[Further information](#)

Control device video REG Gira 128800, enclosed

- Control device for supplying the audio and video components of the Gira door communication bus.
- Supply of the reverse polarity protected and short-circuit proof 2-wire bus when using video components such as color camera, TFT color display.
- Up to 2 door stations with color camera and 28 home stations with TFT color display can be supplied via the video control device.
- A total of up to 15 color cameras can be controlled by the video control device (5 door stations video and 10 TKS camera gateways), of which two door stations with color camera can be supplied with voltage by the video control device. The other color cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door opener programming.
- LED status indicators for operation, overload, system programming and door strike programming.
- AC 12 V output for powering a standard electric strike.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time continuously adjustable from 1 to 10 s.

[Further information](#)

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Please contact your local electrician for planning, installation and wiring.

Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel, Aluminum
Connection technology:	2-wire bus technology
Height single box in cm:	BK 40.0 ZF 20.0
Width single box in cm:	40,0
Volume single box in liters:	BK 16.0 ZF 8.0
Height letter slot in cm:	3,5
Width letter slot in cm:	36,0
Height letterbox system in cm:	80,0
Width letterbox system in cm:	40,0
Overall height in cm:	120,0 150,0 170,0
Total width in cm:	48,8
Depth in cm:	10.0 + 2.5 Rain roof
Weight in kg:	33,0
Delivery condition:	Delivery is assembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).