



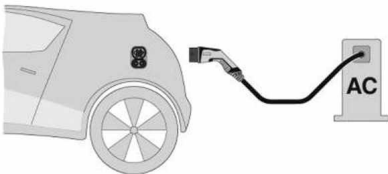

Order number: 609ZB-EC-SP-C2O
Manufacturer: PHOENIX CONTACT

ab **€159.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

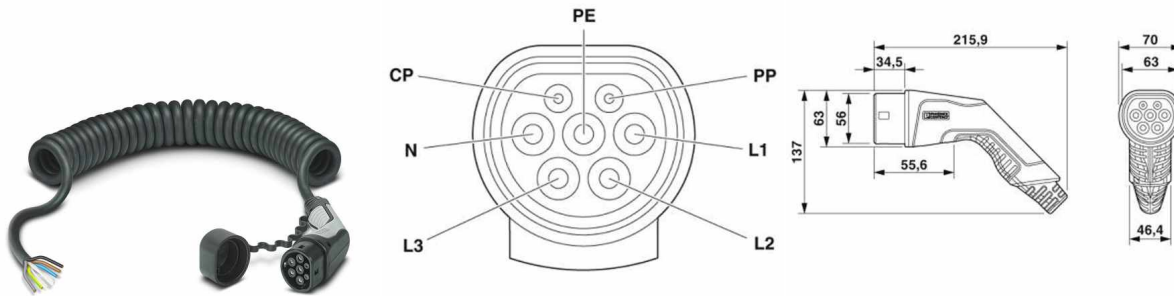

PHOENIX CONTACT Mode 3 charging cable spirals type 2 / open cable end - length 4m

Safe and fast: With the Phoenix Contact Mode 3 charging cable Type 2 / open cable end, you can charge your electric car with up to 22 kilowatts - at your own wallbox or on the road at a public charging station. The Type 2 connection is now established on most e-vehicle models sold in Germany.

The two type designations stand for the plugs/connections of the eCable. The open cable end is wired to the charging pole or box, the other type 2 plug must match the connection of your e-car. The three-phase plug is EU standard and has a maximum charging capacity of 22 kilowatts.

- Full flexibility with 4.0 metre spirals cable length.
- Made in Germany

Technical data

- Cable length: 4.0m
- Colour: black/grey
- For all electric cars and plug-in hybrids with type 2 plug (European standard: IEC 62196-2).
- Connection infrastructure side: open cable end for installation at charging stations for electromobility (EVSE).
- Connector vehicle side: IEC type 2 plug (female) according to IEC/DIN EN 62196-2; 3p+N+PE and signal contacts PP+CP.
- Power: three-phase 480 V AC, three-phase, max. 32A, max. 26.6 kW

E-cars with type 2 connection (as of 03/2020)

- BMW i3
- BYD e6
- Mercedes Benz B250e
- Hyundai ioniq
- Opel Ampera-e
- Renault ZOE
- Renault Kangoo Z.E.
- Smart ED BR453 (Coupé, Forfour, Convertible)
- Tesla Model S
- Tesla Model X
- Volkswagen eGolf (2017)
- Volkswagen eUp

Abmessungen & Details

Cable length: 4,0m

Charging port: Type 2 - open

Charging standard: Mode 3

Protection class: IP44 (plugged), IP54 (protective cap)

Charging power: 22kW

Weight in kg: 4,1

Shipping information: Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).