






Order number: 515DW-VAR

Note: After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.

Manufacturer: Briefkasten Manufaktur Lippe

ab **€1,339.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

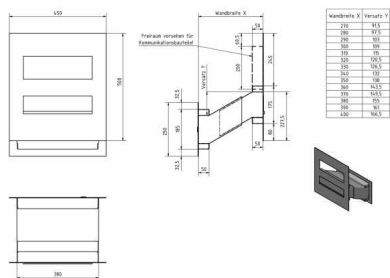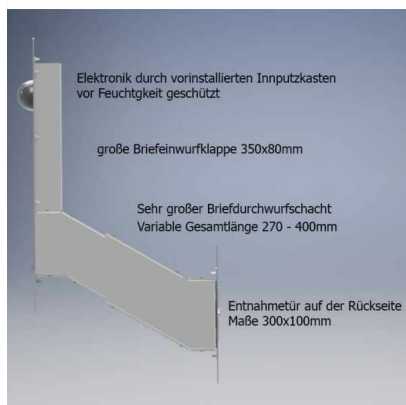

Stainless steel wall pass-through mailbox designer model - Clean Edition - RAL at choice with bell - intercom - lettering - optional camera

High-quality manufactured pass-through mailbox of the brand Briefkasten Manufaktur. Due to the variable shaft length between 270mm to 400mm, this mailbox can be used in pretty much all masonry. The mail removal takes place on the back. The front and rear stainless steel plates made of 2mm stainless steel V2A, powder coated to RAL 7016 anthracite gray fine structure matt. can be mounted invisibly on the wall thanks to the screw connection inside the shaft. No fastening screws are visible.

A real eye-catcher among the mailboxes. Clear lines and no-frills design characterize the designer mailbox. Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur.

- Designer stainless steel pass-through mailbox made of 2 mm stainless steel V2A, powder coated according to RAL fine structure matt.
- Rear mail removal door 300x100mm, to open from left to right. Incl. 2 keys with key number.
- Mail slot from the front, dimensions slot: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending. Attention no removal protection!
- Optionally with house number in polished optics, put on.
- Exchangeable nameplate made of stainless steel with laser inscription.
- 8-12V DC short stroke bell push button with LED ring illumination (blue, white, red or green). The illumination of the bell push buttons can not be supplied by the control unit. It must be connected to an additional power supply.
- Optionally, a 8-12V DC short-stroke light button with pictogram is possible.
- Preparation (built-in speaker not included) for intercom possible.
- Optional universal adapter for all commercially available built-in speakers.
- Optional preparation (camera not included) for a camera.
- Dimension front panel W 450mm x H 500mm.
- Dimension cover plate with removal door W 450mm x H 250mm.
- Dimension letter chute W 380mm x H 210-280mm.
- Variable shaft length 270-400mm.

Camera or intercom preparation

We recommend that the electrical installation is always done by an electrician.

We offer preparation of cameras & intercoms of different manufacturers for our mailboxes. The preparation does not include terminal equipment, it is the provision of the screw mounts, holes & perforations. So that you can mount your terminal device without any problems.

Water protection

In order to achieve optimal water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Back
Base material:	Stainless steel
Volume single box in liters:	21,0 31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Depth in cm:	27,0 - 40,0
Weight in kg:	32,0
Delivery condition:	Delivery is partially disassembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).