
## Briefkasten Manufaktur® Lippe GmbH

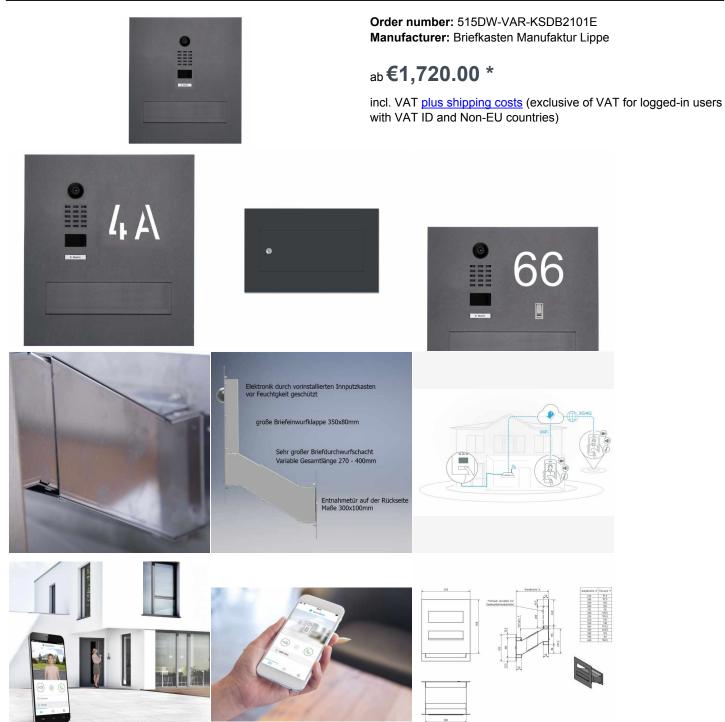

# Stainless steel wall pass-through mailbox designer model - RAL 7016 anthracite gray with DoorBird D2100E or D1100E video intercom - VIDEO Set

High-quality manufactured pass-through mailbox of the brand Mailbox Manufacture. Due to the variable shaft length between 270mm to 400mm, this mailbox can be used in pretty much all masonry. The mail removal takes place on the back. The front and rear stainless steel plates made of 2mm stainless steel V2A, powder coated according to RAL color can be invisibly attached to the wall thanks to the screw connection inside the shaft. There are no fixing screws to be seen. Integrated DoorBird IP video door station D2100E or D1100E. The DoorBird IP Video Door Station D2100E or D1100E is the smart solution for your entrance door. The IP Video Door Station can be operated as a stand-alone unit or integrated into an existing smart home platform. Even existing, classic installations such as a door chime or an electric door and gate opener can continue to be used with DoorBird and controlled via the app.

This is a real eye-catcher among mailboxes. Clear lines and no-frills design characterize the designer mailbox. Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur. Even the DoorBird was not only invented and developed in Germany, but is also produced in Berlin to this day. At DoorBird, "Made in Germany" is not just a seal, but a lived philosophy. The IP video door stations are manufactured in the DoorBird manufactory to guarantee the highest quality, durability and customer satisfaction.

• Designer stainless steel pass-through mailbox made of 2 mm stainless steel V2A 1.4301, powder coated according to RAL fine structure matt.

• Rear mail removal door 300x100mm, to open from left to right. Incl. 2 keys with key number.

• Mail slot from front, dimensions of slot: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending. Attention no removal protection!

- Dimension front panel W 450mm x H 500mm.
- Dimension cover plate with removal door W 450mm x H 250mm.
- Dimension letter chute W 380mm x H 210-280mm.
- Variable shaft length 270-400mm.

• Optionally with house number, backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0.1-4W for LED lighting of the house number.

Incl. DoorBird IP video door station D2100E or D1100E installed.

#### Important information

#### Camera or intercom preparation

Intercom systems must be connected by an electrician. Contact your trusted electrician for planning, installation and wiring.

#### Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

Number of parties:	1
Item withdrawal:	Back
Base material:	Stainless steel
Connection technology:	LAN
Volume single box in liters:	21,0   31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Depth in cm:	27,0 - 40,0
Weight in kg:	32,0
Delivery condition:	Delivery is partially disassembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).