






Order number: 215-AP-1-SP-ZF-IND

Note: After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.

Manufacturer: Briefkasten Manufaktur Lippe

ab **€1,201.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

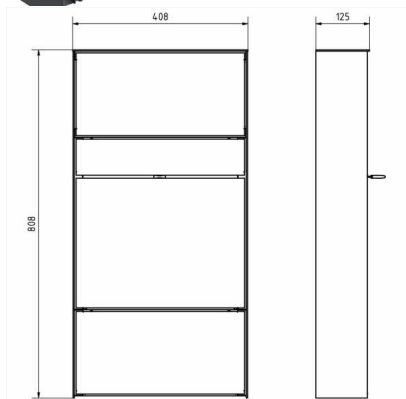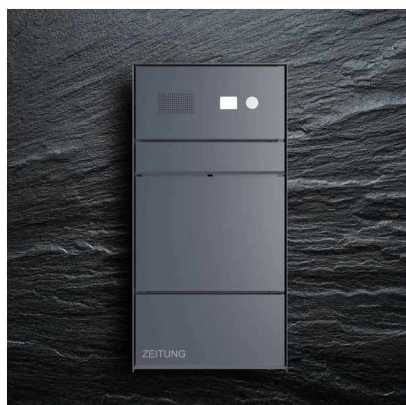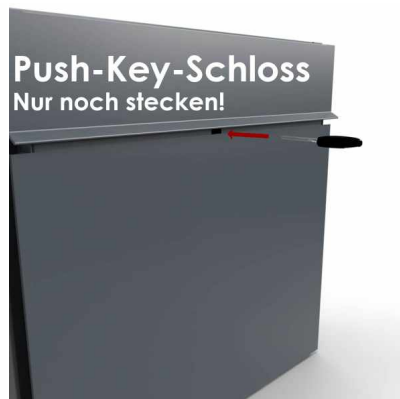

Design surface mailbox GOETHE AP with newspaper box - RAL of your choice - bell intercom box

High-quality manufactured surface-mounted mailbox with newspaper compartment and bell intercom box in flush design. The modern GOETHE mailbox is ideal for the sophisticated entrance area. The linear design without visible lock makes this mailbox look particularly elegant. The individually equipable bell intercom box is available with a flush-mounted bell button, a nameplate or lettering in combination with your desired intercom preparation (built-in speaker not included) and/or camera preparation. The dimensions of the single box allow a capacity of approx. 16 liters, the large insertion guarantees no crumpled mail even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is invisibly hidden inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this mailbox is designed so that the removal door prevents mail from falling towards you. Due to the water drainage edge, the mail inside is optimally protected from the weather. The insertion flap is equipped with high-quality axle dampers, so quiet closing is guaranteed and there is no annoying rattling due to weather influences.

The surface-mounted letterboxes of the GOETHE collection are characterized by the consistent use of stainless steel and aluminum. The result is very high durability and sustainability. The design has been developed by our own engineers with regard to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are directly available in our store.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- High-quality surface-mounted mailbox made of stainless steel and aluminum.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder coated in RAL of your choice.
- Innovative push-key lock with 2 keys.
- Letter insertion and removal from the front. Insertion flap with high-quality axle dampers for very quiet insertion of mail.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape, here fit even large letters without bending.
- Removal door can be opened from top to bottom. So the mail can not fall against you.
- Optional house number inscription approx. 70-80mm high.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser inscription "NEWSPAPER (will be engraved in your desired language)" (font ARIAL, if name/house number, then equal to your chosen font).
- Newspaper box can be opened from bottom to top.
- Functional box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder coated in RAL of your choice.
- Optional replaceable nameplate made of stainless steel with laser inscription, nameplate made of plexi or direct inscription illuminated.
- 8-12V DC short stroke bell push button with LED ring illumination (blue, white, red or green). The illumination of the bell push buttons cannot be supplied by the control unit. It must be connected to an additional 8-12V DC power supply.
- An 8-12V DC short-stroke light button with pictogram is available as an option.
- Preparation (built-in speaker not included) for intercom possible.
- Optional universal adapter for all commercially available built-in speakers.
- Optional preparation (camera not included) for a camera.
- Optimal rain protection by rain protection edges and a rain roof made of 3mm aluminum AlMg3 W19, powder-coated in RAL of your choice.
- Side panel made of 3mm aluminum AlMg3 W19, powder coated in RAL of your choice.
- Incl. mounting rail for wall mounting.

Important information

Camera or intercom preparation

We recommend that the electrical installation is always carried out by an electrician.

We offer the preparation of intercom stations from various manufacturers for our mailboxes. The preparation does not include terminal equipment, it is the provision of the screw mounts, holes & perforations. So that you can mount your terminal device without any problems.

Water protection

In order to achieve optimal water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel, Aluminum
Height single box in cm:	BK 40.0 ZF 20.0
Width single box in cm:	40,0
Volume single box in liters:	BK 16.0 ZF 8.0
Height letter slot in cm:	3,5
Width letter slot in cm:	36,0
Height letterbox system in cm:	80,0
Width letterbox system in cm:	40,0
Total width in cm:	40,8
Depth in cm:	10.0 + 2.5 Rain roof
Weight in kg:	24,0
Delivery condition:	Delivery is assembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).