






Order number: 215-SP-UP-1-DB

Manufacturer: Briefkasten Manufaktur Lippe

ab **€1,100.60 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

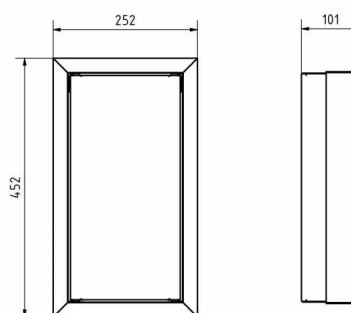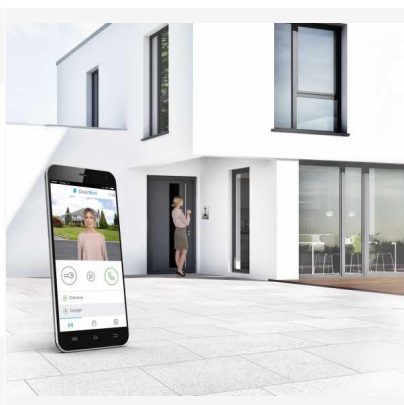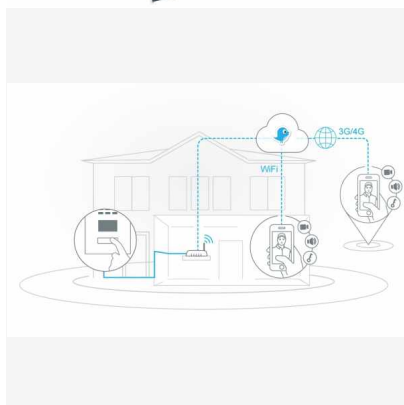

Design flush-mounted door station GOETHE UP with DoorBird video intercom - RAL of your choice

High quality manufactured door station with a seamlessly integrated DoorBird IP video door station D2100E or D1100E in flush design. The DoorBird IP Video Door Station D2100E or D1100E is the smart solution for your front door. The IP Video Door Station can be operated as a stand-alone unit or integrated into an existing smart home platform. Existing, classic installations such as a door chime or an electric door and gate opener can also continue to be used with DoorBird and controlled via the app.

The letterbox systems in the GOETHE collection are characterized by the consistent use of stainless steel. The result is a very high durability and sustainability. The design has been developed by our own engineers with regard to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are directly available in our store.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- Flush-mounted door station completely made of stainless steel.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Functional box (BH 200x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder coated in RAL of your choice.
- Cover can be opened from top to bottom.
- With name inscription either laser engraving or through engraving (illuminated).
- Plaster cover frame made of stainless steel angle profile 25 x 58 mm, powder-coated in RAL color.
- Incl. DoorBird IP video door station D2100E or D1100E installed.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, installation and wiring.

Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Base material:	Stainless steel
Connection technology:	LAN, WLAN
Number of bell buttons:	1
Height in cm:	Außenmaß 45,0 Einbaumaß 40,3
Width in cm:	Außenmaß 25,0 Einbaumaß 20,3
Overall height in cm:	recommended 150.0 - 170.0
Depth in cm:	10.0 installation dimension 9.85
Weight in kg:	5,0
Delivery condition:	Delivery is assembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).