






Order number: 215-STL-160-1ZFSP-DB

Manufacturer: Briefkasten Manufaktur Lippe

ab **€3,862.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

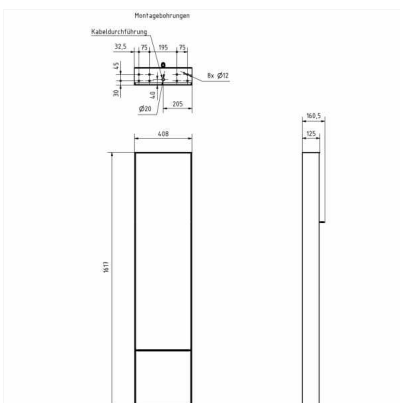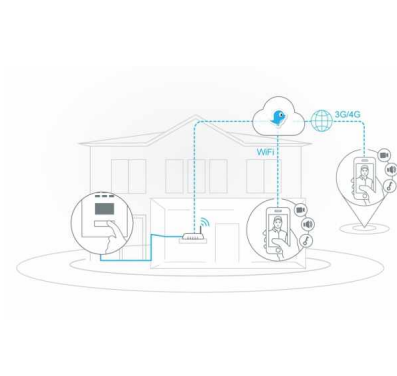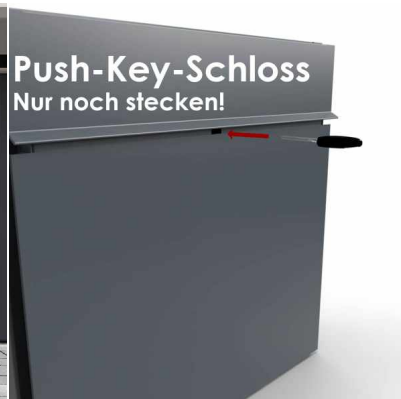

Design mailbox stele GOETHE with newspaper compartment - RAL of your choice - DoorBird Video intercom system

High-quality manufactured mailbox stele with newspaper compartment and a seamlessly integrated DoorBird IP video door station D2100E or D1100E in flush design. The DoorBird IP Video Door Station D2100E or D1100E is the smart solution for your front door. The IP Video Door Station can be operated as a stand-alone unit or integrated into an existing smart home platform. Even existing, classic installations such as a door chime or an electric door and gate opener can continue to be used with DoorBird and controlled via the app.

The dimensions of the single box allow a capacity of approx. 16 liters, the large insertion guarantees no crumpled mail even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is hidden invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this mailbox is designed so that the removal door prevents mail from falling towards you. Due to the water drainage edge, the mail inside is optimally protected from the weather. The insertion flap is equipped with high-quality axle dampers, so quiet closing is guaranteed and there is no annoying rattling due to weather conditions.

The letterboxes of the GOETHE collection are characterized by the consistent use of stainless steel and aluminum. The result is very high durability and sustainability. The design has been developed by our own engineers with a view to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are directly available in our store.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- High quality mailbox column made of stainless steel and aluminum.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder coated in RAL of your choice.
- Innovative push-key lock with 2 keys.
- Letter insertion and removal from the front. Insertion flap with high-quality axle dampers for very quiet insertion of mail.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape, here fit even large letters without bending.
- Removal door can be opened from top to bottom. So the mail can not fall against you.
- Optionally with house number and name inscription, lasered.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser inscription "NEWSPAPER (will be engraved in your desired language)" (font ARIAL, if name/house number, then equal to your chosen font).
- Newspaper box can be opened from bottom to top.
- Functional box (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder coated in RAL of your choice.
- Optimal rain protection by rain protection edges and a rain canopy made of 3mm aluminum AlMg3 W19, powder coated in RAL of your choice.
- Side panel made of 3mm aluminum AlMg3 W19, powder coated in RAL of your choice.
- Rear panel and base plate made of 6mm aluminum AlMg3 W19, powder coated in RAL of your choice.
- Invisible mounting in the pillar due to reinforced base plate.
- Invisible cable feed through the body possible. The overall height is 1.65 m.
- Incl. DoorBird IP video door station D2100E or D1100E installed.

Important information

Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.

Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy. Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel, Aluminum
Connection technology:	WLAN, LAN
Height single box in cm:	BK 40.0 ZF 20.0
Width single box in cm:	40,0
Volume single box in liters:	BK 16.0 ZF 8.0
Height letter slot in cm:	3,5
Width letter slot in cm:	36,0
Height letterbox system in cm:	100,8
Width letterbox system in cm:	40,8
Overall height in cm:	161,4
Total width in cm:	40,8
Depth in cm:	10.0 + 2.5 Rain roof
Weight in kg:	47,0
Delivery condition:	Delivery is assembled

Shipping information: Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).