




Order number: 215-UP-1-SPSZF-LX-R-LOX1

Manufacturer: Briefkasten Manufaktur Lippe

ab **€1,551.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

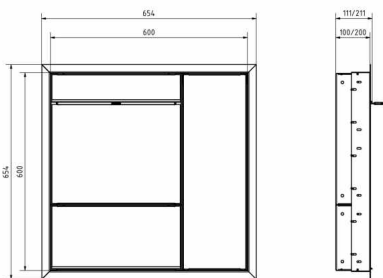

Design flush-mounted mailbox GOETHE UP lateral with newspaper compartment - RAL of your choice - LOXONE Intercom prepared

High-quality manufactured flush-mounted mailbox with newspaper compartment and lateral LOXONE Intercom in flush design. The modern GOETHE mailbox is ideal for the sophisticated entrance area. The linear design without visible lock makes this mailbox look particularly elegant. The LOXONE Intercom can be seamlessly inserted into the flush design and exchanged at any time. The preparation is intended for 1 piece LOXONE Intercom (incl. perforation for sound outlet) or 1 piece LOXONE Intercom (incl. perforation for sound outlet) + 1 piece LOXONE NFC Code Touch/Touch Pure.

The dimensions of the single box allow a capacity of approx. 16 liters, the large insertion guarantees no crumpled mail even with DIN C4 envelopes and magazines or after several days of absence. The innovative push-key lock is invisibly hidden inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. With the arrangement of the lock, this mailbox is designed so that the removal door prevents mail from falling towards you. Due to the water drainage edge, the mail inside is optimally protected from the weather. The insertion flap is equipped with high-quality axle dampers, so quiet closing is guaranteed and there is no annoying rattling due to weather conditions. The letterboxes of the GOETHE collection are characterized by the consistent use of stainless steel. The result is a very high durability and sustainability. The design has been developed by our own engineers with a view to high flexibility or modularity, easy spare parts assembly and uncomplicated self-assembly. Spare parts for all GOETHE systems are directly available in our store.

Thanks to the design, self-assembly is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

- Flush-mounted mailbox completely made of stainless steel.
- Quality production - Made in Germany by Briefkasten Manufaktur Lippe.
- Letterbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder coated in RAL of your choice.
- Innovative push-key lock with 2 keys.
- Letter insertion and removal from the front. Insertion flap with high-quality axle dampers for very quiet insertion of mail.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape, here fit even large letters without bending.
- Removal door can be opened from top to bottom. So the mail can not fall against you.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL of your choice with stainless steel laser inscription "NEWSPAPER (will be engraved in your desired language)" (font ARIAL, if name/house number, then equal to your chosen font).
- Newspaper box can be opened from bottom to top.
- Functional box (BH 200x600mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder coated in RAL of your choice.
- Optionally with house number, lasered or house number, backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0,1-4W for LED illumination of the house number.
- Optionally with name inscription, lasered or engraved (illuminated).
- Plaster cover frame made of 2mm stainless steel angle profile 25 x 58 mm, powder coated in RAL color.
- **WITHOUT LOXONE intercom/system components!**

Important information

Camera or intercom preparation

We recommend that the electrical installation is always carried out by an electrician.

We offer the preparation intercom stations of various manufacturers for our mailboxes. The preparation does not include terminal equipment, it is the provision of the screw mounts, drill holes & perforations. So that you can mount your terminal device without any problems.

Water protection

In order to achieve optimal water protection for your mail, the mailbox or mailbox system should be located under a canopy if possible.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress in accordance with DIN EN 13724. Water ingress is not a reason for complaint.

Abmessungen & Details

| | |
|--------------------------------|--|
| Number of parties: | 1 |
| Item withdrawal: | Front |
| Base material: | Stainless steel |
| Height single box in cm: | BK 40.0 ZF 20.0 |
| Width single box in cm: | 40,0 |
| Volume single box in liters: | BK 16.0 ZF 8.0 |
| Height letter slot in cm: | 3,5 |
| Width letter slot in cm: | 36,0 |
| Height letterbox system in cm: | Outer dimension 65.2 Installation dimension 60.5 |
| Width letterbox system in cm: | Outer dimension 65.2 Installation dimension 60.5 |
| Overall height in cm: | recommended 150.0 - 170.0 |
| Total width in cm: | 65,0 |
| Depth in cm: | 10.0 installation dimension 10.35 |
| Weight in kg: | 21,0 |
| Delivery condition: | Delivery is assembled |
| Shipping information: | Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately). |