





**Order number:** 381-VA-2-SP-ZF

**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€1,081.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)

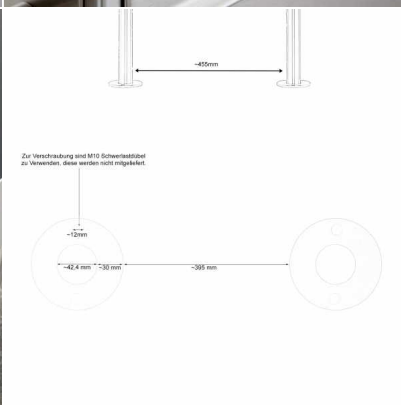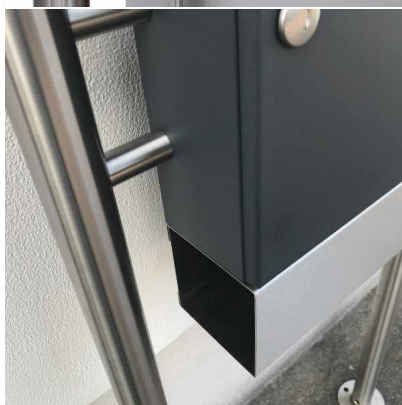

## 2-compartment Letterbox, freestanding design BASIC 381-VA-ZF with bell - speech part & newspaper tube

Modern 2-fold free-standing letterbox made in Germany by Briefkasten Manufaktur.

The mailbox is made entirely of weather-resistant stainless steel V2A, ground. The very high quality workmanship and the sophisticated concept make this stainless steel free-standing letterbox our top seller. A rain drainage edge for optimum water protection, a double-edged insertion flap with rubber buffer, the solid changeable name plate, a practical mail holding bracket and the very robust lock characterize this stainless steel free-standing letterbox.

Thanks to the construction method, self-assembly is uncomplicated.

### • 2-compartment free-standing letterbox made of weatherproof V2A stainless steel 1.4301, grinded

- The system is created at the letterbox manufactory. German quality production "Made in Germany".
- The letterbox complies with DIN/EN 13724. Insertion size (3.5 cm x 32.5 cm) for C4 crosswise, here fit even large letters without bending.
- Insertion flaps with noise-reducing rubber buffers for very quiet insertion of mail.
- The door can be opened from left to right.
- Incl. 2 keys with key number, changeable name plate under the access flap and mail holding bracket per mailbox.
- Newspaper compartments, open on both sides, made of stainless steel V2A, polished. Dimensions: 355x100x100mm.
- Additional rain protection can be achieved with the optional rain protection roof made of stainless steel V2A, polished.
- **Speech bell part made of stainless steel V2A, polished**
- Speech hole with universal adapter. (Intercom system / built-in speaker not included). Optionally also without speech perforation.
- Universal adapter is suitable for all commercially available built-in speakers (Siedle, Ritto, TCS, Busch-Jäger, Gira, Legrand Bticino, ELCOM, Auerswald, Comelit and many more).
- 2x round stainless steel bell push button type: Grothe Protact, max. 24 V AC/DC, 1,5 A, IP 54 (pressure force limitation).
- Anti-vandalism - the nameplate is dent-proof and impact-resistant, the plastic is flame-retardant.
- Cable access: Ø 10.4 mm (right side). Invisible cable routing through the stand element.
- The stand elements are made of 42.4 mm V2A stainless steel 1.4301, ground for screw mounting or setting in concrete.

### Important information

#### Camera or intercom preparation

The intercom systems must be connected by an electrician. Contact your trusted electrician for planning, installation and wiring.

#### Water protection

Mail is protected from moisture and contamination only when it is fully inserted and the flap is closed. In certain extreme weather conditions, water may nevertheless enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

Number of parties:	2
Item withdrawal:	Front
Base material:	Stainless steel
Height single box in cm:	33,0
Width single box in cm:	35,5
Volume single box in liters:	12,0
Height letter slot in cm:	3,5
Width letter slot in cm:	32,5
Height letterbox system in cm:	96,0
Width letterbox system in cm:	35,5
Overall height in cm:	150.0 + 7.0 attached rain roof
Total width in cm:	53,5
Depth in cm:	10,0
Weight in kg:	28,0
Delivery condition:	Delivery is made in blocks, stand elements / letterbox divided
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).