




**Order number:** 592D-B-VAR-KSDB-R-UP100



**Manufacturer:** Briefkasten Manufaktur Lippe

ab **€1,370.00 \***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users  
with VAT ID and Non-EU countries)

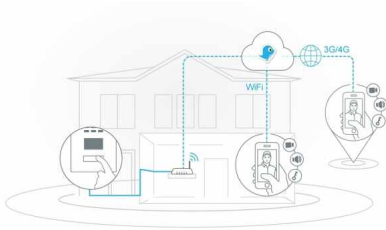

Eingebaute Dämpfungselemente lassen die Einwurfsklappe langsam und leise schließen

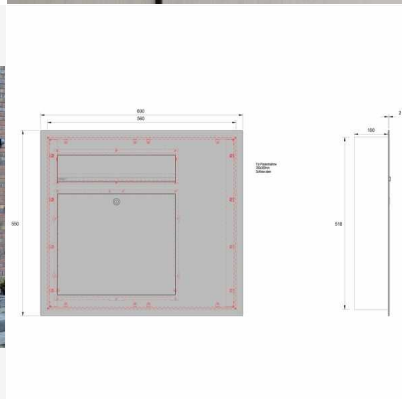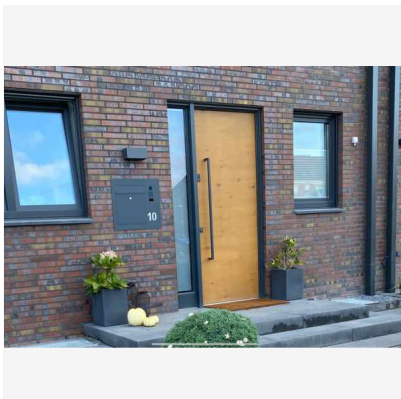

## Stainless steel mailbox designer model BIG - laterally with DoorBird D2100E or D1100E video intercom - RAL of your choice - VIDEO set

High-quality manufactured mailbox of the brand Briefkasten Manufaktur in extra large format. Integrated DoorBird IP video door station D2100E or D1100E. The DoorBird IP Video Door Station D2100E or D1100E is the smart solution for your front door. The IP Video Door Station can be operated as a standalone unit or integrated into an existing smart home platform. Even existing, classic installations such as a door chime or an electric door and gate opener can continue to be used with DoorBird and controlled via the app.

This is a real eye-catcher among mailboxes. Clean lines and no-frills design characterize the designer mailbox. Our products have a high value, reliable functionality and their own identity. Made by Briefkasten Manufaktur. Also the DoorBird was not only invented and developed in Germany, but is also produced in Berlin to this day. At DoorBird, "Made in Germany" is not just a seal, but a lived philosophy. The IP video door stations are manufactured in the DoorBird manufactory to guarantee the highest quality, durability and customer satisfaction.

- Designer stainless steel flush-mounted mailbox made of 2 mm stainless steel V2A, powder coated according to RAL fine structure matt. Optionally also available as surface-mounted version.
- Front-side mail removal door 350 mm x 300 mm, to open from top to bottom. Incl. 2 keys with key number.
- Mail slot from front, dimensions of slot: W 35 cm x H 6.3 cm, C4 landscape. Very large letters fit in here without bending. Attention no removal protection!
- **From now on with built-in damping elements, these let the insertion flap close slowly and quietly.**
- Dimensions flush-mounted or surface-mounted box: H 510 mm x W 560 x D 100 | 150 mm. ATTENTION: The front panel of the surface-mounted box also protrudes by 2 cm.
- Plaster box made of galvanized steel. Surface box made of stainless steel V2A, ground on all sides.
- Plaster box with pre-punched cable inlets on all sides.
- Optionally with house number, backlit in white incl. EVN LED power supply / transformer IP65 12V/DC 0.1-4W for the LED lighting of the house number.
- Incl. DoorBird IP video door station D2100E or D1100E installed.

### Important information

#### Camera or intercom preparation

**Intercom systems must be connected by an electrician. Contact your trusted electrician for planning, mounting and installation.**

#### Water protection

In order to achieve optimum water protection for your mail, the mailbox or mailbox system should, if possible, be located under a canopy.

Mail is only protected from water when it is completely inserted in the box and the insertion flap is closed. Mail that is not completely inserted allows moisture and dirt to enter the mailbox. Therefore, it is necessary to plan sufficiently sized mailboxes for the upcoming needs. In certain extreme weather conditions, water can still enter (according to DIN EN 13724 up to 1ccm). This is not a reason for complaint.

### Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Connection technology:	LAN
Height single box in cm:	51,0   55,0
Width single box in cm:	56,0   60,0
Volume single box in liters:	21,0   31,0
Height letter slot in cm:	6,3
Width letter slot in cm:	35,0
Depth in cm:	10,0   15,0
Weight in kg:	32,0
Delivery condition:	Delivery is assembled
Shipping information:	Depending on the order volume, delivery is made by parcel shipment or bulky goods shipment. Partial deliveries are possible for products that can be disassembled (e.g., for floor-standing mailboxes, the stand & box can be shipped separately).