



Order number: 599-VAR-HL-B

Note: After your order, you will receive a design drawing by email as a PDF to realize your wishes even to the last detail. Here, your wishes will be addressed in detail.

Manufacturer: Briefkasten Manufaktur Lippe

ab **€2,389.00 ***

incl. VAT [plus shipping costs](#) (exclusive of VAT for logged-in users with VAT ID and Non-EU countries)


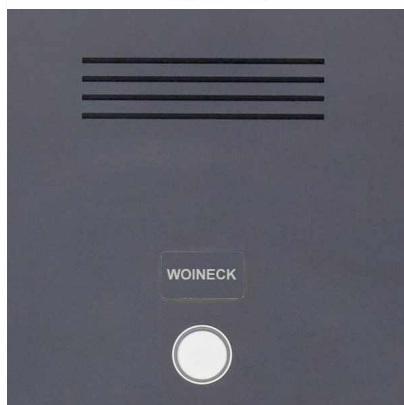


Abbildung ist eine schematische Darstellung und stellt keine verbindliche Spezifikation dar. Die Abbildung ist als Orientierungshilfe zu verstehen und ist nicht zur Ausführung geeignet. Die Abbildung ist als Orientierungshilfe zu verstehen und ist nicht zur Ausführung geeignet. Die Abbildung ist als Orientierungshilfe zu verstehen und ist nicht zur Ausführung geeignet.

Eingebaute Dämpfungselemente lassen die Einwurfsklappe langsam und leise schließen

Stainless steel mailbox column Designer with house number rear illuminated - RAL of your choice - INDIVIDUAL

Stylish stainless steel column made of 1.5mm stainless steel V2A 1.4301, powdered in RAL fine structure matt with rear lights. The column is fully welded, which means that no rivets or screws are visible. The mailbox module is also inserted into the stele with invisible screw connection. The mailbox module is also made of 2mm stainless steel V2A 1.4301, powder-coated in RAL color and can still be exchanged for a new mailbox module after many years. High-quality manufactured letterbox column of the brand Briefkasten Manufaktur. Made in Germany, Bad Salzungen.

- The mailbox module consists of 2mm stainless steel V2A 1.4301, powder-coated in RAL color.
- Fronts side post-withdrawal door 240 mm x 300 mm, to open from top to bottom. Including 2 key with key number.
- Settling from the front, dimensions of the insertion: W 24 cm x H 3.5 cm, C4 high.
- **from now on with built-in damping elements, which let the throw-in flap slowly and quietly close.**
- The steles are equipped with modules that can still be exchanged later.
- House number approx. 70mm high (max. 3-digit) with power-saving LED lighting 12V DC approx. 50mA / 1W, white.
- optionally interchangeable name tag made of stainless steel with laser lettering or name tag made of plexiglass.
- Preparation (installation speaker not included) for intercom.
- Optional preparation (not included in the scope of delivery) for a camera.
- 8-12V DC Kurzhub bell button with LED ring lighting (blue, white, red or green). The lighting of the bell button cannot be supplied by the control unit. It must be connected to an additional power supply 8-12 V DC.
- Optional is an 8-12V DC short-lived light button with pictogram.
- incl. EVN LED & MINUS; Network device/Trafo IP65 12V/DC 0.1 & minus; 4W for the LED lighting (house number, bell button and name tag if selected).
- Optional is a backstream box made of stainless steel V2A 1.4301, powder-coated in RAL color.
- The fully welded stand Column consists of 1.5mm stainless steel V2A 1.4301, powder-coated in RAL color. Height is 1.60 m.
- Invisible cable supply possible by the corpus.
- The stele is equipped with a fus plate made of VA. This is 10 mm thick and is refined with a cover panel. This is how the fastening dowels are covered.

important information

camera or voice center preparation

We always recommend the electrical installation to be carried out by an electrical installer.

We offer the preparation of cameras & speakers from different manufacturers for our mailboxes. The preparation does not contain any end devices, which are the provision of the screw recordings, bores and perforations. So that you can easily install your device.

water protection

In order to achieve optimal water protection of your post, the mailbox or the mailbox system should be under a canopy if possible.

The post office is only protected from water if it is completely stored in the box and the throw-in flap is closed. Unskinned mail enables the penetration of moisture and dirt into the mailbox. It is therefore necessary to plan sufficiently dimensioned mailboxes for the upcoming need. In certain extreme weather conditions, water can still occur (according to DIN EN 13724 to 1ccm). This is not a reason for complaint.

Abmessungen & Details

Number of parties:	1
Item withdrawal:	Front
Base material:	Stainless steel
Height single box in cm:	71,0 75,0
Width single box in cm:	31,0 35,0
Volume single box in liters:	16,0
Height letter slot in cm:	3,5
Width letter slot in cm:	24,0
Overall height in cm:	160,0
Total width in cm:	40.0 (footplate 50.0)
Depth in cm:	10.0 (foot plate 20.0)
Weight in kg:	48,0
Delivery condition:	Delivery is assembled
Shipping information:	Delivery by forwarding agent on one-way pallet. Before delivery, the forwarding agent will contact you by phone to arrange the date.