2-unit freestanding mailbox system Design BASIC 385P-7016-SP with bell-intercom unit incl. side cladding & rain hood - horizontal mailboxes - Anthracite grey RAL 7016 | RAL 7016 Anthracite grey, fine texture, matt | Top | with 2 mailboxes



Product number 385P-7016-2-SP

Product description

Freestanding mailbox system BASIC 385P with bell/speech module for 2 households – RAL 7016 Anthracite grey

The freestanding BASIC 385P mailbox system for 2 households combines 2 separately usable mail compartments with an integrated bell-function housing. This creates a robust, visually unified entrance solution for two- and small multi-family houses, office and practice buildings, bringing together mail reception, doorbell buttons and the provision for compatible door communication in one unit. The bell-function housing is integrated directly into the overall unit.

The mailboxes are made from galvanised steel and powder-coated in RAL 7016 Anthracite grey fine-structure matt. A close-fitting side cladding with rain canopy and integrated rain channels supports weather protection. The solidly manufactured stand posts are made from anodised aluminium profile, are also powder-coated in RAL 7016 Anthracite grey and form a particularly stable, durable base for the freestanding unit.

Each of the 2 mail compartments has approx. 12 litres volume. The 35 × 265 mm mail slot is designed for DIN C4 items in portrait orientation. A noise-damping rubber lip reduces the impact of the flap. Mail is retrieved from the front; the collection doors open from left to right. Each mailbox is supplied with two keys with key number and a changeable nameplate located beneath the mail slot.

The advantages of the BASIC 385P mailbox system at a glance

Integrated bell-function housing

The unit combines 2 mailboxes with 2 stainless-steel bell push buttons and a speech aperture with universal adapter. This creates a central, tidy solution for mail and visitor communication.

Solid aluminium stand posts

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Solidly manufactured, anodised aluminium profiles form the stable base of the freestanding unit. The powder-coated construction combines high load capacity with a durable outdoor finish.

DIN C4 feed with 12 litres volume

The mailboxes each offer approx. 12 litres of mail volume. The 35 × 265 mm feed opening accepts DIN C4 items in portrait orientation without larger envelopes being unnecessarily folded.

Prepared for door communication

The speech aperture with universal adapter is prepared for many commercially available flush-fit speakers.

Robust BASIC quality in RAL 7016 Anthracite grey

Galvanised steel, stainless-steel components, solid aluminium stand posts and German manufacturing result in a resilient mailbox system for long-term use at the property entrance.

Equipment of the BASIC 385P mailbox system

Mailbox unit

Number of mailboxes 2 separately usable mail compartments
Mailbox dimensions 300 × 110 × 385 mm (W × H × D) per compartment
Mail volume Approx. 12 litres per mailbox
Material Galvanised steel; side cladding and rain canopy made from stainless steel V2A
Finish RAL 7016 Anthracite grey fine-structure matt
Feed opening 35 × 265 mm, suitable for DIN C4 portrait
Standard Mailboxes to DIN EN 13724

Bell and speech module

Bell-function housing Galvanised steel, powder-coated to match
Position Integrated into the unit
Bell push buttons 2 round stainless-steel bell push buttons Type 4
Speech aperture With universal adapter for commercially available flush-fit speakers
Nameplate Constructed to be dent- and impact-resistant

Solid aluminium stand posts

Stand posts Solidly manufactured, anodised aluminium profile
Coating Powder-coated in RAL 7016 Anthracite grey
Mounting options Either bolted installation or casting into concrete
Bolted installation Stand posts selectable in 1200 or 1600 mm
Casting into concrete Stand posts selectable in 1600 or 2000 mm
Delivery condition Stand posts and mailbox unit supplied in installation-friendly sections
Manufacture Made in Germany by Briefkasten Manufaktur Lippe

Note regarding the bell/speech module

The universal adapter is suitable for many commercially available flush-fit speakers. Intercom systems or flush-fit speakers, power supply and cabling are not part of the described basic equipment and must be provided to match the planned system.

Installation on a foundation

For bolted installation a flat and sufficiently load-bearing foundation is required. Fasteners should be selected to suit the foundation, unit weight and local installation conditions.

Installation by casting into concrete

For the cast-in version the extended aluminium stand posts are anchored vertically in a suitably dimensioned concrete foundation. Foundation dimensions and embedment depth must be matched to soil conditions, unit dimensions and local loads.

Note on weather protection

The rain canopy, close-fitting side cladding and integrated rain channels support weather protection. Postal items must be fully inserted so that the feed flaps can close completely. Under extreme weather conditions slight moisture ingress may occur despite construction in accordance with standards.

Product properties

Material	Steel, galvanised, Aluminium AlMg3 W19, Stainless steel V2A 1.4301
Series	BASIC
Number of bell push buttons	2 buttons
Functions	Light button, Intercom
Functional box prepared for manufacturer	GIRA, Busch Jaeger, Siedle, STR Elektronik, ELCOM, TCS, Ritto, ALGO, Telegärtner, Auerswald, Legrand Bticino, Comelit
Boxes by volume	Normal > 10 litres
Name labelling	Nameplate
Mounting type	Free-standing
Surface/colour	RAL 7016 anthracite grey
Number of boxes	with 2 letterboxes
Removal of mail	On the front

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Dimensions

Height of single box in mm	110.0
Width of single box in mm	300.0
Capacity in litres	12
Height of letterbox slot in mm	35.0
Width of letter slot in mm	265.0
Overall height in mm	1200.0 | 1600.0
Total width in mm	380.0
Depth in mm	435.0
Weight in kg	33
Delivery condition	Delivery is made in blocks; stand elements / mailbox are supplied separately.


Dimension drawing

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

Montagebohrungen

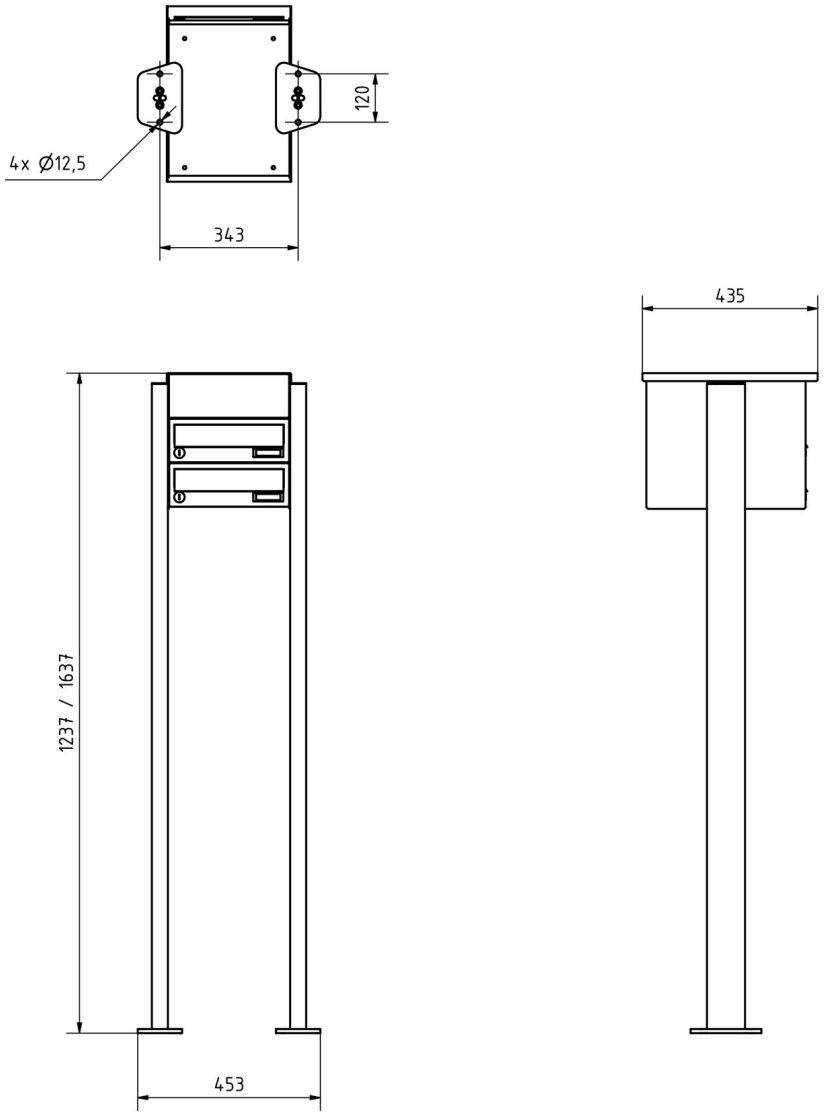


Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images



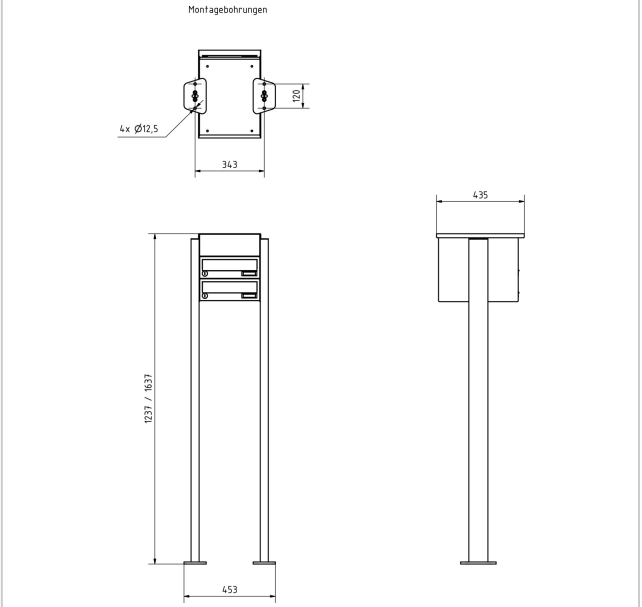






Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618



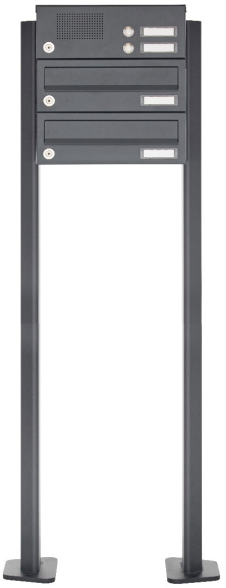





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618





Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618