Designer recessed large-capacity mailbox GOETHE UP with newspaper compartment - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set | with newspaper compartment | 200mm depth | Gira System 106 Complete Video Set 2DB Fingerprint



Product number 215-UP-1-SP-ZF-KSGI106FP-200

Product description

Design flush-mounted large-capacity mailbox GOETHE UP with newspaper compartment - RAL colour of your choice - GIRA System 106 Keyless In - VIDEO complete set

High-quality flush-mounted mailbox with newspaper compartment and seamlessly integrated Gira System 106 in a flush design. The modern GOETHE mailbox is ideal for a sophisticated entrance area. The straight-lined form without a visible lock gives this mailbox an especially elegant appearance. Three GIRA System modules are included, so the mailbox can be used immediately. The matching GIRA apartment station and the control unit to complete this mailbox are included. The modules can be exchanged later at will using the simple mounting system.

The dimensions of the single box provide a capacity of approx. 32 litres; the large letter slot guarantees that even DIN-C4 envelopes and magazines — or post after several days' absence — remain uncreased. The innovative Push-Key lock is hidden invisibly inside the mailbox. The key is simply inserted into the existing opening (no turning required) and the door opens. The position of the lock is designed so that the collection door prevents your post from falling out towards you. Because of the water drainage edge, the internal post is optimally protected from the weather. The insertion flap is equipped with high-quality pivot dampers, ensuring a quiet closing action and preventing disturbing rattling caused by weather influences.

The mailbox systems of the GOETHE collection are characterised by the consistent use of stainless steel. The result is very high durability and sustainability. The construction has been developed by our own engineers with a focus on high flexibility and modularity, easy spare part assembly and straightforward self-installation. Spare parts for all GOETHE systems are available directly in our shop.

Thanks to the design, self-installation is uncomplicated.

Protected utility model according to DPMA file number DE: 20 2021 101 679.5

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Flush-mounted mailbox completely made of stainless steel.
- Quality manufacture - Made in Germany by Briefkasten Manufaktur Lippe.
- Mailbox (BH 400x400mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Innovative Push-Key lock with 2 keys.
- Mail insertion and collection are from the front. Insertion flap with high-quality pivot dampers for very quiet posting.
- The mailbox complies with DIN/EN 13724. Insertion size (3.5 cm x 36.0 cm) for C4 landscape; large letters also fit without bending.
- Collection door opens from top to bottom. This prevents the post from falling out towards you.
- Newspaper compartment (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice with stainless steel laser inscription "ZEITUNG" (font ARIAL; if name/house number is chosen, it will use your selected font).
- Newspaper compartment opens from bottom to top.
- Function box (BH 400x200mm) made of stainless steel 1.4016 (non-rusting magnetic stainless steel), powder-coated in RAL colour of your choice.
- Nameplate made of stainless steel, powder-coated in RAL colour. A bell is laser-cut.
- Optional name inscription approx. 15–20 mm high.
- Optional house number inscription approx. 70–80 mm high.
- Plaster cover frame made from 2 mm stainless steel angle profile 25 x 58 mm, powder-coated in RAL colour.
- Incl. GIRA apartment station, power supply & control unit included, System 106 door station module, Keyless In fingerprint module & camera module installed.

GIRA

Camera module Gira System 106 - 5561 000, installed without cabling

- Behind the replaceable black glass panel is a high-quality camera with high light sensitivity. With a detection angle of 100°, the user always has a clear view of what is happening at their front door.

Keyless In fingerprint module Gira System 106 - 5551 920, installed

The GIRA fingerprint module as a professional biometric access control system based on next-generation surface-scan technology. Commissioning and user management are carried out via the Gira Keyless In app.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

- Can be used as a stand-alone device with Gira TKS switching actuators or in combination with the Gira door communication system as a door-call system for buildings with multiple residential units.
- Scans the lowest skin layer using high frequency. High recognition rate and tamper resistance.
- Evaluation of the unique characteristic features of the living human finger.
- Up to 99 fingers can be managed by the fingerprint reader unit.
- Reliable recognition of fingers that have minor injuries from activities such as gardening (only the top skin layer injured).
- Data protection through encryption methods.
- Fast reaction time from placing the finger to release: up to 30 stored fingers approx. 1 s, up to 99 stored fingers approx. 3 s.
- Night design of the fingerprint area for orientation using white LED illumination.
- 360° finger placement possible.
- 3-colour LED status indicator for visual signalling during programming and operation.
- Master PIN on an enclosed sealed security card, for use if the administrator finger is no longer available. The device can be factory-reset with the enclosed security card.
- Acknowledgement buzzer for acoustic signalling for the user or installer.
- Acoustic warning tone in case of unauthorised removal of the fingerprint module for sabotage detection. Sabotage circuit with switching actuator in the door communication system.
- Inputs and outputs: connector strip for the Gira door communication system.

Door station module Gira System 106 - 5565 920, installed without cabling

- Compact audio module with integrated call button for communication between inside and outside.
- A high-quality microphone and a weatherproof loudspeaker ensure good intelligibility.
- Power supply via 2-wire bus. Additional connection for central locking (e.g. required from the 3rd camera module).
- All other System 106 modules (except the audio module) are supplied with power via the door station module.

Apartment station Gira Video AP 7 1209xx, included

- Video apartment station with a 17.78 cm (7") TFT colour display and convenient hands-free function for surface-mounted installation or wall mounting with flush-mounted device box or cavity wall box. With the optional stand (see Accessories) also suitable for placement on furniture. A 32 GB SD memory card is included for internal image storage. Full-area glass front with touch functionality and tactile feedback.

Control unit Video REG Gira 1288 00, included

- Control unit for supplying the audio and video components of the Gira door communication bus.
- Supplies the polarity-proof and short-circuit-proof 2-wire bus when using video components such as colour camera and TFT colour display.
- Up to 2 door stations with colour camera and 28 apartment stations with TFT colour display can be powered via the Video control unit.
- In total, up to 15 colour cameras can be controlled by the Video control unit (5 video door stations and 10 TKS camera gateways), of which two door stations with colour camera can be powered by the Video control unit. The additional colour cameras must each be operated with their own power supply for door communication.
- Self-resetting electronic short-circuit and overload detection of the operating voltages and the bus connection.
- Buttons for system and door-opener programming.
- LED status indicators for operation, overload, system programming and door-opener programming.
- AC 12 V output for powering a conventional electric door opener.
- Relay output for switching a door opener with its own power supply.
- Door opener switching time steplessly adjustable from 1 to 10 s.

Power supply DC 24 V 300 mA Gira 1296 00, included

- DC 24 V power supply for supplying door communication components.
- Power supply for Keyless In module.

Important information

Preparation for camera or intercom

The intercom systems must be connected by an electrician. Please contact a qualified electrician of your choice for planning, installation and commissioning.

Water protection

To achieve optimal water protection for your post, the mailbox or mailbox system should, where possible, be located under a porch or canopy.

Postal items are only protected from water if they are placed fully inside the box and the insertion flap is closed. Post that is not fully inserted allows moisture and dirt to enter the mailbox. This system is protected against water ingress according to DIN EN 13724. Water ingress is not a reason for complaint.

Product properties

Surface/colour	RAL 9005 deep black, RAL 3004 crimson red, DB 703 iron mica, RAL 7016 anthracite grey, RAL of your choice (according to colour table), RAL 9007 grey aluminium, RAL 9016 traffic white
Series	GOETHE
Connection technology	2-wire
Number of bell push buttons	1 button
Functions	Newspaper compartment, Camera, Intercom, Fingerprint
Functional box prepared for manufacturer	GIRA
Material	Stainless steel V2A 1.4301, Stainless steel 1.4016 (non-rusting magnetic stainless steel)
House number	House number as laser engraving
Name labelling	Laser-engraved
Removal of mail	On the front
Number of boxes	with 1 letterbox
Boxes by volume	Large > 16 litres
Mounting type	Flush-mounted

Dimensions

Height of single box in mm	BK 400.0 | ZF 200.0
Width of single box in mm	400.0
Capacity in litres	BK 32.0 | ZF 16.0
Height of letterbox slot in mm	35.0
Width of letter slot in mm	360.0
Height of letterbox in mm	External dimension 852.0 | Installation dimension 820.0
Width of letterbox system in mm	External dimension 450.0 | Installation dimension 420.0
Total width in mm	450.0
Depth in mm	100.0 | Installation dimension 103.5
Weight in kg	17
Delivery condition	Delivered pre-assembled.

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110


Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618

More images







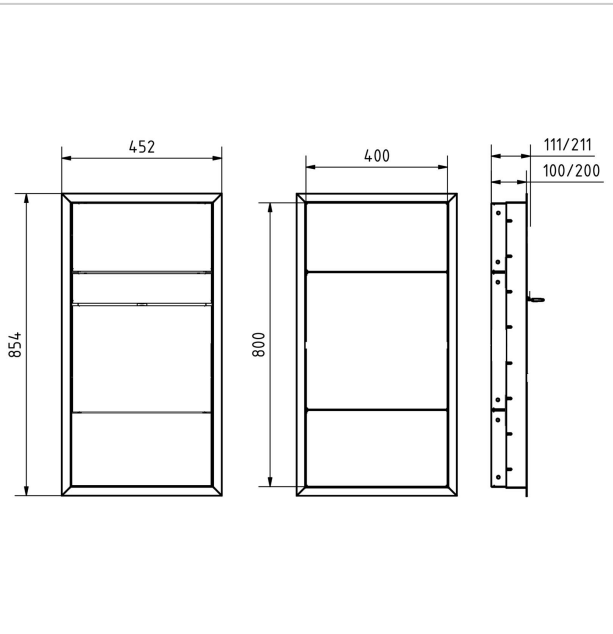

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen


www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







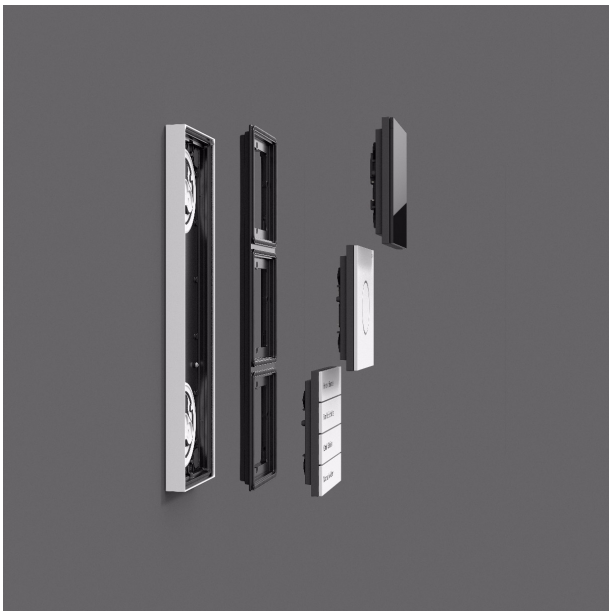

Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618







Briefkasten Manufaktur Lippe GmbH
Werler Straße 60
32105 Bad Salzuflen

www.briefkasten-manufaktur.de
info@briefkasten-manufaktur.de
Tel.: +49 5222 807110

Geschäftsführer Oliver Woineck
Ust.ID.Nr. DE303690847
Handelsregister Amtsgericht Lemgo, HRB 8618